




# Photometric test report

<b>Family</b> <b>Streetlight 31 midi toolless</b>	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> <b>59580_92</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO - Smart Interface <b>Rated values</b> Net luminous flux = 18750 lm Power consumption = 142.8 W Luminous efficacy = 131.3 lm/W	<b>serial documentation</b> <b>10.04.2024</b>





**Luminous intensity in cd/klm** C180-0 C185-5 C190-10 C270-90 **Imax: 876 cd/klm**

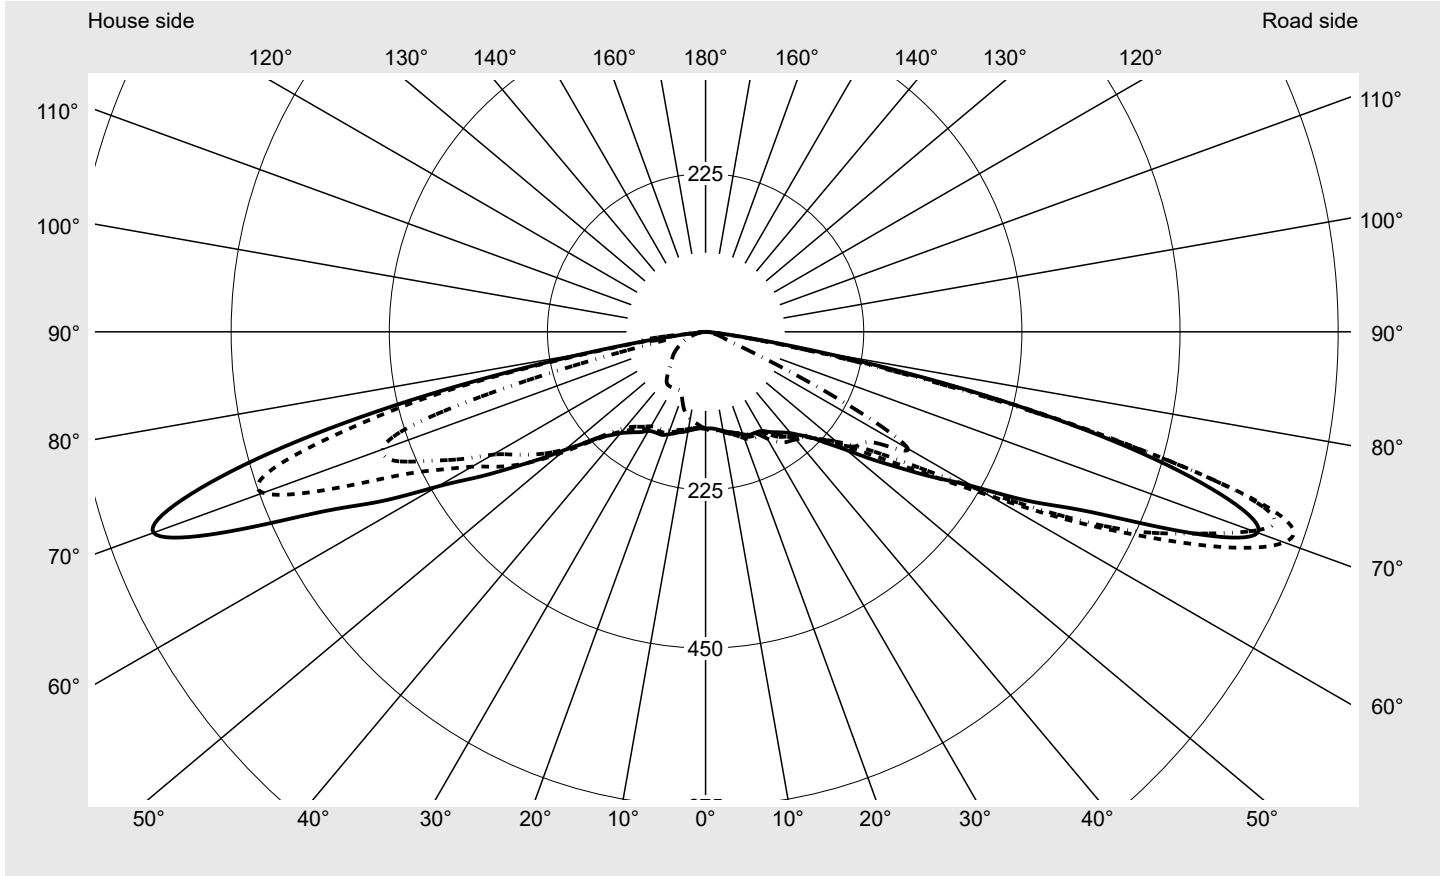

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	876.0
Imax 80°	162.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> 59580_92
---	--	------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

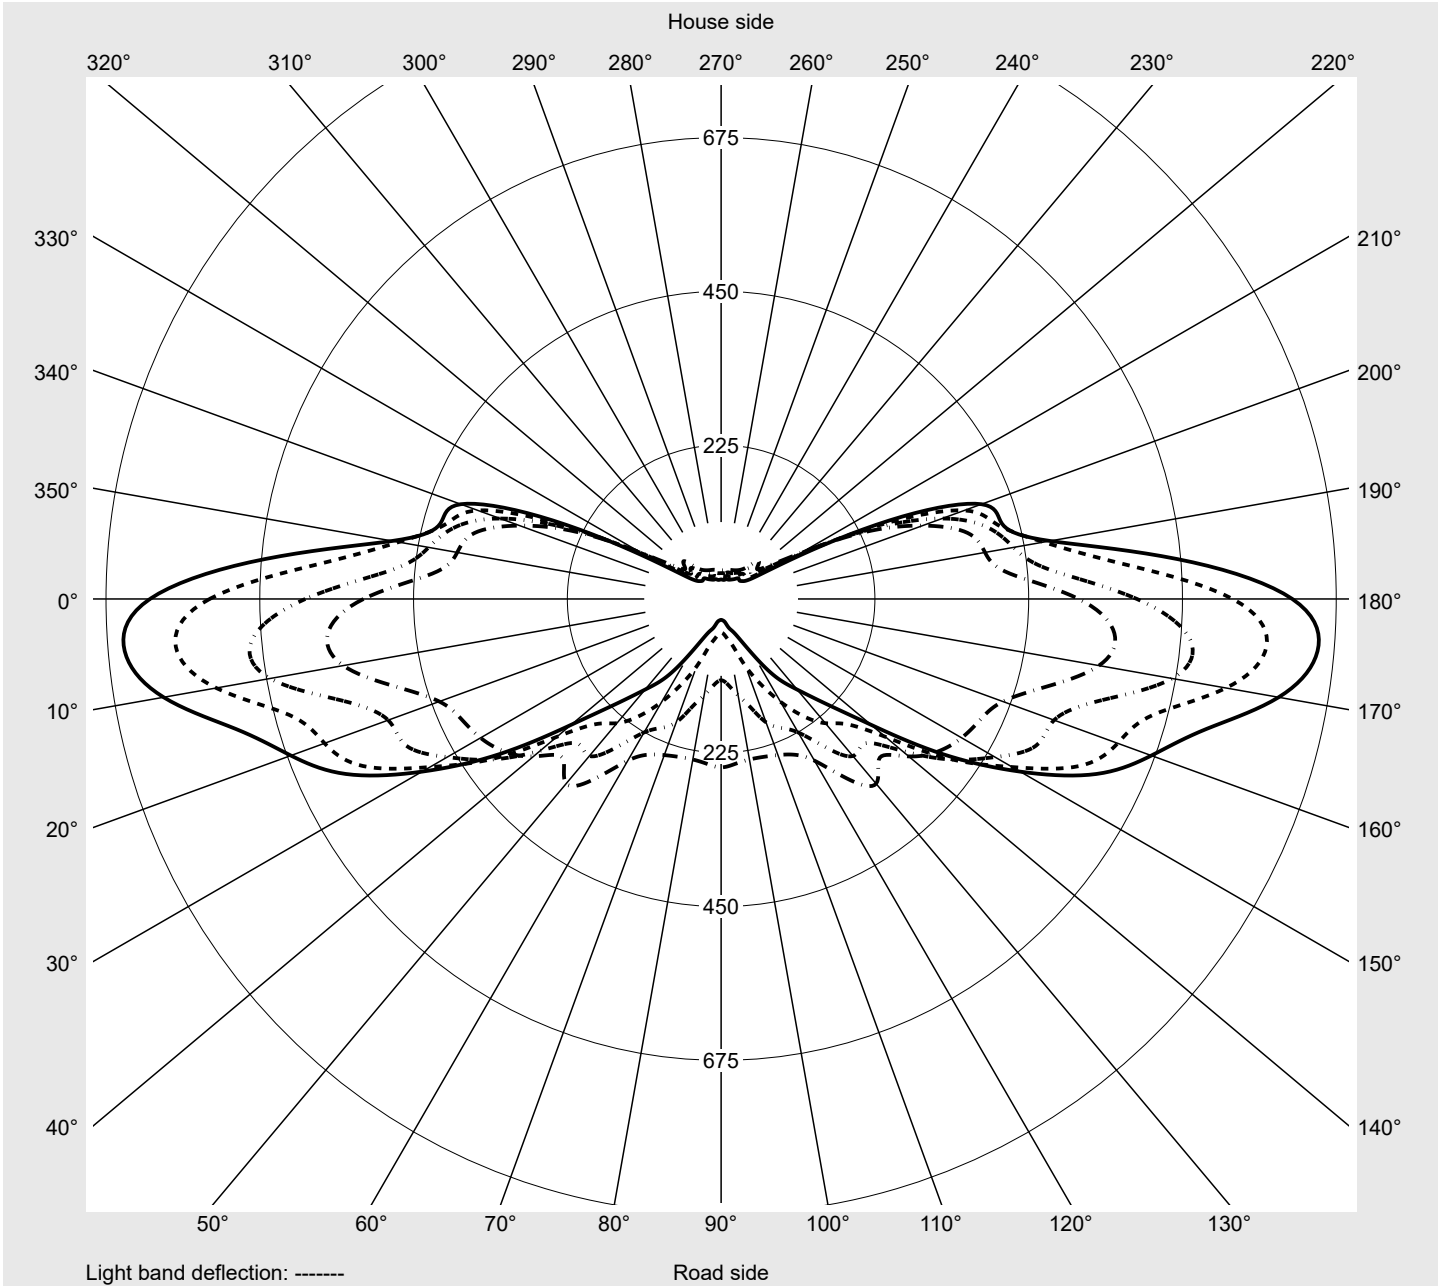

## Photometric test report

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> 59580_92
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	137.6	137.8	138.1	138.4	138.7	138.9	139.1	139.2	139.4	139.6	139.8	140.0	140.2
5,0°	138.5	139.2	139.6	140.3	140.5	140.9	141.1	141.2	141.4	141.4	141.4	141.3	141.2
7,5°	140.5	141.3	142.0	142.6	143.1	143.3	143.5	143.3	143.1	142.9	142.6	142.4	142.2
10,0°	143.0	144.0	144.7	145.4	145.8	145.8	145.8	145.5	145.2	145.0	145.0	144.8	144.8
12,5°	145.8	146.9	147.9	148.9	149.3	149.4	149.3	149.0	148.9	149.1	149.1	149.3	149.3
15,0°	148.1	149.7	151.3	152.6	153.4	153.6	153.4	153.2	153.5	153.9	154.4	154.3	153.8
17,5°	151.7	153.6	155.7	157.5	158.7	158.8	158.8	159.1	159.4	159.8	159.7	159.2	158.2
20,0°	155.1	158.1	161.0	163.3	164.2	164.1	164.6	165.3	165.7	165.4	164.5	163.2	161.8
22,5°	158.8	161.7	165.4	168.6	169.9	170.3	170.6	171.2	171.3	170.6	169.1	167.3	166.1
25,0°	159.7	162.7	166.1	169.6	172.1	174.1	175.7	176.2	175.6	174.6	173.5	172.8	171.9
27,5°	160.5	163.1	166.1	169.3	172.0	175.1	178.4	179.6	178.9	178.4	178.4	178.1	176.9
30,0°	162.9	166.0	168.1	170.2	171.6	174.4	178.2	181.1	182.4	182.5	182.5	182.3	182.5
32,5°	168.9	172.1	174.5	175.7	174.6	174.4	176.5	180.0	185.2	187.4	187.6	188.9	191.5
35,0°	174.4	178.4	182.5	184.8	182.5	180.4	176.7	177.9	185.6	194.2	194.3	195.4	199.0
37,5°	180.6	184.7	188.1	190.0	189.4	187.5	184.0	179.4	184.8	195.6	197.1	198.4	207.5
40,0°	188.3	193.0	196.0	196.4	195.8	194.5	193.8	189.1	183.5	191.7	198.6	205.7	221.9
42,5°	199.5	201.6	203.3	202.7	200.8	199.7	201.6	201.1	191.3	187.7	204.5	218.7	240.8
45,0°	212.8	213.5	214.0	210.6	206.9	204.9	205.5	210.8	207.3	188.5	215.7	238.2	261.1
47,5°	234.8	228.3	226.8	222.0	215.4	211.2	210.0	219.7	224.9	198.8	232.6	260.4	279.8
50,0°	261.5	249.9	243.2	238.9	228.9	221.6	220.2	228.8	245.1	220.2	254.2	283.6	303.5
52,5°	297.7	280.2	266.1	259.2	247.5	239.7	238.5	246.0	265.8	247.9	282.3	316.4	335.3
55,0°	337.4	322.0	301.1	288.9	277.4	268.8	266.3	269.5	288.8	278.7	319.2	344.1	347.3
57,5°	385.1	381.6	359.0	337.9	321.9	309.6	301.3	298.3	309.3	319.9	348.2	353.7	371.5
60,0°	440.3	466.2	448.4	408.8	375.5	357.0	344.2	340.3	341.9	339.0	355.2	362.7	338.2
62,5°	523.2	577.6	561.4	494.1	438.7	418.3	406.4	388.4	358.4	328.4	352.8	320.5	273.2
65,0°	608.4	689.1	670.0	574.3	518.4	508.2	462.7	409.5	345.5	298.5	299.9	263.6	225.5
67,5°	748.5	800.9	750.1	654.7	617.4	578.3	491.9	407.7	313.8	258.9	237.3	209.1	173.7
70,0°	835.7	876.0	828.3	735.0	669.9	605.9	505.2	395.6	286.5	216.9	173.1	138.8	95.3
72,5°	767.9	847.4	834.6	753.0	675.5	624.1	476.4	338.3	269.5	155.5	103.4	68.3	45.4
75,0°	601.3	627.5	623.8	596.1	588.3	536.2	347.0	224.8	141.1	94.6	57.6	37.7	31.5
77,5°	377.2	369.4	340.9	324.6	382.3	290.7	181.7	68.8	46.5	55.4	30.3	22.6	19.4
80,0°	162.9	136.5	129.6	138.8	127.6	130.2	48.4	27.0	26.4	29.1	16.9	12.4	11.1
82,5°	43.8	36.6	34.8	35.5	31.5	36.1	19.4	15.8	10.2	11.2	8.3	6.4	6.1
85,0°	4.0	3.8	4.0	5.1	5.8	5.1	4.0	3.4	3.4	3.3	3.4	2.9	2.4
87,5°	1.6	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.1	1.0	1.0	0.9	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 31 midi toolless</b>	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> <b>59580_92</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	140.3	140.4	140.6	140.7	140.6	140.7	137.3	136.8	136.5	136.2	136.0	135.7	135.4
5,0°	141.1	141.1	141.1	141.0	141.0	140.9	137.8	137.0	136.4	135.7	135.0	134.3	133.8
7,5°	142.0	142.0	142.0	141.9	141.9	141.9	139.4	138.3	137.3	136.3	135.2	134.2	133.3
10,0°	144.7	144.6	144.5	144.5	144.5	144.5	141.8	140.4	139.1	137.7	136.2	134.7	133.2
12,5°	149.0	148.6	148.1	147.8	147.6	147.5	144.3	142.7	141.1	139.3	137.4	135.6	134.0
15,0°	153.2	152.3	151.4	150.5	149.8	149.5	146.4	144.4	142.4	140.2	138.1	136.0	133.8
17,5°	157.0	155.4	153.9	152.4	151.3	151.0	149.2	146.7	143.9	141.2	138.5	135.7	132.9
20,0°	160.4	158.8	156.9	154.9	153.7	153.4	152.3	149.1	145.6	142.2	138.6	135.3	132.1
22,5°	165.5	164.5	162.2	159.4	157.3	156.6	155.1	151.1	147.4	143.6	139.6	135.8	131.5
25,0°	170.8	168.7	166.0	162.7	159.8	158.7	156.2	152.3	148.5	144.4	140.4	136.2	130.8
27,5°	176.0	174.0	171.6	168.7	166.2	165.0	156.9	153.1	149.2	145.0	140.9	135.8	128.2
30,0°	184.5	184.6	183.8	180.6	177.2	175.4	159.5	155.3	150.8	146.5	141.8	134.9	123.5
32,5°	195.4	197.6	198.7	194.5	188.1	184.6	164.6	159.9	154.5	149.5	143.2	133.0	116.6
35,0°	205.3	212.3	214.6	208.3	197.4	192.2	170.0	164.9	159.2	153.4	144.3	128.6	108.6
37,5°	220.1	229.7	229.4	219.5	203.8	196.1	176.3	170.3	164.6	157.3	143.9	122.6	101.1
40,0°	239.9	248.1	246.3	233.7	211.7	199.9	185.0	179.2	172.3	162.5	142.6	115.1	94.4
42,5°	259.0	266.7	261.1	245.8	218.9	204.2	197.3	191.9	183.9	169.6	139.8	107.7	88.8
45,0°	276.7	281.0	272.9	255.5	228.0	209.9	214.7	210.8	199.3	178.4	137.7	99.9	85.4
47,5°	294.0	298.2	291.4	276.4	250.6	234.4	237.9	233.7	216.5	188.6	139.4	93.3	84.2
50,0°	322.1	330.4	318.6	300.5	266.7	251.3	267.9	259.4	235.1	201.0	143.1	91.2	85.4
52,5°	348.5	350.6	342.2	322.0	287.4	267.8	300.3	283.5	253.9	216.6	153.4	94.5	87.8
55,0°	363.6	368.7	344.6	319.7	295.6	274.8	330.8	304.6	274.6	235.8	169.5	102.0	89.2
57,5°	371.4	338.9	325.0	316.3	309.8	299.1	357.3	325.2	301.8	259.9	193.8	115.5	89.8
60,0°	311.8	300.4	292.0	295.6	316.6	332.1	383.9	349.6	330.6	283.7	214.3	128.4	88.8
62,5°	251.4	243.1	239.2	238.5	242.0	246.4	424.5	392.1	373.3	313.8	231.2	134.7	84.5
65,0°	208.3	192.0	163.2	143.3	126.9	119.0	484.3	434.6	404.0	344.1	241.6	131.4	74.2
67,5°	138.1	105.2	74.8	60.9	52.4	49.2	589.7	479.2	419.0	378.8	255.5	121.3	59.0
70,0°	65.5	51.0	43.8	35.2	31.7	30.6	669.9	488.6	425.5	405.3	271.8	102.8	48.7
72,5°	37.7	35.0	33.9	26.0	23.8	23.5	643.4	428.4	419.5	405.8	255.3	81.7	43.6
75,0°	27.9	25.6	24.4	19.8	17.9	17.5	513.0	241.7	319.6	334.9	189.4	58.8	35.0
77,5°	18.2	17.0	15.9	14.2	12.4	12.4	350.6	78.7	160.1	216.5	109.0	42.1	26.4
80,0°	11.5	10.3	9.6	8.1	7.6	7.5	145.4	68.9	132.5	123.3	59.1	28.9	17.3
82,5°	5.9	5.1	4.8	4.2	3.9	4.0	45.8	92.4	98.2	54.2	31.1	19.5	11.7
85,0°	2.2	2.0	1.8	1.6	1.6	1.5	3.8	6.6	9.0	5.6	8.5	7.6	5.3
87,5°	0.8	0.6	0.5	0.5	0.5	0.5	1.7	1.8	1.8	1.8	1.8	1.7	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> 59580_92
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	0.2	0.2
2,5°	135.3	135.0	134.9	134.9	134.7	134.7	134.9	134.9	135.0	135.1	135.1	1.6	1.9
5,0°	133.2	132.7	132.4	132.1	131.9	131.7	131.8	131.7	131.8	131.8	131.8	3.3	5.1
7,5°	132.4	131.5	130.8	130.0	129.4	129.1	128.9	128.9	128.8	128.8	128.9	4.9	10.1
10,0°	131.9	130.7	129.6	128.6	127.8	126.9	126.4	126.0	125.8	125.8	125.6	6.6	16.6
12,5°	132.1	130.2	128.2	126.5	125.0	123.7	122.6	121.8	121.3	121.2	121.1	8.3	24.9
15,0°	131.3	129.1	126.7	124.4	122.2	120.3	118.7	117.3	116.5	116.0	115.9	10.0	34.9
17,5°	130.2	127.4	124.7	121.4	117.9	114.7	111.9	109.7	108.3	107.5	107.3	11.7	46.7
20,0°	128.7	125.0	120.6	115.6	110.7	106.5	103.3	100.9	99.4	98.7	98.5	13.4	60.0
22,5°	126.5	120.4	113.3	106.9	101.5	97.5	94.6	93.0	92.2	92.0	91.9	15.0	75.0
25,0°	122.9	113.4	104.7	97.9	93.4	91.1	90.1	90.1	90.3	90.8	91.0	16.6	91.7
27,5°	116.8	105.0	96.2	91.1	89.0	88.7	89.2	89.9	90.7	91.3	91.4	18.3	110.0
30,0°	108.8	97.0	90.0	87.8	87.6	87.9	89.0	90.3	91.2	92.0	92.2	20.0	130.0
32,5°	101.0	90.7	87.2	87.1	86.9	87.4	88.7	90.5	91.8	92.7	92.7	22.0	152.0
35,0°	93.8	87.1	86.7	86.6	86.4	87.1	88.8	90.7	92.3	92.8	92.7	24.1	176.0
37,5°	89.0	86.6	86.7	86.0	85.9	86.8	88.2	89.9	91.1	91.2	90.8	26.1	202.1
40,0°	86.3	86.8	85.9	85.4	85.7	86.0	86.4	86.9	87.0	86.2	85.5	28.3	230.5
42,5°	86.3	86.6	85.4	85.2	84.9	84.4	83.0	81.7	80.6	79.4	78.7	30.7	261.1
45,0°	86.9	86.1	84.8	83.6	82.2	80.6	78.7	76.5	74.5	72.5	71.7	33.3	294.4
47,5°	88.0	86.7	83.6	80.8	78.1	76.1	74.1	71.8	69.7	67.7	66.9	36.5	330.9
50,0°	90.6	89.1	81.1	76.3	73.1	71.2	69.0	67.0	65.3	63.7	63.1	40.4	371.3
52,5°	92.5	90.6	77.8	71.4	68.2	66.2	64.1	62.3	60.9	59.7	59.1	44.9	416.2
55,0°	91.0	89.5	75.1	67.0	63.6	61.4	59.1	57.8	56.7	55.7	55.6	49.6	465.8
57,5°	87.1	90.3	71.6	62.0	58.0	56.1	54.5	53.4	52.6	51.2	51.1	54.7	520.5
60,0°	79.8	88.3	67.6	57.7	53.6	51.4	49.9	49.0	48.1	46.8	46.6	59.3	579.8
62,5°	68.5	77.9	63.2	52.8	48.6	46.4	45.1	44.2	43.2	42.2	41.9	62.7	642.5
65,0°	57.6	63.2	56.5	47.7	44.1	41.7	40.4	40.3	38.7	37.8	37.8	64.7	707.2
67,5°	48.5	48.6	48.1	41.8	38.5	36.5	35.2	35.0	33.6	33.4	33.2	66.2	773.4
70,0°	40.7	38.1	39.3	35.9	33.1	31.1	30.1	30.0	28.5	28.1	28.5	67.0	840.4
72,5°	34.1	30.9	31.6	30.4	28.1	26.2	25.0	24.7	23.5	22.9	22.9	63.1	903.6
75,0°	28.3	25.1	25.1	24.8	23.1	21.3	20.1	19.5	18.5	17.9	18.2	48.2	951.8
77,5°	22.0	19.5	18.9	19.3	17.9	16.5	15.2	14.3	13.9	13.4	13.5	27.9	979.7
80,0°	15.2	13.6	13.0	13.6	12.6	11.5	10.6	9.9	9.4	9.2	9.2	13.1	992.8
82,5°	10.2	9.1	8.0	8.7	8.1	7.4	6.8	6.2	5.7	5.6	5.7	5.7	998.5
85,0°	5.1	4.8	4.6	4.6	4.6	4.0	3.6	3.3	3.0	3.1	3.1	1.1	999.6
87,5°	1.6	1.6	1.6	1.4	1.4	1.5	1.5	1.4	1.3	1.4	1.2	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> 59580_92
---	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18750	142.8	158.8	150.8
95	237	251	17801	132.6	147.2	139.9
90	221	249	16866	123.0	136.5	129.8
85	206	246	15957	114.2	126.6	120.4
80	191	244	15011	105.6	116.9	111.2
75	176	241	14033	96.9	107.3	102.1
70	162	238	13092	89.0	98.4	93.7
65	149	234	12194	81.7	90.3	86.0
60	136	231	11272	74.4	82.1	78.2
55	123	227	10322	67.1	74.2	70.6
50	110	223	9346	60.0	66.2	63.1
45	98	219	8422	53.4	59.0	56.2
40	86	214	7477	46.8	51.7	49.2
35	75	209	6592	40.9	45.0	43.0
30	63	203	5604	34.5	37.8	36.2
25	52	196	4681	28.7	31.5	30.1
20	41	187	3739	23.0	25.1	24.0
15	30	176	2779	17.4	18.9	18.2
11	21	163	1981	12.8	13.9	13.4

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19370	144.4	160.5	152.4
95	238	252	18411	134.7	149.5	142.1
90	222	249	17418	125.1	138.7	131.9
85	207	247	16457	116.2	128.8	122.5
80	192	244	15464	107.5	118.9	113.2
75	178	241	14510	99.3	109.9	104.6
70	164	238	13533	91.3	100.9	96.1
65	151	235	12601	83.9	92.6	88.2
60	138	232	11647	76.5	84.5	80.5
55	125	228	10671	69.2	76.3	72.8
50	112	224	9670	61.9	68.3	65.1
45	100	220	8725	55.3	60.9	58.1
40	88	215	7761	48.6	53.6	51.1
35	76	210	6773	42.0	46.3	44.2
30	65	204	5852	36.1	39.6	37.8
25	53	197	4830	29.7	32.5	31.1
20	42	188	3873	23.9	26.1	25.0
15	31	177	2901	18.2	19.8	19.0
10	21	163	2004	13.0	14.1	13.6

## Photometric test report

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> <b>59580_92</b>
---	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	19090	143.6	159.6	151.6
95	238	252	18162	133.9	148.7	141.3
90	222	249	17198	124.3	137.9	131.1
85	206	246	16197	114.9	127.4	121.2
80	192	244	15292	106.8	118.2	112.5
75	177	241	14290	98.1	108.5	103.3
70	163	238	13329	90.1	99.6	94.8
65	150	235	12413	82.8	91.4	87.1
60	137	231	11473	75.4	83.3	79.4
55	124	228	10509	68.2	75.2	71.7
50	111	224	9519	61.0	67.3	64.2
45	99	219	8584	54.3	59.9	57.1
40	87	215	7627	47.7	52.7	50.2
35	75	209	6649	41.1	45.3	43.2
30	64	204	5734	35.2	38.7	37.0
25	53	197	4804	29.4	32.2	30.8
20	42	188	3854	23.7	25.9	24.8
15	31	177	2888	18.1	19.7	18.9
10	21	163	1995	12.9	14.0	13.4

**Photometric test report**

<b>Family</b> Streetlight 31 midi toolless	<b>Order number: 5XH7A31T08MA</b> <b>EAN: 4069025098184</b>	<b>LP number</b> <b>59580_92</b>
---	--	-------------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	18750.0	142.8
5.0	19370.0	144.4
15.0	19090.0	143.6