

Order No.: 5TR102C0Q | **GTIN (EAN):** 4069025022677


Product description: Mod, trunk.rail, 10SUa2SU, L2990, 12x2.5², wh



Modario®, trunking rail, of sheet steel, coated, pure white, 10x system unit 299mm 10-core and 2x system unit 1495mm 2-core, length: 2.990 mm, width: 58 mm, height: 43mm, through-wiring: 12x 2.5mm², with terminal, 10+2-pole, max. 2.5mm², protection rating (complete): for IP20 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 4.5
 GTIN (EAN): 4069025022677

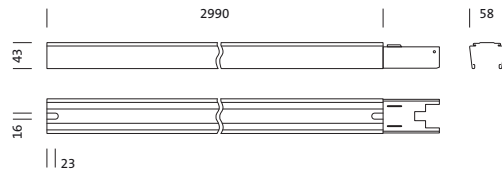

Order No.: 5TR102C0Q | GTIN (EAN): 4069025022677

Detailed technical description: Mod,trunk.rail,10SUa2SU,L2990,12x2.5²,wh



Key data

- Product type: trunking components group (TS)
- Product name: Modario®
- Order No.: 5TR102C0Q

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: for electrical and mechanical plug and socket connection of rail elements

Certificates, Standards

- Protection rating: for IP20 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

Material, Colour

- trunking rail: sheet steel, coated, pure white, 10x system unit 299mm 10-core and 2x system unit 1495mm 2-core
- Colour specification: pure white

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: terminal, 10+2-pole, max. 2.5mm²
- Through-wiring: 12x 2.5mm²

Dimensions, Weight

- Length: 2990mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 4.5kg

Order No.: 5TR102C0Q | GTIN (EAN): 4069025022677

Dimensions: Mod,trunk.rail,10SUa2SU,L2990,12x2.5²,wh

