

Order No.: 5LZ904712 | GTIN (EAN): 4008321710871


**Product description:** SCon21O,controller,wired



SITECO Connect 21-Ocontroller, master, central control, dimmable, installation type: recessed, installation location: in an electrical distributor, of plastic, part units: 9 part units, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 100..240V, voltage type: AC, 1 x network connector Ethernet, 4 x DALI, 4 x relay contact, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.4  
GTIN (EAN): 4008321710871

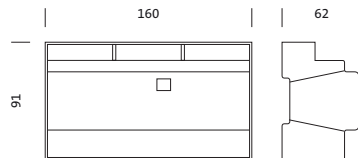

Order No.: 5LZ904712 | GTIN (EAN): 4008321710871

Detailed technical description: SCon21O,controller,wired



#### Key data

- System family: SITECO Connect 21 O
- Product type: control unit
- Product name: SITECO Connect 21-O
- Order No.: 5LZ904712

#### 4x relay contact

- Connection: screw terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Feature: changeover relay 5A, programmable via DALI

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Operating device:

- Control: DALI, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

#### Material, Colour

- housing: plastic, grey, 9 part units
- Colour specification: grey

#### Mounting

- Mounting method, mounting location: recessed, in an electrical distributor
- Supplement: only suitable for indoor use

#### Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 100..240V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 90mm
- Width: 160mm
- Height: 62mm
- Weight: 0.4kg


#### Outputs

#### 4x DALI

- Connection: plug-in terminal, 2-pole, max. 2.5mm<sup>2</sup>
- Limiting: max. 64x ECG DALI
- System current: DALI current 250mA per DALI line
- Cable length: max. 300m

Order No.: 5LZ904712 | GTIN (EAN): 4008321710871

Dimensions: SCon21O,controller,wired

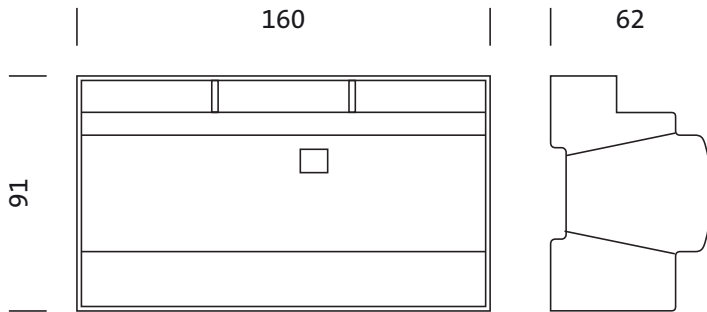

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.08.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -