

## Photometric test report

Family  
**Floodlight 20 mini LED**

Order number: **5XA7672B1D3AC**  
EAN: **4058352220917**

LP number  
**58553\_6**



**Version** design bracket  
**Optic** asymmetric distribution PL52  
**Cover** toughened safety glass  
**Lamps** 1 x LED 3000K / CRI ≥ 80  
(unbekannt LED 3000K / CRI = 80)  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 4930 lm  
Power consumption = 51.0 W  
Luminous efficacy = 96.7 lm/W

serial  
documentation  
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: **827 cd/klm**

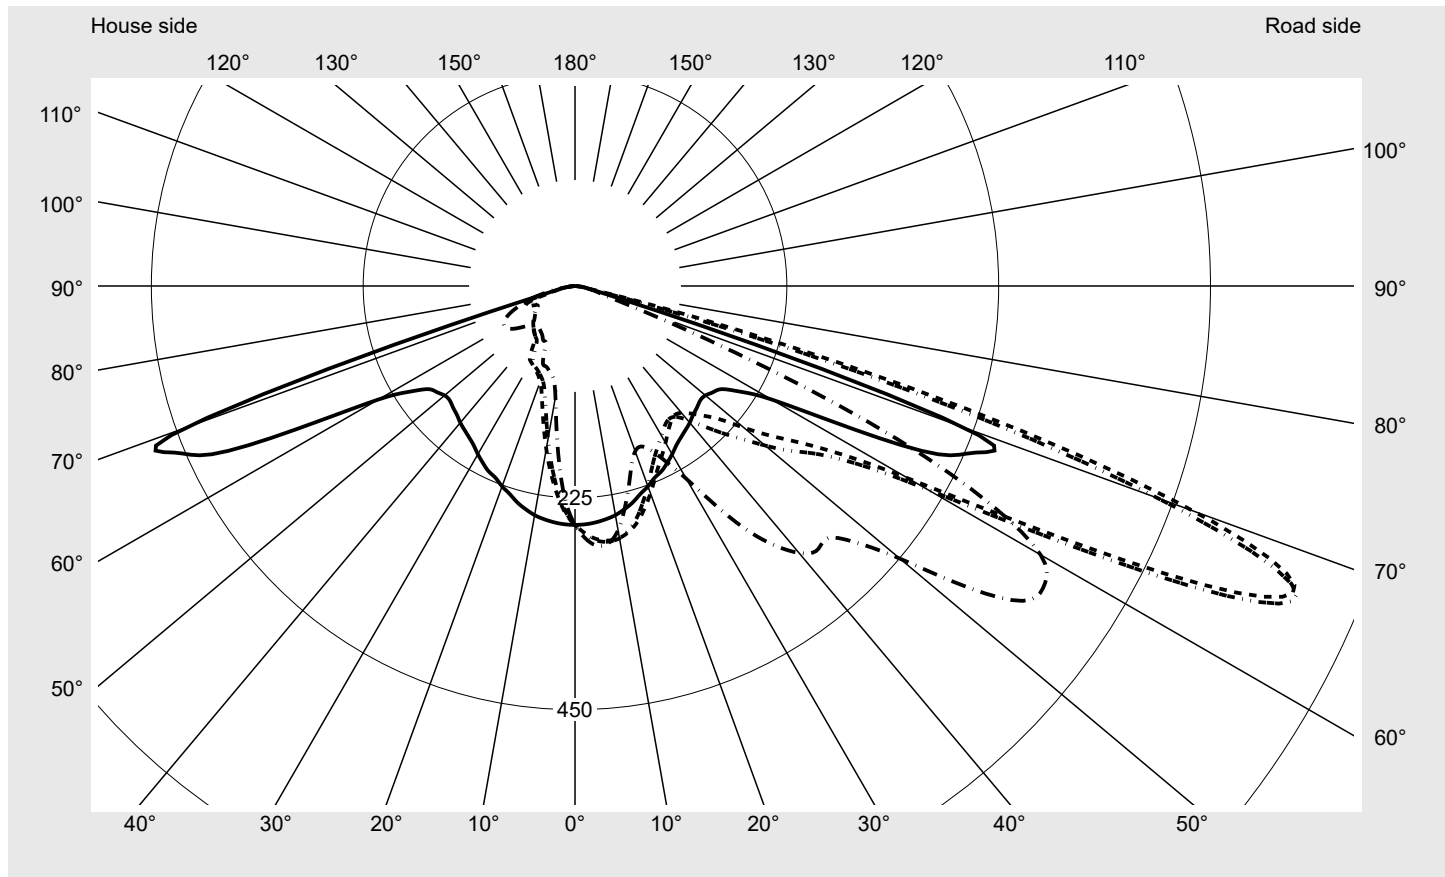

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

### Measurement conditions


DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1D3AC</b> <b>EAN: 4058352220917</b>	<b>LP number</b> <b>58553_6</b>
--	---	------------------------------------



**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**

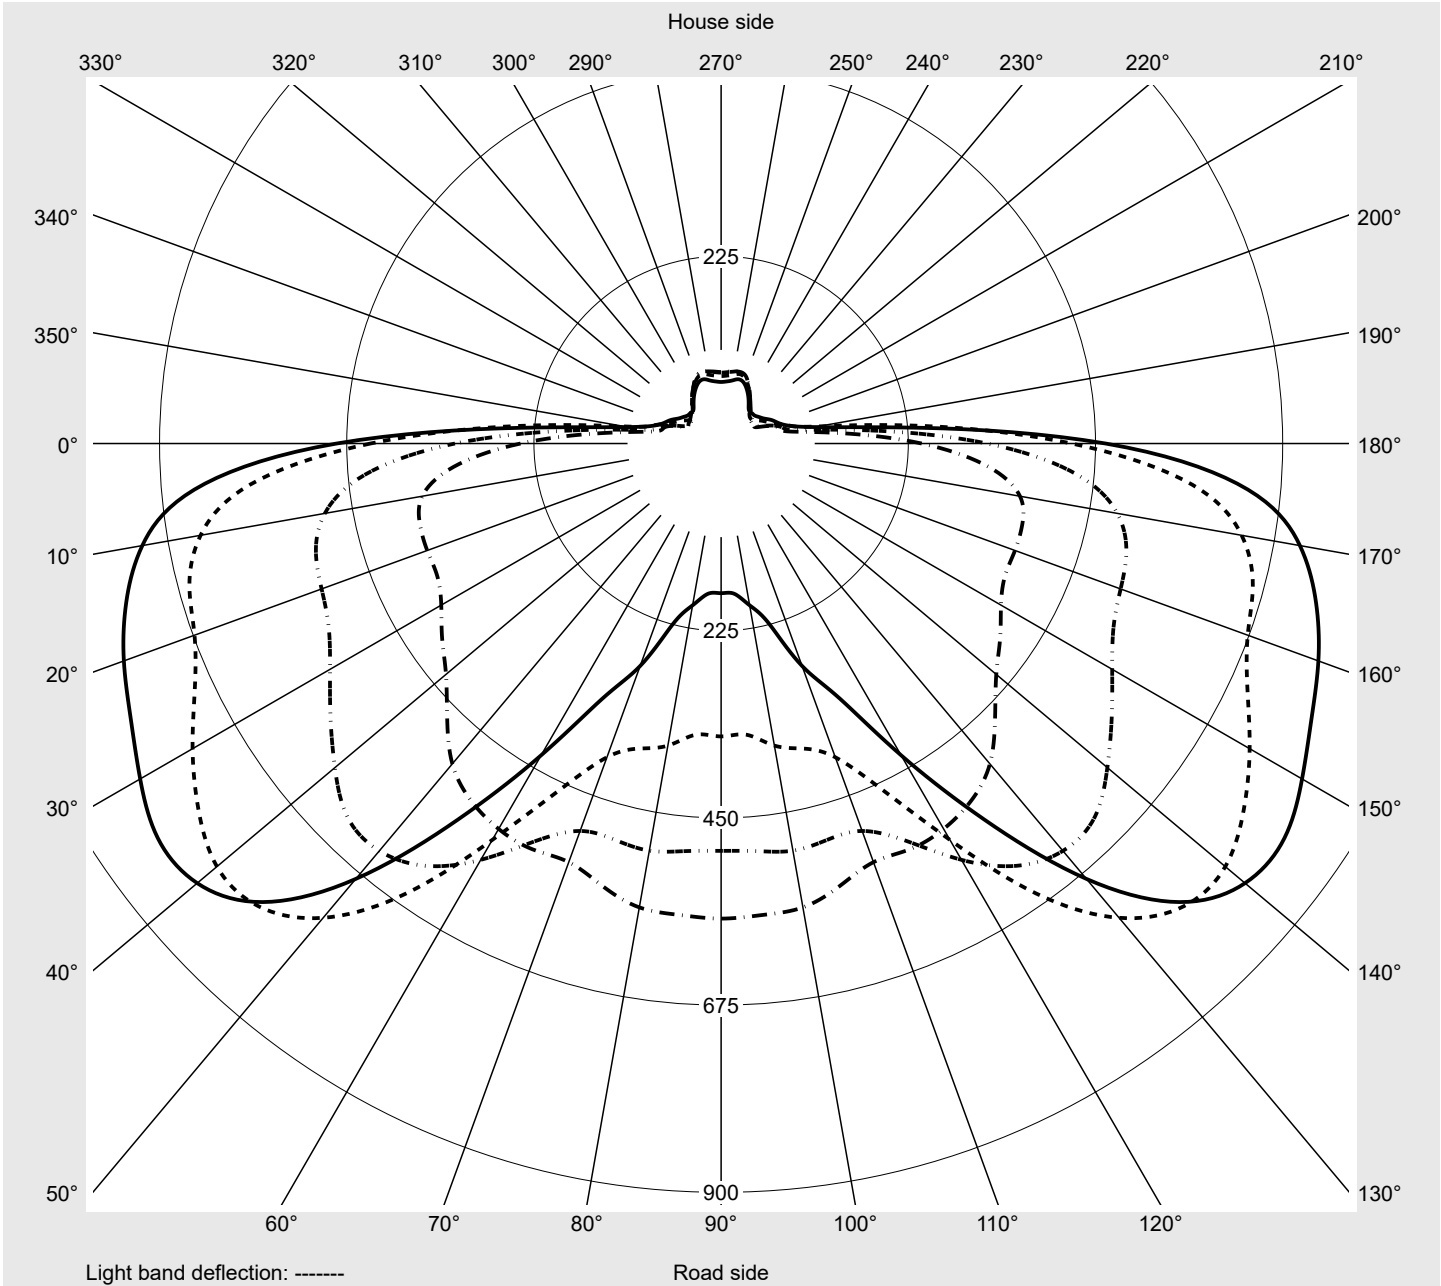

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1D3AC</b> <b>EAN: 4058352220917</b>	<b>LP number</b> <b>58553_6</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	253.4	254.9	256.4	258.0	259.5	261.1	262.4	263.4	264.5	265.4	266.3	266.9	267.4
5,0°	252.0	255.2	258.3	261.1	263.7	266.3	268.4	270.1	271.6	272.8	273.7	274.6	275.2
7,5°	249.9	254.7	259.0	262.7	265.9	268.8	271.0	272.7	273.9	274.6	275.1	275.5	275.5
10,0°	247.1	253.2	258.3	262.6	266.1	268.7	270.7	271.8	272.0	271.6	270.6	269.4	267.8
12,5°	242.8	250.3	256.3	260.8	264.0	266.2	267.2	266.9	265.2	262.4	259.1	255.6	252.1
15,0°	237.8	246.4	253.0	257.5	260.3	261.5	261.0	258.6	254.4	249.3	243.9	238.7	233.5
17,5°	231.4	241.9	248.9	253.2	255.1	254.7	251.9	246.8	240.3	233.3	226.3	219.9	214.0
20,0°	226.5	237.3	244.7	248.7	249.4	247.0	241.7	234.4	226.2	217.9	210.2	203.6	198.3
22,5°	220.6	233.3	240.9	244.1	243.3	238.5	230.9	221.6	211.9	203.1	195.7	190.4	186.7
25,0°	217.2	230.8	238.8	241.4	238.8	231.5	221.3	210.4	200.2	191.7	186.1	183.2	182.9
27,5°	211.9	228.0	237.0	239.2	235.0	225.4	213.2	201.1	191.1	184.3	181.2	182.4	186.4
30,0°	206.3	222.9	232.5	234.4	229.0	218.0	204.9	192.3	183.6	179.2	180.9	187.1	195.9
32,5°	200.5	218.7	228.7	229.0	221.2	208.7	195.3	183.8	176.9	177.0	184.1	197.2	213.7
35,0°	196.2	216.1	227.0	225.9	216.5	202.5	188.2	177.1	173.1	178.5	193.9	217.2	243.3
37,5°	192.8	214.5	225.3	223.2	212.3	197.3	182.7	173.2	175.3	188.7	214.0	245.7	277.7
40,0°	189.6	213.1	223.4	221.9	210.0	194.2	180.3	175.9	185.7	207.5	240.4	277.4	310.3
42,5°	185.7	211.7	222.8	221.5	208.9	192.7	181.7	184.0	201.8	231.7	270.0	304.6	334.6
45,0°	183.0	210.3	223.6	222.1	209.1	193.9	187.2	195.2	220.8	254.0	286.5	314.9	338.2
47,5°	180.3	212.5	227.7	225.4	212.0	199.0	194.8	210.1	240.6	271.7	299.3	321.7	340.0
50,0°	180.9	217.4	236.4	236.0	222.7	210.3	212.6	234.2	263.6	291.2	311.5	327.9	344.0
52,5°	185.1	227.1	248.8	248.6	237.5	229.9	238.2	261.0	287.4	309.3	325.3	338.1	360.6
55,0°	191.0	242.1	268.8	270.6	261.4	258.5	268.5	289.3	310.3	327.0	343.8	368.9	407.8
57,5°	209.2	271.8	303.8	307.5	302.1	301.4	312.0	330.2	348.5	367.0	400.1	440.6	473.6
60,0°	241.1	322.9	364.8	374.8	375.9	376.5	388.5	409.3	431.7	465.7	502.6	524.1	534.9
62,5°	320.0	429.7	483.6	504.3	511.0	520.5	542.8	573.2	606.0	635.1	639.1	619.6	577.8
65,0°	421.5	568.6	635.3	661.7	673.6	698.0	733.6	767.0	791.1	786.5	744.2	660.3	550.1
67,5°	462.2	635.6	706.4	740.4	764.0	783.0	806.3	826.7	822.1	779.5	683.1	552.0	432.7
70,0°	439.4	623.7	722.7	767.0	750.7	724.1	713.8	699.9	659.8	581.1	469.0	370.0	297.7
72,5°	145.9	232.6	294.5	375.4	459.3	476.0	466.3	444.0	388.2	309.7	247.5	213.0	182.8
75,0°	37.2	40.5	45.0	53.0	97.4	158.1	175.4	167.3	114.0	78.9	104.0	105.0	101.6
77,5°	20.7	22.2	22.7	23.3	27.5	36.2	40.8	28.4	24.8	24.4	34.4	39.0	40.2
80,0°	12.0	11.3	11.0	11.2	12.5	15.0	15.0	13.6	13.3	14.0	15.0	15.3	17.0
82,5°	6.5	6.1	6.1	6.4	6.7	7.4	8.2	7.9	8.1	8.3	8.4	8.3	9.7
85,0°	2.9	2.6	2.6	2.7	2.9	3.3	3.5	3.6	3.7	3.7	3.7	3.5	3.4
87,5°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1D3AC</b> <b>EAN: 4058352220917</b>	<b>LP number</b> <b>58553_6</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	267.8	268.1	268.4	268.7	269.0	269.1	251.7	249.8	248.0	246.2	244.3	242.6	240.9
5,0°	275.6	275.9	276.3	276.7	277.0	277.2	248.2	244.0	239.6	235.0	230.4	225.8	221.2
7,5°	275.3	275.0	274.9	275.0	275.2	275.3	244.1	237.5	230.3	222.6	214.9	207.0	199.0
10,0°	266.2	264.6	263.6	263.3	263.3	263.4	239.2	230.0	219.9	209.1	197.8	186.7	175.8
12,5°	248.8	245.9	244.1	243.2	242.9	242.8	233.0	221.3	208.1	194.3	180.0	166.3	153.4
15,0°	229.0	225.2	222.6	221.2	220.6	220.5	225.8	211.4	195.4	178.7	162.2	147.1	133.8
17,5°	208.9	204.9	202.1	200.5	199.8	199.6	218.1	201.1	182.2	163.2	145.3	130.0	118.1
20,0°	194.2	190.6	188.5	187.4	186.9	186.9	210.5	191.0	169.3	148.6	130.5	116.8	108.2
22,5°	184.6	183.4	183.1	183.6	184.2	184.5	203.2	181.1	157.2	135.5	118.4	107.6	102.4
25,0°	183.9	185.6	187.8	190.6	192.6	193.2	196.4	171.4	145.9	124.0	108.9	101.9	98.7
27,5°	191.2	195.9	201.2	207.0	210.4	211.0	189.8	162.2	135.0	114.2	102.5	98.0	95.9
30,0°	205.1	213.5	222.6	232.7	237.7	236.4	180.8	151.5	124.3	105.4	97.8	94.9	93.3
32,5°	230.0	245.0	259.2	272.2	276.6	274.1	173.5	141.9	114.7	99.0	94.1	92.1	89.3
35,0°	266.1	285.6	303.5	314.0	314.9	314.8	166.4	132.6	105.7	94.0	90.6	87.5	77.7
37,5°	302.9	322.5	336.8	344.3	344.8	346.7	159.8	124.3	99.1	90.5	86.2	78.6	69.8
40,0°	334.1	349.7	360.6	366.5	368.0	370.1	152.8	115.7	93.0	86.9	78.0	69.3	66.7
42,5°	355.7	366.5	373.9	378.8	379.7	380.7	146.0	108.2	88.4	83.7	69.4	64.4	64.2
45,0°	355.2	361.7	368.1	374.9	377.3	378.9	139.2	100.1	84.1	80.3	63.5	61.4	61.9
47,5°	355.8	364.3	376.0	391.6	399.1	402.5	134.3	94.7	80.7	77.3	60.3	58.8	59.5
50,0°	364.3	384.7	407.6	433.1	445.9	450.5	128.9	89.3	77.4	74.2	56.6	56.3	56.6
52,5°	395.5	433.8	469.8	502.4	520.5	526.0	127.0	85.5	75.0	71.2	53.7	53.7	53.9
55,0°	451.6	493.4	531.1	562.3	577.5	583.0	126.6	82.7	72.8	68.1	50.9	50.9	51.5
57,5°	505.1	534.7	563.2	583.5	589.7	591.1	130.5	81.8	71.5	64.9	48.4	48.1	48.7
60,0°	537.9	535.5	550.7	566.1	568.8	571.0	143.7	83.2	71.6	61.8	46.4	45.4	46.3
62,5°	527.1	495.6	493.1	496.9	491.8	489.6	180.3	94.3	75.5	63.3	49.3	45.8	44.7
65,0°	459.5	401.3	379.6	368.7	351.4	352.1	243.0	118.3	84.1	70.3	61.3	55.1	48.7
67,5°	338.8	284.5	225.0	197.5	181.3	179.9	221.0	113.9	83.3	72.8	66.8	59.9	55.6
70,0°	242.2	200.8	99.2	72.0	66.9	70.0	138.6	70.9	68.1	65.0	60.1	57.1	54.6
72,5°	153.6	125.3	46.7	33.4	33.1	33.4	51.7	32.6	30.8	31.9	33.7	38.5	41.9
75,0°	88.5	70.5	31.8	25.1	24.4	24.4	24.5	22.0	22.0	21.9	22.6	24.1	25.8
77,5°	35.9	33.1	21.4	17.3	16.4	16.6	16.0	15.4	16.0	16.0	16.6	17.6	18.8
80,0°	18.9	16.9	12.5	11.1	10.6	10.6	11.8	10.4	10.4	10.7	11.3	11.9	12.5
82,5°	11.3	9.5	6.6	5.8	5.4	5.4	6.5	5.9	6.2	6.6	7.1	7.3	7.5
85,0°	3.2	2.9	2.4	2.2	2.1	2.0	2.7	2.7	3.0	3.3	3.4	3.6	3.6
87,5°	0.8	0.8	0.8	0.8	0.9	0.9	1.1	1.2	1.2	1.2	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1D3AC</b> <b>EAN: 4058352220917</b>	<b>LP number</b> <b>58553_6</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	0.4	0.4
2,5°	239.2	237.4	235.7	234.3	233.0	231.9	230.8	229.9	229.2	228.9	228.8	3.0	3.4
5,0°	216.6	212.2	208.0	204.2	200.8	198.0	195.3	193.3	191.8	191.1	190.8	5.8	9.2
7,5°	191.3	184.0	177.3	171.3	166.0	161.5	157.7	154.8	152.7	151.6	151.2	8.2	17.4
10,0°	165.6	156.3	148.0	140.8	134.8	129.9	126.0	123.1	121.2	120.1	119.8	10.3	27.7
12,5°	141.7	131.9	123.8	117.4	112.5	109.1	106.7	105.1	104.1	103.5	103.2	12.0	39.7
15,0°	123.0	114.7	109.2	105.6	103.1	101.2	99.7	98.5	97.8	97.3	97.2	13.5	53.2
17,5°	110.2	105.7	102.7	100.5	98.6	97.1	95.7	94.7	94.1	93.6	93.4	14.7	67.9
20,0°	103.7	101.0	99.1	97.4	95.9	94.4	93.1	92.2	91.5	91.1	90.8	15.9	83.8
22,5°	99.7	97.8	96.4	95.1	93.8	92.5	91.1	89.6	89.2	89.1	89.1	17.1	100.9
25,0°	96.8	95.4	94.0	93.1	91.4	85.6	79.7	77.9	77.3	76.9	76.6	18.2	119.1
27,5°	94.3	91.9	89.6	84.7	75.7	71.6	70.1	69.0	68.2	67.7	67.4	19.5	138.6
30,0°	88.9	83.4	79.2	72.9	71.1	70.3	69.5	68.7	67.9	67.3	67.0	21.0	159.6
32,5°	78.1	73.8	71.5	70.7	70.3	69.5	68.1	66.7	65.4	64.4	64.0	22.9	182.5
35,0°	70.8	70.1	69.9	69.6	68.3	66.7	65.1	63.9	62.8	62.1	61.7	25.1	207.6
37,5°	68.6	68.4	68.2	66.9	65.5	64.6	63.7	62.7	61.7	60.7	60.2	27.5	235.1
40,0°	66.6	66.6	65.6	64.6	64.0	63.2	62.6	61.9	60.8	59.7	59.0	30.0	265.1
42,5°	64.7	64.2	63.9	63.6	63.2	62.6	62.3	62.0	61.2	59.9	59.0	32.3	297.4
45,0°	62.3	62.5	62.8	62.7	63.0	63.3	63.4	63.0	62.3	61.0	59.9	34.0	331.4
47,5°	60.2	61.2	61.9	62.5	63.8	64.1	64.6	64.7	64.3	63.1	62.2	36.2	367.6
50,0°	57.7	59.3	61.1	62.1	64.0	65.2	66.6	67.6	67.6	66.6	66.0	39.4	407.0
52,5°	55.2	57.1	59.3	61.1	63.9	67.1	70.6	73.2	73.6	72.9	72.2	44.1	451.1
55,0°	52.8	54.9	57.6	60.6	64.8	70.4	76.4	80.6	80.3	79.6	79.1	49.5	500.6
57,5°	50.5	52.7	56.2	60.6	66.5	74.0	82.1	86.7	86.3	85.6	84.1	55.7	556.3
60,0°	48.1	50.9	55.3	61.1	68.7	77.7	86.5	89.1	88.1	86.8	85.9	63.4	619.7
62,5°	46.1	49.1	54.2	61.1	69.2	77.8	85.6	89.4	87.8	86.1	85.2	74.4	694.1
65,0°	46.4	48.2	53.2	60.1	68.5	76.8	83.7	86.3	83.9	82.0	81.1	84.5	778.5
67,5°	52.5	52.0	52.1	57.7	65.3	72.5	78.4	80.0	76.9	74.9	74.0	82.2	860.7
70,0°	54.5	58.5	57.0	53.9	59.7	65.6	69.8	70.5	67.6	65.1	64.4	69.4	930.2
72,5°	52.2	57.1	55.0	50.9	51.3	55.5	58.3	58.3	55.1	53.4	54.1	39.8	969.9
75,0°	28.6	36.9	40.3	39.0	41.6	44.9	46.8	46.1	43.2	41.5	42.5	15.6	985.6
77,5°	20.4	22.6	25.3	28.0	30.9	33.4	34.8	33.4	31.1	29.8	29.9	7.0	992.5
80,0°	13.6	15.1	17.0	19.0	21.0	22.4	23.0	21.8	20.4	19.5	19.3	4.0	996.5
82,5°	8.0	8.7	9.6	10.5	11.0	11.5	11.5	11.1	10.4	10.1	10.0	2.2	998.8
85,0°	3.6	3.8	4.1	4.4	4.7	5.0	5.2	5.0	4.7	4.6	4.5	1.0	999.7
87,5°	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight 20 mini LED	<b>Order number: 5XA7672B1D3AC</b> <b>EAN: 4058352220917</b>	<b>LP number</b> 58553_6
---	---	-----------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4930	51.0
95	239	252	4684	48.1
90	224	250	4437	45.2
85	211	247	4191	42.4
80	197	245	3944	39.8
75	182	242	3698	37.1
70	169	239	3451	34.5
65	157	236	3205	31.7
60	143	233	2958	29.3
55	130	230	2712	26.8
50	117	226	2465	24.4
45	104	222	2219	22.1
40	93	217	1972	19.7
35	81	212	1726	17.4
30	69	206	1479	15.2
25	57	199	1233	13.0
20	45	191	986	10.9
15	34	180	739	8.8