

Photometric test report

Family
Floodlight 20 mini LED

Order number: 5XA7672B2B1AC
EAN: 4058352221013

LP number
58555_2



Version mounting bracket
Optic symmetric distribution RS17
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
 (unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 6810 lm
 Power consumption = 51.0 W
 Luminous efficacy = 133.5 lm/W


serial
documentation
25.08.2021

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 2095 cd/klm

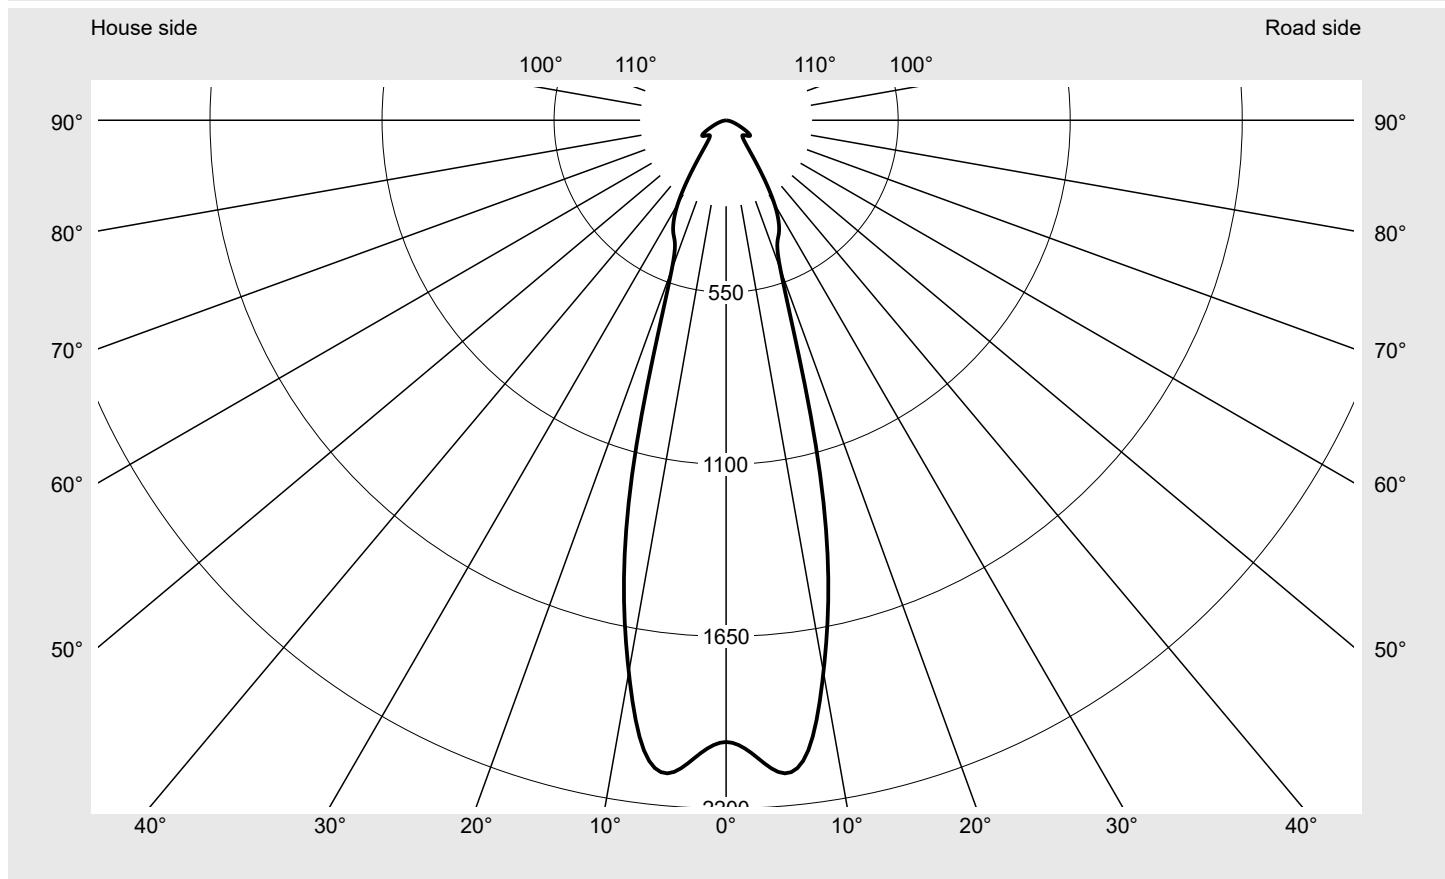

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	33.2
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032


Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2B1AC EAN: 4058352221013	LP number 58555_2
--	---	------------------------------------



Envelope curve in cd/klm

KMK 5°
 KMK 2.5°
 KMK 0°

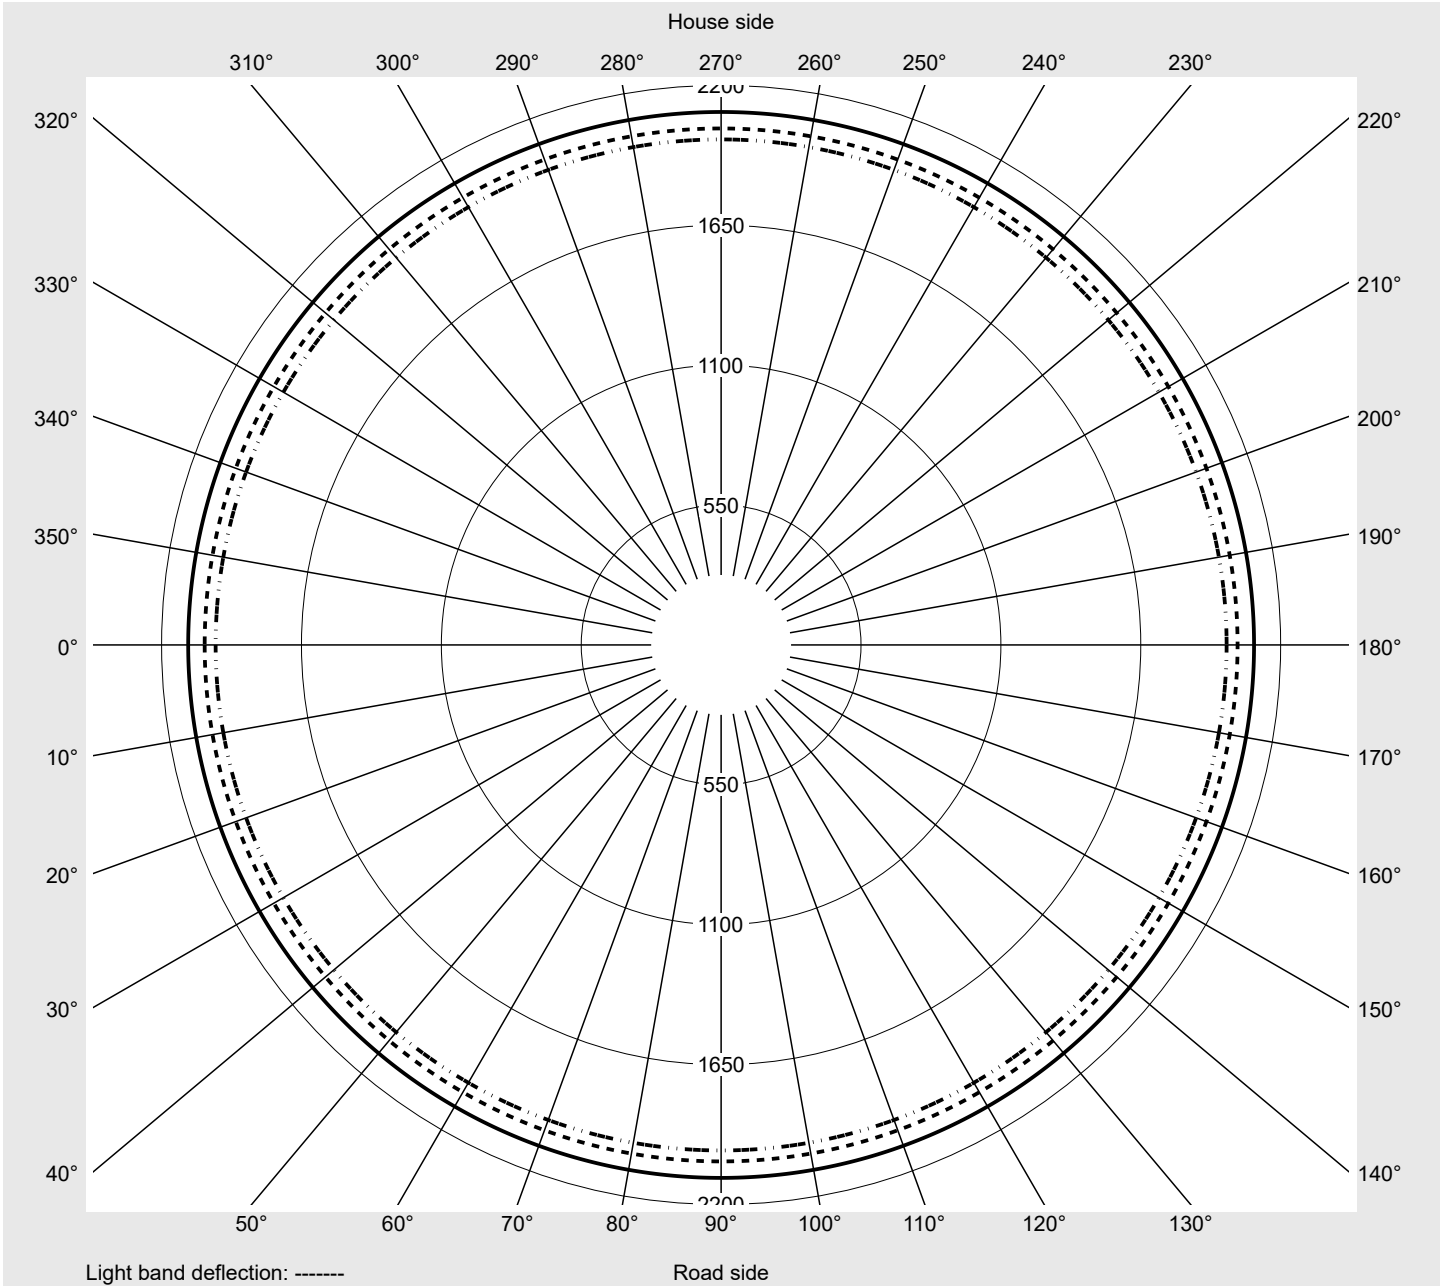

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2B1AC EAN: 4058352221013	LP number 58555_2
---	---	-----------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1987.6	3.0	3.0
2,5°	2030.7	24.3	27.3
5,0°	2095.5	50.1	77.3
7,5°	2026.9	72.5	149.8
10,0°	1791.8	85.3	235.1
12,5°	1509.5	89.6	324.7
15,0°	1149.0	81.5	406.2
17,5°	740.6	61.1	467.3
20,0°	508.4	47.7	514.9
22,5°	427.7	44.9	559.8
25,0°	399.1	46.2	606.1
27,5°	363.0	45.9	652.0
30,0°	308.9	42.3	694.3
32,5°	237.9	35.0	729.4
35,0°	171.0	26.9	756.3
37,5°	124.2	20.7	777.0
40,0°	96.7	17.0	794.0
42,5°	81.3	15.1	809.1
45,0°	73.6	14.3	823.4
47,5°	71.2	14.4	837.8
50,0°	74.3	15.6	853.4
52,5°	79.9	17.4	870.8
55,0°	87.8	19.7	890.5
57,5°	90.8	21.0	911.5
60,0°	83.4	19.8	931.3
62,5°	69.1	16.8	948.1
65,0°	54.1	13.4	961.5
67,5°	42.5	10.8	972.3
70,0°	33.2	8.6	980.9
72,5°	25.3	6.6	987.5
75,0°	18.4	4.9	992.4
77,5°	12.8	3.4	995.8
80,0°	8.4	2.3	998.1
82,5°	4.7	1.3	999.3
85,0°	1.9	0.5	999.8
87,5°	0.4	0.1	1000.0
90,0°	0.0	0.0	1000.0
100,0°	0.0	0.0	1000.0
110,0°	0.0	0.0	1000.0
120,0°	0.0	0.0	1000.0
130,0°	0.0	0.0	1000.0
140,0°	0.0	0.0	1000.0
150,0°	0.0	0.0	1000.0
160,0°	0.0	0.0	1000.0
170,0°	0.0	0.0	1000.0
180,0°	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2B1AC EAN: 4058352221013	LP number 58555_2
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6810	51.0
95	239	252	6470	48.0
90	224	250	6129	45.2
85	211	247	5789	42.4
80	197	245	5448	39.8
75	182	242	5108	37.1
70	169	239	4767	34.5
65	157	236	4427	31.7
60	143	233	4086	29.3
55	130	230	3746	26.8
50	117	226	3405	24.4
45	104	222	3065	22.1
40	93	217	2724	19.7
35	81	212	2384	17.4
30	69	206	2043	15.2
25	57	199	1703	13.0
20	45	191	1362	10.9
15	34	180	1021	8.8