
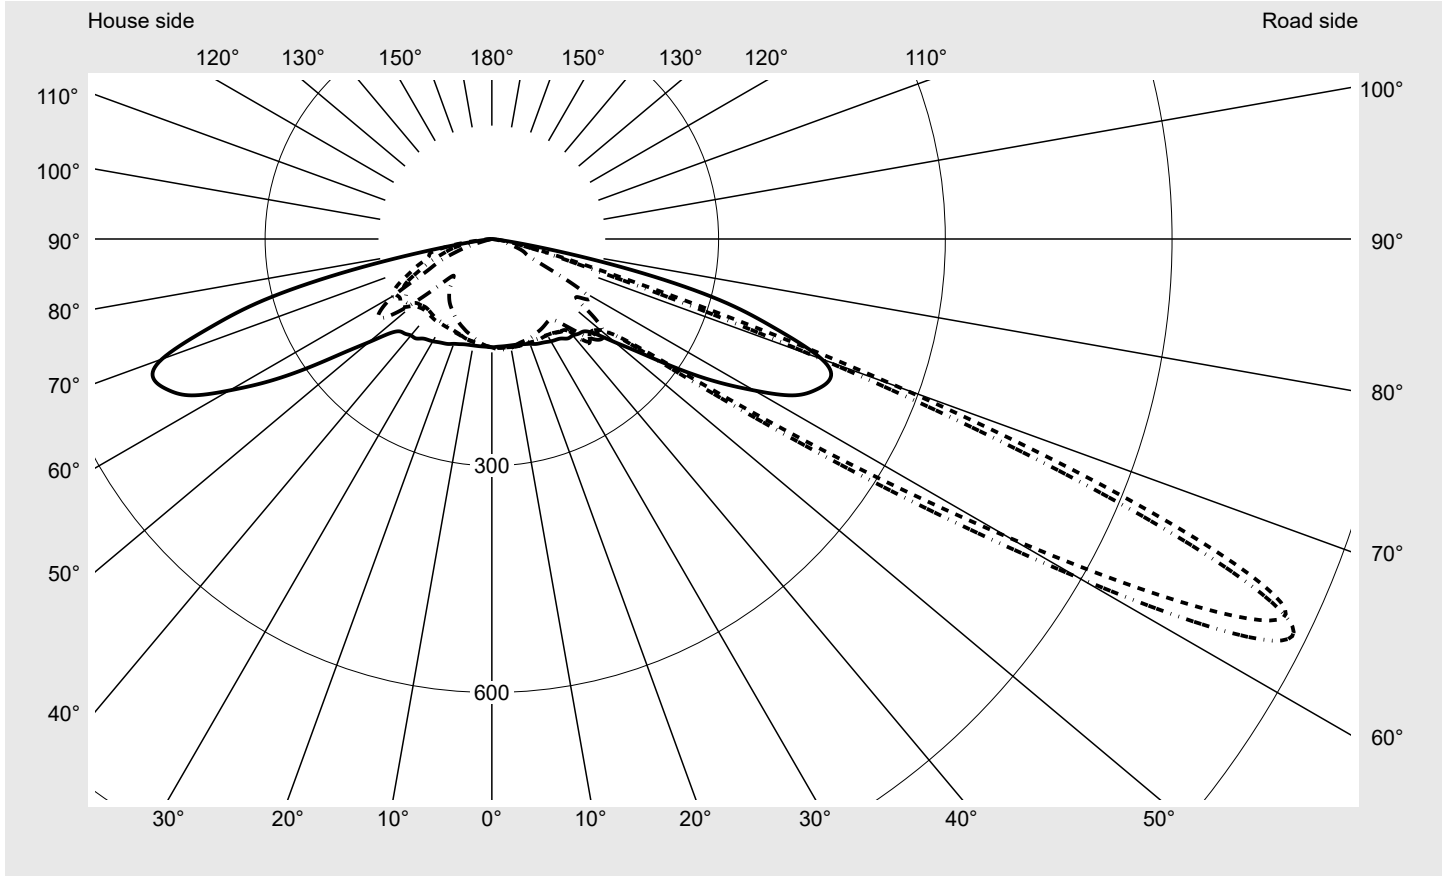


# Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution (ST1.5a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 9690 lm Power consumption = 70.9 W Luminous efficacy = 136.7 lm/W	<b>serial documentation</b> <b>12.09.2022</b>



**Luminous intensity in cd/klm**
C180-0
C215-35
C217,5-37,5
C270-90
**Imax: 1158 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	798.1
Imax 80°	214.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> 59337_238
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**      **siteco**

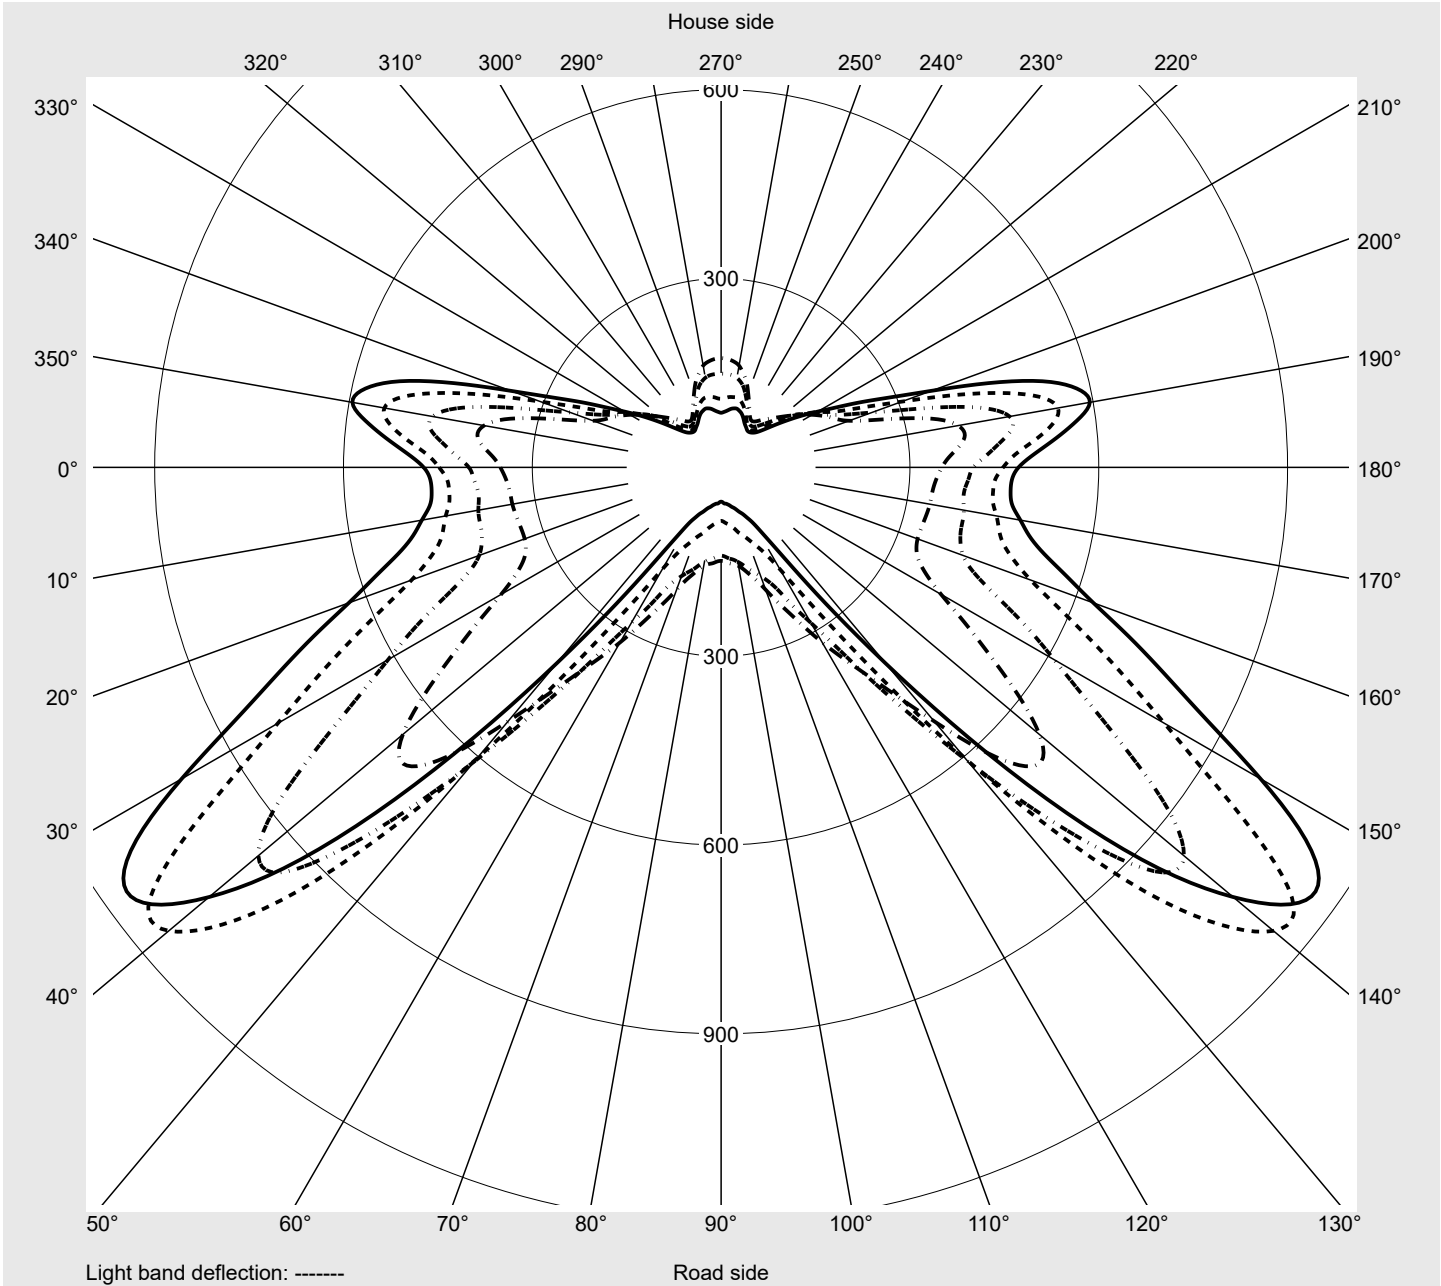

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.8	142.8	142.8	142.9	143.1	143.1	143.1	143.2	143.3	143.4	143.5	143.6	143.7	143.8	143.9
5,0°	142.7	142.9	143.0	143.1	143.3	143.5	143.6	143.7	143.9	143.9	144.0	144.1	144.2	144.3	144.4
7,5°	142.8	143.0	143.2	143.4	143.5	143.7	143.9	143.9	144.1	144.1	144.2	144.3	144.3	144.4	144.5
10,0°	143.0	143.3	143.5	143.6	143.9	144.0	144.0	144.1	144.2	144.3	144.4	144.5	144.7	144.8	145.1
12,5°	143.4	143.6	143.9	144.1	144.3	144.4	144.4	144.4	144.5	144.7	144.9	145.1	145.3	145.5	145.6
15,0°	144.2	144.5	144.8	144.9	145.1	145.1	145.1	145.2	145.4	145.6	145.7	146.0	146.0	146.1	146.1
17,5°	145.8	146.0	146.1	146.2	146.1	146.1	146.3	146.6	146.9	147.3	147.5	147.4	147.2	146.6	146.1
20,0°	147.6	147.9	147.9	147.8	147.6	147.5	148.0	148.5	149.0	149.4	149.3	149.1	148.4	147.2	145.9
22,5°	150.4	150.6	150.6	150.3	149.8	149.8	150.4	151.2	151.9	152.3	152.2	151.2	150.0	148.4	146.5
25,0°	152.1	152.6	152.7	152.4	151.8	151.8	152.5	153.5	154.3	154.7	154.1	152.8	151.0	149.1	147.2
27,5°	153.8	154.4	154.7	154.3	153.6	153.6	154.1	154.9	155.5	155.5	154.3	152.3	150.0	148.0	146.5
30,0°	156.3	157.0	157.4	156.8	155.7	155.5	155.7	156.0	156.0	155.2	153.4	151.2	149.2	147.9	147.1
32,5°	158.1	158.9	159.8	158.7	157.2	156.8	156.8	156.5	155.9	154.8	153.4	151.9	150.7	149.5	148.5
35,0°	160.7	161.8	162.6	162.2	160.9	160.1	159.4	158.7	158.1	157.0	155.7	154.5	153.2	152.0	151.0
37,5°	165.7	166.1	166.2	165.4	165.0	164.2	162.8	161.5	160.7	160.4	159.8	158.2	156.6	154.8	153.7
40,0°	166.6	168.0	168.8	167.7	167.3	166.7	165.5	164.1	163.2	162.3	161.4	160.3	159.5	159.1	159.4
42,5°	170.0	170.9	171.8	172.1	171.9	171.0	169.4	168.2	166.9	166.4	165.8	167.1	170.6	177.0	183.4
45,0°	172.8	175.4	177.0	177.0	176.3	174.8	173.5	173.2	174.0	177.6	181.1	184.0	186.0	187.8	186.7
47,5°	185.7	187.3	190.2	192.0	190.4	188.4	189.3	191.3	193.7	195.3	194.9	193.8	191.8	189.0	185.1
50,0°	212.4	217.2	220.2	221.6	222.5	223.0	223.3	222.1	219.2	214.6	208.3	202.9	198.2	194.4	191.1
52,5°	247.1	249.7	251.8	252.7	252.4	251.7	249.9	246.8	241.4	234.4	227.7	220.9	214.7	212.4	214.2
55,0°	297.3	297.7	296.4	295.8	295.4	294.0	291.1	286.7	281.1	274.7	268.6	263.1	262.8	276.5	308.0
57,5°	350.8	343.8	339.4	337.4	336.8	335.2	333.3	332.0	332.2	335.9	345.9	367.3	403.6	458.5	522.3
60,0°	400.7	393.9	388.9	388.3	391.7	393.1	394.0	398.8	409.1	433.6	481.3	545.9	610.9	689.2	790.7
62,5°	448.1	436.0	433.8	435.8	444.3	452.1	463.5	487.0	523.4	578.3	647.3	725.1	813.3	924.2	1055.4
65,0°	472.5	462.3	461.7	467.0	482.8	501.3	531.4	575.9	629.5	700.3	778.1	870.7	989.9	1101.5	1157.9
67,5°	484.2	471.1	471.3	481.5	504.1	534.5	585.0	642.0	703.7	780.6	869.3	953.0	995.9	986.1	943.8
70,0°	464.4	449.7	450.7	467.4	493.7	530.1	578.7	634.7	700.5	767.2	798.1	784.8	735.5	664.7	573.7
72,5°	392.8	388.4	393.0	413.7	440.2	469.5	503.0	541.4	565.4	566.1	534.9	483.8	414.8	333.4	252.8
75,0°	312.1	307.6	313.3	327.7	348.5	372.0	389.6	388.5	368.3	332.7	294.3	244.7	190.7	137.0	105.3
77,5°	189.9	195.2	198.5	206.5	221.1	230.8	229.7	213.5	188.8	161.7	132.1	99.8	74.0	60.2	51.1
80,0°	70.3	62.4	59.0	57.6	57.7	62.9	73.3	71.0	58.9	47.0	36.3	30.1	27.5	25.5	23.4
82,5°	14.9	14.1	13.5	13.4	13.9	14.7	15.6	15.7	14.3	11.7	10.5	10.4	10.5	10.5	10.1
85,0°	4.1	4.1	4.0	4.1	4.1	4.1	4.2	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.8
87,5°	2.1	2.1	2.1	2.2	2.2	2.2	2.1	2.1	2.1	2.0	1.9	1.9	1.9	1.8	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	144.1	144.2	144.3	144.4	144.4	144.6	144.8	144.9	145.0	145.1	145.1	145.2	145.2	145.2	145.3
5,0°	144.5	144.7	144.8	144.9	144.9	145.1	145.2	145.4	145.6	145.6	145.7	145.8	145.9	146.0	146.1
7,5°	144.7	144.9	145.1	145.2	145.4	145.6	145.8	146.1	146.2	146.5	146.7	146.8	146.9	147.0	147.1
10,0°	145.2	145.5	145.7	145.9	146.1	146.2	146.3	146.5	146.6	146.7	146.7	146.7	146.6	146.6	146.5
12,5°	145.7	145.9	146.1	146.1	146.1	146.0	146.0	145.9	145.6	145.4	145.2	145.0	144.8	144.7	144.6
15,0°	146.1	145.9	145.6	145.1	144.7	144.3	144.0	143.8	143.5	143.3	143.0	142.7	142.5	142.4	142.3
17,5°	145.3	144.7	144.1	143.4	142.7	142.2	141.7	141.5	141.3	141.2	141.2	141.0	141.0	140.9	141.0
20,0°	144.5	143.3	142.3	141.7	141.2	140.9	140.5	140.5	140.3	140.4	140.3	140.3	140.3	140.4	140.3
22,5°	144.7	143.2	142.2	141.4	140.9	140.6	140.5	140.3	140.1	140.1	140.1	140.1	140.1	140.0	140.0
25,0°	145.3	143.8	142.6	141.9	141.4	141.1	140.9	140.7	140.4	140.1	139.9	139.6	139.2	139.0	138.7
27,5°	145.4	144.7	144.0	143.4	142.6	142.1	141.4	140.8	140.1	139.5	138.8	138.3	138.0	137.7	137.4
30,0°	146.6	146.3	146.1	145.6	144.4	143.1	141.8	140.7	139.7	138.9	138.3	137.6	137.1	136.7	136.2
32,5°	147.9	148.3	149.4	149.2	147.7	145.3	143.3	141.7	140.4	139.2	138.3	137.2	136.3	135.5	134.8
35,0°	150.4	150.2	150.8	151.6	149.9	147.1	144.6	142.5	140.6	139.0	137.8	136.6	135.8	134.9	134.1
37,5°	152.8	151.9	150.7	149.7	150.1	149.1	146.8	143.8	141.6	139.8	138.4	136.9	135.7	134.7	134.1
40,0°	161.0	164.5	168.6	171.3	172.7	172.2	170.1	166.1	160.9	154.8	148.7	143.6	140.7	139.7	140.2
42,5°	186.8	187.3	186.7	184.0	179.0	173.8	170.0	166.2	161.1	157.4	154.7	152.9	152.7	153.8	155.1
45,0°	182.8	178.9	174.1	169.8	166.6	164.1	163.1	163.3	163.6	164.9	166.2	167.6	169.7	172.0	174.0
47,5°	180.0	176.2	173.4	171.2	170.1	170.8	172.0	175.4	179.8	184.3	187.4	189.6	191.8	193.5	194.1
50,0°	187.5	185.2	183.9	184.0	187.3	192.4	199.0	205.3	210.0	214.2	216.3	214.8	212.0	209.8	207.2
52,5°	218.8	227.2	239.6	251.9	261.3	267.0	266.2	261.5	253.9	247.3	244.9	235.9	226.3	216.2	206.7
55,0°	351.2	391.6	419.1	432.1	429.9	408.9	375.3	339.6	313.6	292.8	274.7	252.0	228.2	207.5	190.9
57,5°	595.6	660.1	690.6	669.0	605.5	526.5	457.2	401.8	358.6	321.1	285.3	254.5	229.7	207.0	188.8
60,0°	897.1	959.8	952.8	864.4	739.0	609.8	497.0	406.8	334.3	285.2	249.3	216.0	196.1	183.8	174.5
62,5°	1147.2	1145.6	1075.2	953.7	783.7	604.3	437.1	316.8	238.8	187.0	157.2	140.6	129.3	119.9	112.9
65,0°	1140.2	1062.0	943.2	776.3	584.1	406.2	271.7	178.5	129.0	102.9	90.7	82.1	76.9	71.7	67.6
67,5°	852.9	715.2	554.7	398.3	252.6	153.7	106.1	81.9	70.1	64.3	61.5	59.7	59.3	58.8	56.0
70,0°	460.6	337.8	231.0	155.4	103.2	75.1	62.5	55.5	51.5	49.6	48.1	46.9	45.9	46.1	46.2
72,5°	182.3	140.9	106.6	78.2	58.1	47.0	41.2	38.6	37.0	36.0	35.6	34.2	33.6	32.9	27.9
75,0°	85.2	71.5	56.9	44.0	35.4	29.8	27.3	26.0	25.1	24.5	24.2	23.4	22.1	19.8	19.4
77,5°	44.0	38.2	31.8	25.6	21.3	19.0	18.3	17.5	16.9	16.5	16.3	15.8	15.2	14.8	14.4
80,0°	21.2	19.3	16.6	14.1	12.4	11.8	11.6	11.4	11.0	10.9	10.7	10.4	10.1	9.9	9.7
82,5°	9.4	8.9	8.3	7.5	6.9	6.6	6.7	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.8
85,0°	3.6	3.6	3.5	3.3	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.8	2.6	2.6
87,5°	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
---	--	--------------------------------------



### Table of values for luminous intensities Maximum luminous intensity

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	145.3	145.4	145.4	145.5	145.6	145.6	145.6	142.6	142.5	142.3	142.2	142.2	142.1	142.1	142.1
5,0°	146.1	146.2	146.3	146.4	146.4	146.5	146.5	142.6	142.3	142.0	141.8	141.7	141.5	141.4	141.3
7,5°	147.2	147.2	147.4	147.4	147.4	147.4	147.4	142.5	142.2	141.9	141.5	141.3	141.0	140.9	140.6
10,0°	146.5	146.6	146.6	146.5	146.5	146.5	146.5	142.6	142.2	141.8	141.4	141.0	140.9	140.5	140.2
12,5°	144.4	144.5	144.4	144.4	144.3	144.3	144.2	142.9	142.4	142.0	141.5	141.1	140.7	140.4	139.9
15,0°	142.2	142.2	142.3	142.3	142.3	142.3	142.2	143.8	143.3	142.8	142.3	141.9	141.5	141.2	140.7
17,5°	141.1	141.2	141.3	141.4	141.4	141.4	141.4	145.2	144.8	144.3	143.6	143.0	142.4	141.8	140.8
20,0°	140.4	140.5	140.5	140.7	140.8	140.8	140.8	147.3	146.5	145.6	144.8	143.9	143.0	141.8	140.5
22,5°	139.9	139.8	139.7	139.7	139.6	139.7	139.6	149.4	148.7	147.6	146.5	145.5	144.1	142.5	140.9
25,0°	138.4	138.1	138.0	137.9	137.9	137.9	137.9	151.2	150.2	149.3	148.4	147.4	145.6	143.9	142.0
27,5°	137.1	136.8	136.6	136.5	136.6	136.5	136.6	152.7	151.8	150.9	149.9	148.7	147.0	145.2	143.3
30,0°	135.8	135.5	135.2	135.0	134.9	134.9	134.9	155.2	153.9	152.7	151.4	149.7	147.9	146.1	144.4
32,5°	134.2	133.8	133.5	133.2	133.0	132.9	133.0	156.7	155.1	153.8	152.3	150.5	148.7	147.0	145.0
35,0°	133.5	133.0	132.6	132.3	132.1	131.9	131.7	159.5	158.1	156.8	154.7	152.5	150.7	148.8	146.6
37,5°	134.1	134.6	135.3	135.8	135.6	135.3	135.3	164.1	162.4	160.4	157.6	155.1	152.7	150.7	148.2
40,0°	141.5	143.4	145.4	147.7	148.3	148.1	148.2	165.1	164.0	162.6	160.2	157.7	155.5	153.2	150.2
42,5°	156.6	158.9	161.5	164.4	166.1	166.3	166.6	167.6	166.7	164.7	162.6	160.7	158.1	155.4	152.1
45,0°	175.6	177.6	179.9	182.7	184.9	185.8	186.2	171.1	169.4	167.5	165.8	163.4	161.1	158.2	154.7
47,5°	193.8	193.5	193.6	194.5	196.0	196.2	196.3	180.0	178.3	175.0	171.8	168.7	165.6	162.4	158.6
50,0°	204.0	200.6	199.2	198.4	196.3	193.5	192.8	212.1	205.3	200.3	195.6	190.4	185.6	180.4	173.7
52,5°	197.6	189.8	183.6	178.6	174.9	172.1	170.8	243.5	242.7	237.2	226.1	212.7	202.8	194.8	186.6
55,0°	177.1	164.9	154.2	146.9	142.0	137.7	136.4	306.3	307.5	309.4	296.7	269.6	235.8	209.4	194.7
57,5°	176.5	166.2	159.0	155.0	152.9	149.8	148.6	362.1	379.4	390.6	382.5	352.8	300.9	249.5	216.4
60,0°	167.1	158.5	152.4	147.8	145.2	141.9	140.3	421.2	444.2	465.8	465.4	432.2	370.1	303.7	255.1
62,5°	107.3	100.2	95.5	91.5	89.0	86.4	85.0	467.6	500.7	531.6	543.3	518.0	456.8	379.0	305.5
65,0°	64.9	61.8	59.7	58.1	57.6	55.5	54.5	498.8	534.5	570.4	594.8	578.8	528.7	445.1	355.5
67,5°	53.4	51.7	50.7	49.7	48.7	47.1	47.2	511.9	544.5	577.9	603.6	591.4	551.6	488.4	410.8
70,0°	43.2	41.3	40.3	39.7	39.7	39.7	39.6	483.2	514.9	547.5	567.8	560.5	538.9	500.0	449.0
72,5°	25.2	23.6	23.4	23.5	30.6	32.6	28.2	418.6	437.7	467.2	483.2	493.6	490.6	479.8	460.1
75,0°	19.3	18.6	18.2	18.1	30.1	24.0	20.9	317.6	333.1	354.8	376.5	394.0	408.6	419.8	423.9
77,5°	13.9	13.6	13.2	13.1	14.9	14.6	14.3	205.9	210.9	224.6	243.3	263.8	286.8	308.4	326.0
80,0°	9.3	8.9	8.7	8.6	8.8	8.9	9.2	74.8	83.6	95.3	110.3	128.9	151.2	174.9	196.6
82,5°	5.5	5.2	5.0	4.9	4.9	5.3	5.5	17.3	18.5	21.3	25.4	31.0	39.7	52.1	68.0
85,0°	2.4	2.4	2.4	2.3	2.4	2.3	2.3	3.8	4.0	4.0	3.9	3.9	3.8	3.8	3.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.0	141.9	141.9	141.9	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.7
5,0°	141.2	140.9	140.9	140.9	140.8	140.7	140.6	140.4	140.3	140.2	140.1	140.1	140.0	139.8	139.9
7,5°	140.4	140.1	140.0	139.7	139.6	139.3	139.2	139.0	138.8	138.7	138.5	138.4	138.3	138.1	137.9
10,0°	139.9	139.6	139.2	139.0	138.8	138.4	138.1	137.7	137.2	136.9	136.4	136.0	135.7	135.3	134.9
12,5°	139.6	139.3	139.0	138.7	138.1	137.6	137.1	136.4	135.9	135.4	134.9	134.4	133.8	133.2	132.8
15,0°	140.2	139.6	138.8	138.0	137.3	136.6	135.9	135.1	134.3	133.6	132.8	131.9	131.1	130.4	129.8
17,5°	139.7	138.5	137.5	136.4	135.4	134.6	133.9	133.2	132.3	131.4	130.6	129.8	129.0	128.3	127.5
20,0°	139.1	137.8	136.6	135.4	134.4	133.3	132.3	131.4	130.4	129.4	128.5	127.6	126.8	125.9	125.3
22,5°	139.3	137.8	136.4	135.2	133.8	132.4	131.1	129.8	128.5	127.4	126.3	125.4	124.4	123.6	123.0
25,0°	140.1	138.4	136.7	134.9	133.2	131.5	129.9	128.5	126.9	125.5	124.5	123.3	122.4	121.4	120.6
27,5°	141.3	139.2	137.1	134.9	132.8	131.0	129.1	127.2	125.6	124.0	122.8	121.6	120.3	119.1	118.2
30,0°	142.2	140.0	137.6	135.3	132.9	130.7	128.7	126.7	124.8	122.9	121.3	119.9	118.3	116.9	115.6
32,5°	142.9	140.5	138.3	135.8	133.2	130.8	128.5	126.2	123.9	121.9	119.9	118.2	116.5	114.8	113.1
35,0°	144.0	141.3	138.6	135.9	133.3	131.0	128.2	125.6	122.9	120.5	118.2	116.0	114.1	112.2	110.5
37,5°	145.2	142.2	139.2	136.3	133.5	130.3	127.4	124.7	121.8	118.7	116.0	113.6	111.4	109.5	107.9
40,0°	146.9	143.5	140.1	136.9	133.5	129.9	126.4	123.1	120.3	117.3	114.2	111.2	108.6	106.5	104.9
42,5°	148.3	144.3	140.5	137.2	133.5	129.6	125.7	122.1	118.7	115.6	112.2	109.2	106.0	103.3	101.0
45,0°	150.4	146.1	141.8	137.8	134.0	130.3	126.3	122.5	118.4	114.9	111.1	107.4	103.6	99.7	96.4
47,5°	154.1	149.6	145.6	141.5	137.5	132.9	128.8	124.5	120.0	115.9	112.0	107.6	103.4	99.2	94.9
50,0°	166.8	160.9	155.2	149.5	143.5	137.9	131.6	126.4	122.1	117.8	113.2	108.3	104.2	100.6	97.6
52,5°	179.8	174.5	170.1	164.1	156.2	147.8	139.1	130.8	123.7	117.4	111.7	105.9	101.2	98.0	96.6
55,0°	185.2	177.8	170.1	162.7	154.9	147.7	140.2	134.0	127.2	119.1	111.1	103.6	97.7	94.2	93.3
57,5°	199.9	189.5	178.3	167.1	155.5	144.5	134.5	125.1	116.9	109.6	103.4	97.8	92.4	89.1	88.8
60,0°	220.3	197.3	182.2	170.4	157.7	146.8	134.4	121.2	108.5	98.4	90.5	84.7	81.8	81.5	82.9
62,5°	252.5	213.6	190.4	175.7	159.1	144.8	128.9	112.2	98.3	87.7	81.0	76.8	75.3	76.6	78.9
65,0°	290.5	245.2	206.5	177.3	153.7	132.3	113.9	98.3	86.6	78.9	74.8	72.4	71.4	72.1	74.4
67,5°	339.6	279.5	227.5	177.0	142.6	117.7	98.8	85.5	76.4	71.1	68.2	66.4	65.4	65.9	67.6
70,0°	393.3	334.0	256.5	185.8	133.6	105.7	86.3	74.3	67.3	63.1	60.3	58.7	58.0	57.8	59.4
72,5°	430.2	379.5	299.1	206.5	133.5	92.5	71.9	61.6	56.0	52.6	50.3	48.5	47.7	47.8	49.6
75,0°	415.5	386.9	326.1	231.4	141.2	86.0	60.7	50.0	44.1	40.5	38.4	37.2	37.1	37.4	38.3
77,5°	334.1	328.0	299.2	241.7	154.5	82.0	48.4	36.8	31.1	28.1	26.7	25.5	25.2	25.7	26.4
80,0°	211.1	214.2	200.9	168.0	117.3	62.4	29.3	20.8	17.4	15.4	14.2	13.9	13.9	14.3	13.9
82,5°	78.3	80.0	78.5	71.8	58.2	35.0	15.2	8.8	7.4	6.4	5.7	5.3	5.4	5.7	5.6
85,0°	3.8	3.8	4.0	4.1	4.3	4.2	3.4	2.7	2.4	2.3	2.1	2.0	1.9	1.8	1.7
87,5°	1.9	1.8	1.8	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	0.2	0.2
2,5°	141.8	141.8	141.8	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.9	141.9	1.7	1.9
5,0°	139.8	139.7	139.8	139.7	139.7	139.6	139.6	139.7	139.6	139.6	139.7	139.7	139.6	3.4	5.3
7,5°	137.7	137.5	137.4	137.2	137.1	137.0	136.8	136.7	136.7	136.6	136.6	136.6	136.6	5.1	10.4
10,0°	134.7	134.5	134.1	133.9	133.6	133.5	133.3	133.2	133.2	133.2	133.1	133.1	133.2	6.7	17.1
12,5°	132.3	131.9	131.5	131.1	130.8	130.5	130.2	130.0	129.9	129.8	129.8	129.7	129.8	8.3	25.5
15,0°	129.2	128.7	128.1	127.7	127.4	127.2	127.0	126.9	127.0	127.0	127.1	127.2	127.2	9.9	35.3
17,5°	126.8	126.2	125.5	125.1	124.6	124.3	124.2	124.0	124.0	123.9	124.0	123.9	123.9	11.4	46.7
20,0°	124.7	124.2	123.5	122.9	122.3	121.8	121.4	121.1	120.9	120.8	120.8	120.8	120.8	12.9	59.6
22,5°	122.4	121.8	121.2	120.6	119.8	119.1	118.5	118.1	117.8	117.6	117.6	117.5	117.4	14.4	74.0
25,0°	119.7	119.1	118.3	117.7	116.9	116.1	115.6	115.1	114.5	114.3	114.2	114.1	114.2	15.9	89.9
27,5°	117.0	116.1	115.3	114.7	113.9	113.2	112.5	111.8	111.1	110.6	110.3	110.1	110.1	17.3	107.2
30,0°	114.3	113.3	112.4	111.5	110.7	110.0	109.2	108.5	107.8	107.0	106.6	106.5	106.4	18.6	125.8
32,5°	111.8	110.6	109.5	108.5	107.6	106.7	105.9	105.2	104.4	103.6	103.1	102.7	102.7	20.0	145.8
35,0°	109.1	107.8	106.6	105.6	104.4	103.3	102.3	101.5	100.6	99.6	98.8	98.2	98.1	21.4	167.2
37,5°	106.5	105.1	103.7	102.4	101.0	99.3	98.0	96.9	95.9	94.8	93.8	93.0	92.8	22.8	190.0
40,0°	103.2	101.4	99.7	98.0	96.0	93.8	92.0	90.9	89.8	88.6	87.6	86.9	86.8	24.7	214.6
42,5°	98.6	96.1	93.4	90.9	88.6	86.1	84.7	83.9	82.1	80.4	79.4	78.7	78.7	26.6	241.3
45,0°	92.8	89.4	86.2	83.0	80.4	77.9	76.4	75.7	74.4	73.1	72.5	71.9	71.7	28.4	269.7
47,5°	90.8	87.5	84.4	82.0	80.0	78.3	77.1	77.0	76.7	76.5	76.6	76.5	76.4	31.1	300.7
50,0°	95.5	94.6	94.8	96.3	98.8	101.6	104.9	109.2	112.6	115.5	117.9	119.1	119.4	35.8	336.5
52,5°	97.6	100.0	104.4	110.6	118.5	126.5	134.5	142.9	149.7	155.3	159.0	161.2	161.7	41.6	378.2
55,0°	96.1	101.2	108.2	117.3	128.1	139.3	149.5	159.6	168.4	174.7	179.0	181.7	182.0	50.3	428.5
57,5°	92.0	97.7	105.7	115.2	125.6	137.4	147.7	156.0	164.1	168.5	171.3	173.0	173.5	62.1	490.5
60,0°	86.4	92.0	99.3	107.9	116.7	125.7	134.1	140.1	144.4	147.1	148.2	148.8	148.9	73.7	564.2
62,5°	82.3	86.6	92.5	98.5	103.8	108.3	112.0	113.8	113.3	112.8	111.5	109.6	109.0	81.0	645.2
65,0°	77.0	80.1	84.5	88.9	92.5	94.7	96.5	96.0	94.6	92.1	89.7	87.9	86.8	81.9	727.1
67,5°	71.0	74.2	78.2	81.7	83.6	84.2	84.2	82.0	79.9	77.4	74.4	72.9	71.2	75.6	802.6
70,0°	62.4	65.9	69.3	72.3	71.9	69.4	67.1	62.8	60.2	56.1	54.8	52.6	50.9	64.8	867.5
72,5°	51.7	55.1	56.3	57.8	55.6	52.7	49.5	43.5	40.9	37.7	40.4	36.4	33.9	51.4	918.8
75,0°	40.3	40.8	40.7	39.5	38.9	34.0	24.1	14.9	12.9	12.3	18.1	12.0	11.0	38.4	957.2
77,5°	26.4	26.6	26.8	23.3	15.7	8.2	7.0	6.6	6.4	5.6	5.3	4.7	4.7	25.3	982.6
80,0°	14.0	13.2	11.4	6.5	4.5	4.0	3.4	3.2	3.0	2.4	1.9	1.7	1.8	12.1	994.7
82,5°	5.4	4.7	3.5	2.7	2.4	2.1	1.9	1.7	1.5	1.2	1.1	1.1	1.0	4.2	998.8
85,0°	1.5	1.5	1.4	1.2	1.2	1.1	1.0	0.9	0.9	0.7	0.7	0.7	0.6	0.8	999.6
87,5°	1.0	1.0	0.9	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> 59337_238
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9690	70.9	75.1	73.0
95	241	252	9194	65.9	69.9	67.9
90	229	250	8736	61.6	65.3	63.4
85	216	248	8240	57.1	60.5	58.8
80	203	246	7744	52.8	55.8	54.3
75	190	243	7248	48.7	51.5	50.1
70	178	241	6791	45.0	47.6	46.3
65	165	238	6295	41.2	43.6	42.4
60	152	235	5799	37.5	39.5	38.5
55	140	232	5341	34.2	36.1	35.2
50	127	229	4845	30.7	32.4	31.6
45	114	225	4349	27.5	28.9	28.2
40	102	221	3891	24.4	25.7	25.0
35	89	216	3395	21.3	22.4	21.8
30	76	210	2899	18.2	19.1	18.6
25	63	203	2403	15.4	16.1	15.8
20	51	195	1946	12.7	13.3	13.0
15	38	184	1450	9.9	10.3	10.1
11	27	172	1030	7.9	8.0	8.0

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9690	69.0	71.9	70.4
95	241	252	9194	64.5	67.1	65.8
90	229	250	8736	60.4	62.9	61.6
85	216	248	8240	56.2	58.4	57.3
80	203	246	7744	52.1	54.1	53.1
75	190	243	7248	48.1	50.0	49.0
70	178	241	6791	44.5	46.3	45.4
65	165	238	6295	40.9	42.5	41.7
60	152	235	5799	37.2	38.7	38.0
55	140	232	5341	34.0	35.3	34.6
50	127	229	4845	30.7	31.8	31.2
45	114	225	4349	27.4	28.3	27.8
40	102	221	3891	24.4	25.3	24.8
35	89	216	3395	21.2	22.1	21.6
30	76	210	2899	18.3	18.9	18.6
25	63	203	2403	15.4	15.9	15.6
20	51	195	1946	12.8	13.2	13.0
15	38	184	1450	10.0	10.3	10.2
11	27	172	1030	8.0	8.1	8.0



## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> 59337_238
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9690	69.8	72.8	71.3
95	241	252	9194	65.0	67.8	66.4
90	229	250	8736	60.9	63.5	62.2
85	216	248	8240	56.5	58.8	57.6
80	203	246	7744	52.4	54.4	53.4
75	190	243	7248	48.4	50.3	49.3
70	178	241	6791	44.7	46.5	45.6
65	165	238	6295	41.0	42.5	41.8
60	152	235	5799	37.4	38.7	38.0
55	140	232	5341	34.1	35.4	34.8
50	127	229	4845	30.6	31.8	31.2
45	114	225	4349	27.4	28.3	27.8
40	102	221	3891	24.4	25.3	24.8
35	89	216	3395	21.3	22.0	21.6
30	76	210	2899	18.3	18.8	18.6
25	63	203	2403	15.4	15.9	15.6
20	51	195	1946	12.7	13.1	12.9
15	38	184	1450	10.0	10.3	10.2
11	27	172	1030	7.9	8.0	8.0

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P41D08HB</b> <b>EAN: 4058352726266</b>	<b>LP number</b> <b>59337_238</b>
--	--	--------------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9690.0	70.9
5.0	9690.0	69.0
15.0	9690.0	69.8