




Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
	Version	post-top or side-entry mounting, NEMA 7 pin (DALI)
	Optic	asymmetric, wide distribution (ST0.5a)
	Cover	toughened safety glass
	Lamps	LED 3000 K CRI ≥ 70
	Controlgear	ECG-DALI Plus
Rated values	Net luminous flux = 5110 lm Power consumption = 39.1 W Luminous efficacy = 130.7 lm/W	
		serial documentation 16.06.2023
		

Luminous intensity in cd/klm
C180-0
C205-25
C207.5-27.5
C270-90
Imax: 661 cd/klm

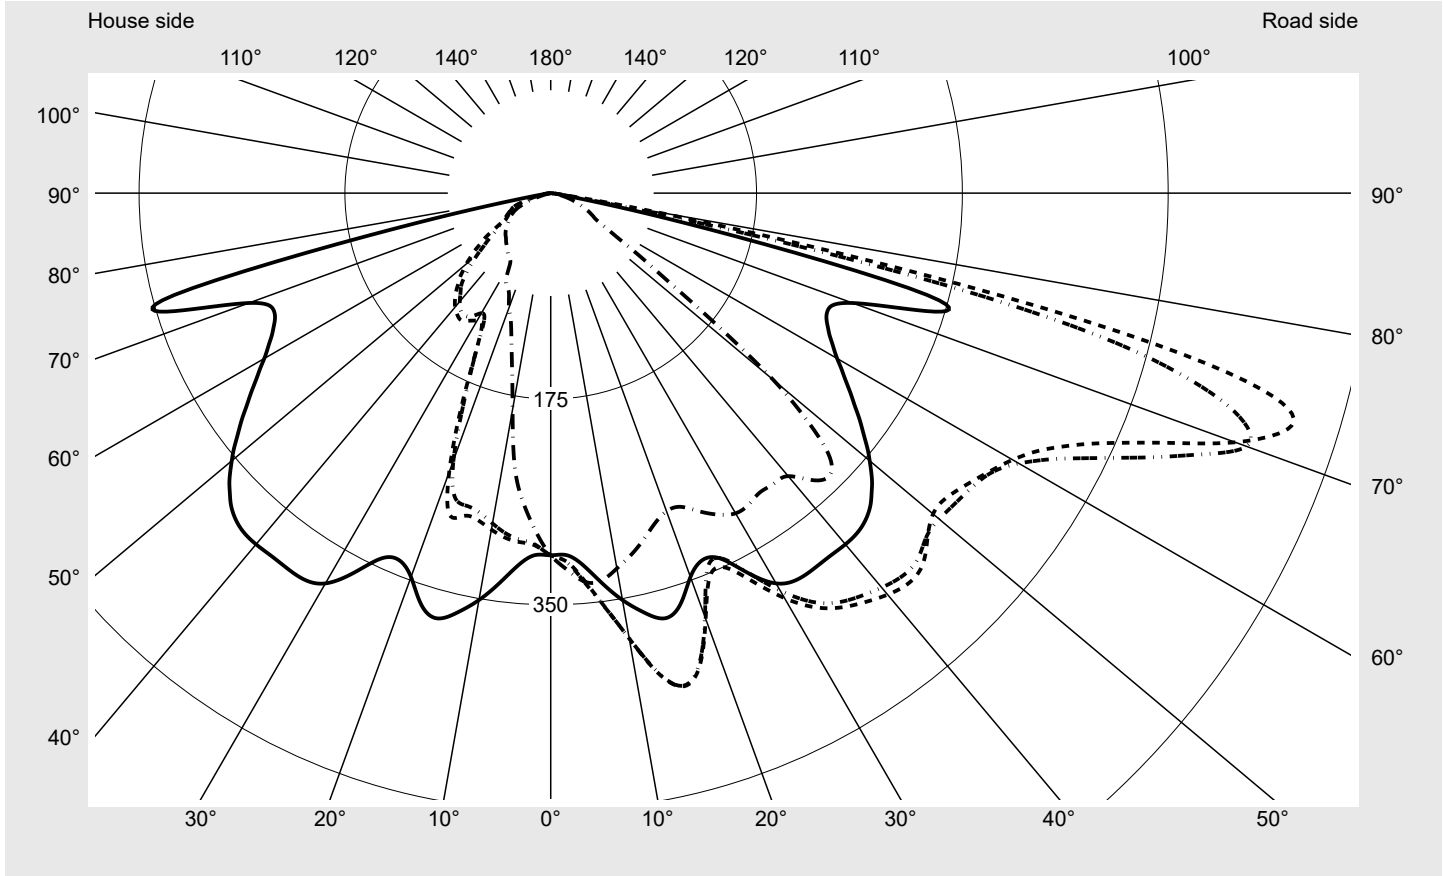

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	629.6
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	--------------------------------

Envelope curve in cd/klm **KMK 73°** **KMK 72°** **KMK 71°** **KMK 70°** **siteco**

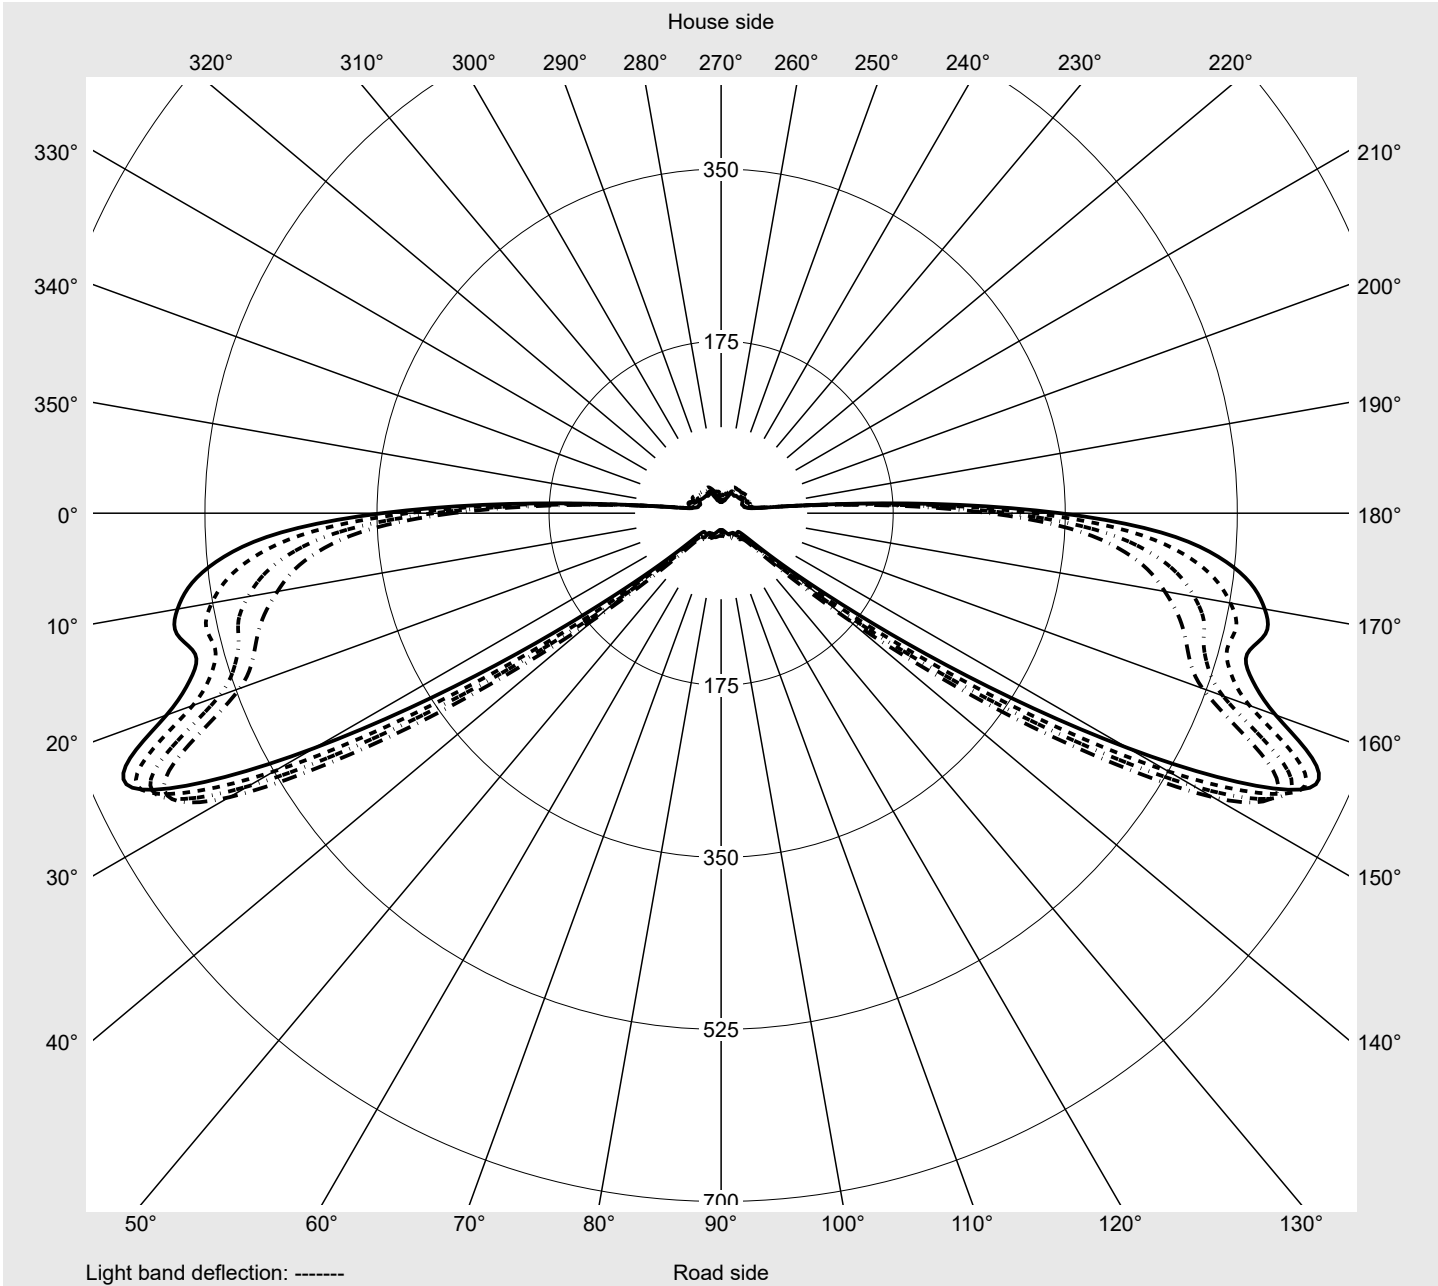

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	308.1	308.8	309.3	310.1	310.8	311.3	311.8	312.4	312.9	313.4	313.7	314.3	314.7	315.1	316.0
5,0°	317.7	319.6	321.6	323.5	325.2	326.6	327.6	328.5	329.3	330.1	331.0	332.4	333.0	333.5	333.7
7,5°	334.5	338.4	342.1	345.1	347.7	349.5	351.2	352.4	353.7	354.6	355.3	355.6	355.6	355.3	354.8
10,0°	351.3	358.1	364.1	369.2	373.3	376.6	379.4	381.6	383.3	384.1	384.6	384.4	383.1	381.3	378.6
12,5°	365.0	374.7	383.1	390.4	396.3	402.2	406.9	411.9	413.7	416.2	416.9	416.3	414.2	410.6	405.9
15,0°	374.3	385.3	394.7	402.2	409.1	415.6	422.0	428.1	430.4	433.1	434.2	433.6	431.6	428.4	425.3
17,5°	366.6	377.4	386.3	393.5	400.0	406.2	412.2	417.2	419.8	421.5	421.3	419.8	417.1	413.9	411.0
20,0°	347.4	357.9	364.2	370.8	374.9	380.5	383.7	388.9	389.3	389.1	385.2	383.5	378.6	376.6	370.5
22,5°	337.6	345.7	350.7	355.3	358.9	362.7	365.0	367.5	364.6	359.8	353.3	347.3	340.8	334.2	327.2
25,0°	343.1	350.8	356.8	361.5	366.2	369.4	371.4	370.6	365.9	359.1	351.2	342.5	333.5	323.5	313.5
27,5°	364.4	373.1	379.9	385.6	390.9	395.0	395.9	392.9	387.3	380.2	372.3	364.0	355.5	347.0	337.5
30,0°	383.2	393.7	402.4	410.0	416.8	421.5	422.0	418.2	412.2	405.2	397.5	390.2	383.3	376.7	368.4
32,5°	389.7	403.3	414.6	425.2	434.7	440.7	441.1	437.1	431.2	424.4	417.4	411.8	406.8	402.3	396.2
35,0°	389.9	408.1	422.8	436.2	448.1	454.9	455.0	450.8	444.2	436.7	430.0	424.8	420.3	416.5	413.7
37,5°	389.4	413.4	432.2	449.5	463.9	471.1	469.9	463.8	455.5	446.4	438.5	432.1	426.8	423.8	424.8
40,0°	389.8	420.3	443.7	464.5	480.6	487.4	485.0	477.2	466.8	455.4	445.6	437.8	432.1	430.1	433.0
42,5°	388.6	425.8	453.7	477.2	494.3	500.9	497.4	487.3	474.9	461.5	450.1	442.0	437.8	438.7	442.0
45,0°	382.6	425.9	457.7	483.1	500.5	506.7	502.1	490.3	475.2	459.4	447.1	440.8	440.7	447.7	460.0
46,0°	378.5	424.2	457.4	483.2	500.5	506.5	501.5	489.1	472.7	455.5	442.7	437.9	441.5	453.3	469.4
47,0°	373.1	421.4	456.4	482.8	499.9	505.7	500.5	487.1	469.1	450.4	437.3	434.5	443.8	462.6	479.9
48,0°	367.7	418.5	455.1	481.8	498.7	504.2	498.6	484.5	465.0	444.9	431.9	432.0	447.1	470.0	486.0
49,0°	361.1	414.7	453.0	480.3	496.8	502.0	496.1	481.3	460.4	439.5	427.5	431.0	450.3	474.7	489.4
50,0°	354.0	410.0	450.3	478.1	494.6	499.5	493.4	477.9	455.7	434.5	424.4	431.2	452.1	475.8	489.4
51,0°	346.9	405.0	447.1	475.4	491.9	496.9	490.7	474.6	451.6	431.0	423.2	431.9	452.4	474.4	486.6
52,0°	338.9	399.3	443.0	472.0	488.9	494.4	488.3	471.8	448.7	429.4	423.9	432.9	450.9	469.4	480.7
53,0°	331.3	393.6	439.0	468.6	485.7	491.8	486.1	469.5	447.1	429.9	425.9	434.0	449.2	464.7	475.3
54,0°	323.8	387.7	434.4	464.5	481.9	488.6	483.7	467.9	447.1	432.0	428.6	435.2	447.5	460.6	472.2
55,0°	315.7	381.2	429.2	459.8	477.6	485.1	481.1	466.9	448.4	435.2	431.9	436.8	446.5	458.6	472.3
56,0°	308.5	375.6	424.4	455.3	473.4	481.6	479.1	466.8	450.7	439.1	435.5	438.7	447.2	459.9	475.6
57,0°	301.2	369.6	419.0	450.0	468.5	477.8	477.1	467.3	453.6	443.4	439.3	441.4	449.8	464.8	481.3
58,0°	294.2	363.8	413.9	445.0	463.8	474.3	475.7	468.1	456.6	447.8	443.5	445.5	455.3	472.8	489.0
59,0°	287.8	358.6	409.3	440.2	459.3	471.2	474.9	469.1	459.4	451.9	448.2	451.4	463.7	482.6	496.5
60,0°	281.2	352.9	404.1	434.7	454.0	467.9	474.1	470.1	462.0	455.9	453.5	459.6	476.1	496.8	505.2
61,0°	275.7	348.2	399.8	430.1	449.8	465.3	473.5	471.2	464.6	460.2	459.9	469.9	489.9	509.8	510.1
62,0°	270.9	343.8	395.4	425.6	445.9	463.0	473.1	472.3	467.5	465.0	467.7	481.9	504.6	522.3	512.5
63,0°	266.1	339.3	390.7	421.0	442.6	461.3	472.8	473.6	471.0	471.0	477.7	496.8	522.5	533.2	507.7
64,0°	262.4	336.0	386.9	417.2	439.9	460.0	472.6	475.0	475.0	478.4	490.0	513.9	539.4	539.5	498.2
65,0°	259.0	332.9	383.5	414.0	437.6	459.0	472.4	476.3	479.3	487.3	504.4	532.5	553.7	539.0	483.0
66,0°	256.6	330.6	380.9	411.6	436.4	458.8	472.5	477.9	484.3	498.3	522.3	552.6	564.1	531.2	460.2
67,0°	255.8	329.5	378.9	409.8	435.4	457.7	472.8	480.0	490.4	511.5	543.0	572.8	569.4	519.5	439.1
68,0°	256.9	330.8	380.0	411.0	436.2	457.8	474.1	483.3	497.7	526.9	566.8	593.5	572.4	504.8	412.3
69,0°	262.1	338.0	387.8	418.7	442.0	461.6	478.2	489.1	507.1	545.2	593.9	614.9	578.0	493.5	388.3
70,0°	273.1	354.5	405.0	437.4	458.2	475.8	488.7	500.0	521.1	567.1	619.4	629.6	577.9	474.0	361.2
71,0°	292.3	380.4	434.2	467.9	488.6	502.8	508.0	519.1	543.1	594.3	640.0	629.2	555.4	441.6	324.0
72,0°	318.8	414.0	471.3	505.8	526.0	536.5	532.9	543.9	571.9	624.9	655.4	616.0	525.2	404.9	284.4

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	316.4	316.7	317.0	317.2	317.9	318.4	318.7	318.5	318.5	318.4	318.7	319.2	319.3	319.4	319.5
5,0°	334.2	333.8	334.5	334.3	334.7	334.4	334.7	334.6	334.1	333.8	333.7	333.1	333.2	332.9	333.0
7,5°	354.1	353.4	352.6	351.5	350.2	349.0	347.8	346.0	344.7	343.2	341.8	340.5	339.2	338.1	337.0
10,0°	376.0	372.5	369.3	365.0	361.2	357.0	352.8	349.2	345.8	342.6	339.7	337.3	335.1	333.0	331.2
12,5°	400.3	393.0	385.1	377.4	369.8	362.7	356.8	351.0	345.7	340.9	336.8	333.2	330.1	327.3	324.8
15,0°	422.3	415.9	407.6	397.9	387.0	376.0	363.8	354.9	346.8	339.9	334.1	328.9	324.4	320.5	317.1
17,5°	407.4	403.1	399.0	393.8	387.9	380.5	368.8	359.1	348.8	339.0	330.7	323.9	318.1	313.0	308.6
20,0°	370.3	364.8	363.7	360.0	358.5	356.2	353.8	350.7	345.5	337.7	328.6	319.8	312.7	307.0	302.0
22,5°	324.7	323.4	323.0	322.5	321.8	321.3	322.5	324.0	325.5	325.9	323.2	317.2	310.3	304.4	299.7
25,0°	305.4	299.2	294.2	291.7	291.4	293.2	296.0	298.2	301.8	306.7	311.3	312.8	311.0	307.2	303.7
27,5°	326.8	314.7	302.3	291.6	283.8	281.8	281.0	282.7	286.5	292.4	300.1	307.7	312.2	312.5	310.8
30,0°	358.5	347.3	334.9	320.1	303.0	290.1	280.6	277.6	279.6	284.8	292.6	302.7	312.5	317.9	318.4
32,5°	390.1	383.0	373.1	358.2	338.8	317.9	298.9	286.6	282.2	285.6	293.9	304.9	316.5	325.1	327.2
35,0°	412.8	410.5	403.1	389.5	370.8	350.0	328.9	311.1	300.6	300.7	308.4	318.5	328.0	335.2	336.5
37,5°	427.9	427.9	422.2	411.3	397.0	383.4	368.5	354.5	342.9	336.3	335.0	337.3	340.2	343.0	343.2
40,0°	436.3	435.4	431.9	430.4	432.0	428.5	419.2	404.4	384.6	363.9	348.8	341.9	339.9	340.5	341.6
42,5°	444.8	449.7	458.7	466.4	467.2	458.0	443.8	422.6	395.1	366.9	344.4	333.2	333.2	338.3	344.5
45,0°	471.7	478.6	481.0	478.9	471.1	456.3	436.7	412.4	386.5	362.1	342.3	332.2	333.6	340.1	345.4
46,0°	481.0	485.1	483.6	476.8	465.0	448.9	429.3	406.9	383.5	360.9	341.8	330.6	329.9	335.0	339.0
47,0°	488.2	488.4	481.5	469.7	455.5	440.6	422.2	401.8	380.0	358.3	338.8	325.5	322.2	325.4	327.7
48,0°	491.2	487.6	477.3	463.5	448.9	433.2	415.5	395.8	374.3	352.4	331.6	315.9	309.3	310.1	309.7
49,0°	491.2	484.0	471.7	457.6	443.2	426.9	408.4	387.8	365.0	342.1	319.7	302.0	292.3	290.6	287.7
50,0°	489.0	479.4	467.2	453.6	437.9	419.4	398.5	375.6	350.3	326.0	302.0	283.0	270.0	266.4	260.2
51,0°	485.7	476.5	465.0	451.1	433.6	410.2	385.4	358.9	331.0	304.9	280.3	259.6	244.7	238.2	231.8
52,0°	482.0	475.5	463.8	447.0	425.1	397.5	367.6	337.4	307.2	280.3	255.6	234.8	218.9	211.2	203.0
53,0°	479.7	476.0	463.1	442.4	415.1	380.2	344.6	311.1	279.6	252.5	228.2	207.9	191.7	182.3	171.4
54,0°	479.7	477.0	462.4	437.7	404.0	360.0	320.0	284.8	253.0	226.4	202.9	183.2	167.5	156.5	144.4
55,0°	482.0	478.2	458.5	424.8	380.3	334.6	292.3	256.3	224.8	199.1	176.9	158.5	143.4	132.2	120.7
56,0°	485.2	478.1	452.2	409.3	358.0	306.7	262.7	226.2	194.9	170.2	149.7	133.5	120.7	111.0	100.4
57,0°	488.5	475.9	439.7	388.7	331.1	279.3	234.3	198.3	167.4	144.5	126.3	113.0	100.6	89.9	79.7
58,0°	490.7	468.6	421.3	362.1	301.7	250.7	205.4	170.2	140.2	120.1	103.6	91.9	79.0	71.2	63.9
59,0°	491.3	459.3	402.7	339.0	277.5	222.8	178.0	143.6	116.0	97.5	83.3	73.4	65.0	59.6	55.0
60,0°	487.7	441.4	375.6	308.4	246.1	194.9	151.0	118.8	94.3	79.1	69.2	62.4	56.3	52.0	48.7
61,0°	479.5	421.8	350.5	281.6	219.5	167.3	125.1	96.3	76.4	65.2	58.8	54.5	50.1	46.7	44.1
62,0°	468.6	402.1	327.6	257.9	195.2	142.7	104.1	79.5	63.7	55.8	52.5	50.0	46.6	43.5	41.4
63,0°	448.5	374.0	296.7	225.8	163.9	119.3	86.3	65.8	53.8	49.6	48.7	47.1	44.1	41.2	39.2
64,0°	429.0	349.4	271.4	199.8	140.1	98.8	71.3	54.6	46.9	45.4	45.5	44.1	41.5	38.9	37.1
65,0°	402.8	321.3	240.0	172.2	116.0	81.9	59.2	47.3	42.7	42.3	42.5	41.0	38.8	36.7	35.0
66,0°	374.2	289.5	209.3	142.9	95.4	67.0	49.8	42.3	39.4	39.3	39.5	38.2	36.0	34.5	32.9
67,0°	348.9	262.5	182.0	120.9	79.2	54.9	43.5	39.0	36.7	36.5	36.6	35.3	33.4	31.9	30.7
68,0°	315.2	226.5	148.9	95.5	60.6	45.7	39.2	36.5	34.4	34.0	33.9	32.9	31.3	30.0	28.8
69,0°	286.1	195.6	124.1	76.6	49.3	39.1	35.9	34.3	32.0	31.4	31.7	30.8	29.0	27.9	26.9
70,0°	252.1	165.7	100.4	61.6	41.0	35.0	33.3	32.4	29.9	29.3	29.7	28.9	27.5	26.7	25.6
71,0°	217.4	134.7	78.5	47.2	34.4	31.5	30.7	30.2	27.6	27.1	27.2	26.7	26.0	25.8	24.9
72,0°	185.4	111.2	61.4	37.3	29.8	28.3	28.1	27.9	25.7	24.9	25.0	24.6	24.6	24.6	23.7

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	319.6	320.3	320.4	320.5	320.5	320.5	320.6	307.4	306.6	305.7	304.9	304.1	303.3	302.5	301.7
5,0°	332.8	332.3	332.4	332.0	331.9	331.9	331.6	315.8	314.0	312.2	310.1	308.0	305.9	303.8	301.9
7,5°	335.8	334.8	333.9	333.1	332.6	332.3	332.2	330.4	326.4	322.7	319.0	315.0	311.1	307.1	303.3
10,0°	329.4	327.9	326.6	325.5	324.6	324.0	324.0	344.4	337.6	331.0	325.0	318.7	312.8	307.1	301.5
12,5°	322.6	320.6	318.8	317.3	316.2	315.1	315.2	355.2	345.5	336.4	327.9	320.0	312.5	305.2	298.1
15,0°	314.3	311.8	309.6	307.8	306.3	305.1	304.9	362.8	351.5	341.2	332.3	324.8	316.4	308.1	300.0
17,5°	305.0	302.1	299.6	297.6	296.0	294.8	294.4	354.5	342.5	332.0	323.3	317.1	310.9	305.2	300.2
20,0°	297.9	294.7	292.3	290.3	288.9	288.1	287.9	335.9	322.0	310.8	299.8	290.8	282.7	277.5	271.8
22,5°	296.0	293.1	291.0	289.7	289.0	288.8	288.7	326.1	311.7	297.9	284.1	271.1	259.0	247.9	233.0
25,0°	301.4	299.9	298.7	298.2	298.3	298.6	298.5	331.2	315.9	298.6	280.3	260.1	239.3	214.6	187.6
27,5°	309.2	308.4	307.6	307.3	307.4	307.9	308.1	352.2	335.4	315.0	292.1	266.2	235.2	197.2	161.6
30,0°	316.8	315.7	314.8	314.1	313.7	314.0	314.4	369.6	351.6	329.1	302.6	270.7	231.0	186.0	152.9
32,5°	324.4	321.1	318.5	316.5	314.9	313.8	313.7	373.3	352.9	327.9	297.7	258.9	212.1	170.0	147.0
35,0°	331.2	324.6	319.6	316.2	313.4	311.3	310.4	368.2	343.5	314.5	279.1	233.0	183.4	152.3	139.8
37,5°	337.4	328.9	322.2	317.9	314.9	312.6	311.5	360.8	330.0	296.2	252.7	199.6	157.7	138.7	135.4
40,0°	338.4	330.6	323.8	319.3	316.4	314.6	314.1	353.5	315.8	275.9	222.7	168.6	137.6	131.2	131.7
42,5°	346.2	341.7	336.4	334.0	332.2	332.0	331.2	344.6	299.7	250.6	190.5	143.5	126.1	125.5	126.0
45,0°	346.9	342.5	338.3	336.3	336.6	336.8	336.9	331.8	280.5	222.3	160.9	124.3	117.0	118.3	120.2
46,0°	339.6	335.3	331.8	330.6	331.5	331.7	332.1	325.1	271.5	210.7	150.4	118.6	112.9	114.5	117.0
47,0°	327.4	323.1	320.0	318.5	319.7	320.3	321.0	317.3	261.5	198.6	140.4	113.4	110.0	112.1	114.3
48,0°	307.8	302.7	300.0	298.5	300.0	300.0	301.7	309.5	251.7	187.5	132.0	108.8	106.5	109.3	110.9
49,0°	284.6	279.0	276.1	273.5	275.2	274.7	277.1	300.8	240.9	176.0	124.1	104.0	102.1	106.3	107.7
50,0°	257.2	248.9	247.1	241.0	245.0	241.1	247.2	291.3	229.9	164.9	116.7	99.4	98.7	103.4	104.4
51,0°	226.1	216.8	210.7	203.9	204.2	201.1	204.1	282.2	219.2	154.6	110.0	95.2	94.9	99.8	100.4
52,0°	193.4	178.9	171.2	163.6	163.7	160.8	162.9	272.2	207.9	144.5	103.2	91.0	93.1	96.9	96.8
53,0°	157.3	142.6	134.9	129.0	128.7	127.0	127.7	263.1	197.8	135.9	96.6	85.8	92.5	96.3	93.9
54,0°	130.0	116.6	110.4	106.6	106.7	105.2	105.6	254.0	187.8	127.7	89.8	77.9	80.9	90.3	91.2
55,0°	108.7	98.6	93.6	90.3	89.8	87.9	88.4	244.5	177.7	119.9	83.7	70.6	70.0	78.2	84.8
56,0°	89.1	79.9	76.0	73.7	73.4	71.8	72.5	235.9	169.1	113.3	79.2	66.5	65.4	69.3	74.6
57,0°	72.1	66.7	64.0	62.7	62.6	61.2	61.9	227.6	160.9	107.2	75.1	63.5	62.8	65.3	67.5
58,0°	60.4	56.6	55.5	54.6	55.0	53.2	54.3	219.6	153.6	101.8	71.4	60.9	60.8	63.2	64.6
59,0°	52.4	50.1	49.2	48.8	48.9	47.7	48.1	212.3	147.1	97.1	68.2	58.8	58.8	61.2	61.8
60,0°	47.0	45.2	44.5	44.8	44.8	44.1	44.0	205.1	140.7	92.5	65.1	56.9	57.3	59.5	59.6
61,0°	42.9	41.8	41.6	42.3	42.2	41.9	41.9	199.1	135.3	88.4	62.4	55.3	56.1	58.0	57.6
62,0°	40.5	39.5	39.5	40.3	40.4	40.0	40.0	193.8	130.0	83.9	59.4	53.5	54.7	56.4	55.3
63,0°	38.4	37.5	37.5	38.5	38.4	38.2	38.0	187.8	122.6	77.5	55.7	51.3	53.3	54.9	53.4
64,0°	36.3	35.5	35.7	36.4	36.5	36.1	36.1	181.9	113.9	70.4	51.9	48.9	51.1	52.7	51.1
65,0°	34.3	33.6	33.9	34.5	35.1	34.1	33.8	175.7	105.1	64.0	48.3	46.1	48.2	50.1	48.5
66,0°	32.4	31.8	32.3	32.9	33.2	31.9	31.8	171.5	98.8	59.6	45.2	43.6	46.1	47.8	46.3
67,0°	30.3	30.3	30.8	31.0	30.7	29.6	29.7	169.3	95.0	56.0	42.3	41.1	43.1	44.2	42.4
68,0°	28.5	28.7	29.1	29.0	28.2	27.5	27.6	168.9	92.3	52.6	39.2	38.3	40.7	42.0	39.7
69,0°	26.8	26.9	26.8	26.3	25.7	25.3	25.3	171.0	91.1	49.7	36.5	35.5	37.7	38.4	36.7
70,0°	25.3	25.0	24.5	23.8	23.4	23.1	23.2	176.6	91.3	46.9	33.6	32.5	34.1	34.8	33.4
71,0°	24.0	23.1	22.3	21.5	21.3	20.8	21.2	187.1	93.6	44.6	30.8	29.5	30.4	31.1	29.9
72,0°	22.6	21.5	20.5	19.7	19.2	18.9	19.6	202.6	97.4	43.4	29.6	27.0	26.6	27.3	26.5

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	300.8	300.0	299.2	298.5	297.9	297.2	296.6	295.6	295.1	294.7	293.9	293.0	292.2	291.8	291.4
5,0°	299.9	297.9	295.8	293.9	292.0	290.0	288.1	286.3	285.1	283.1	281.6	279.9	278.1	276.7	275.1
7,5°	299.3	295.5	291.9	288.2	284.6	281.2	277.8	274.5	271.1	268.5	265.5	262.6	259.7	257.0	254.2
10,0°	295.8	290.5	285.1	279.9	274.8	269.7	264.6	259.6	254.3	250.9	245.7	240.6	235.0	228.9	224.1
12,5°	291.1	284.9	278.4	271.7	264.4	256.9	248.5	239.9	230.8	221.7	212.5	203.3	196.6	189.1	183.5
15,0°	292.0	284.1	275.3	264.8	252.6	239.9	227.6	215.3	204.7	194.9	185.8	179.6	174.4	169.4	164.7
17,5°	294.8	286.5	271.0	256.3	241.4	227.2	214.9	204.5	195.6	187.5	180.0	172.4	165.0	157.9	151.1
20,0°	265.4	252.3	241.8	231.6	225.4	220.0	214.3	206.8	197.1	186.1	175.0	164.1	154.5	146.3	139.3
22,5°	216.2	200.7	193.5	192.2	193.9	195.8	196.1	193.8	188.2	179.8	170.0	159.5	149.6	141.1	134.0
25,0°	165.2	153.2	152.2	156.0	159.5	162.5	164.3	165.4	165.1	163.0	158.6	152.3	144.9	136.3	127.5
27,5°	137.8	126.7	123.1	123.9	126.3	131.0	136.3	140.1	141.1	140.2	138.4	135.9	131.3	124.8	117.9
30,0°	135.2	125.1	117.8	113.7	111.8	112.0	113.5	115.5	117.7	119.5	119.7	119.0	115.4	109.3	103.7
32,5°	135.3	128.6	124.1	119.1	114.6	109.5	105.2	102.3	101.4	101.5	101.2	98.6	96.3	94.2	91.4
35,0°	135.5	132.2	127.1	121.5	115.0	108.7	102.7	96.5	90.3	85.3	82.4	80.7	79.5	77.8	76.5
37,5°	134.1	130.4	125.7	118.9	112.1	105.3	96.7	86.7	78.5	73.7	71.1	68.9	68.4	69.0	69.6
40,0°	130.1	126.5	120.3	113.5	106.7	96.5	84.8	76.1	70.8	67.4	65.0	63.4	62.6	62.7	63.7
42,5°	125.1	120.2	113.4	106.5	95.6	83.2	74.7	69.7	66.3	63.3	60.9	59.2	58.7	59.0	59.8
45,0°	118.4	112.1	106.0	95.2	82.0	72.8	67.7	64.4	61.8	59.8	58.1	57.0	56.4	56.3	56.7
46,0°	114.6	108.5	101.3	89.3	77.1	69.3	65.0	62.2	60.2	58.6	57.3	56.4	55.7	55.4	55.7
47,0°	111.3	105.7	97.0	83.9	72.7	66.2	62.5	60.2	58.7	57.5	56.6	55.8	55.2	54.8	54.8
48,0°	107.4	101.8	92.1	78.9	69.0	63.5	60.4	58.6	57.5	56.6	55.8	55.2	54.6	54.2	54.1
49,0°	103.6	97.5	86.4	73.8	65.4	60.9	58.5	57.2	56.4	55.7	55.1	54.5	53.9	53.5	53.4
50,0°	100.6	93.7	81.6	69.5	62.3	58.6	56.9	56.0	55.4	54.8	54.3	53.9	53.3	52.9	52.7
51,0°	97.0	89.0	76.0	65.2	59.5	56.7	55.5	54.8	54.3	53.9	53.5	53.1	52.6	52.2	52.1
52,0°	93.4	84.5	71.3	61.6	57.1	55.1	54.2	53.7	53.3	53.0	52.7	52.3	51.9	51.5	51.4
53,0°	89.7	80.2	67.1	58.7	55.3	53.8	53.0	52.6	52.3	52.1	51.8	51.6	51.2	50.8	50.7
54,0°	85.9	74.6	62.3	55.9	53.6	52.4	51.8	51.5	51.3	51.1	50.8	50.6	50.3	50.1	49.9
55,0°	82.0	70.0	58.6	53.7	52.0	51.1	50.6	50.4	50.3	50.1	49.9	49.7	49.5	49.4	49.2
56,0°	75.1	65.9	56.0	52.0	50.6	49.8	49.3	49.2	49.1	49.1	48.9	48.9	48.8	48.7	48.3
57,0°	66.5	59.5	53.1	50.4	49.2	48.5	48.1	48.0	47.9	47.9	47.9	47.9	47.8	47.8	47.5
58,0°	61.1	53.8	50.2	48.9	47.8	47.2	46.9	46.7	46.6	46.6	46.9	46.9	46.8	46.8	46.7
59,0°	56.8	48.9	46.3	46.6	46.5	46.1	45.7	45.5	45.4	45.6	45.8	45.7	45.7	45.7	45.6
60,0°	54.0	46.5	43.7	44.1	45.1	44.9	44.5	44.2	44.2	44.4	44.6	44.7	44.6	44.7	44.6
61,0°	51.6	44.9	42.4	42.5	43.8	43.7	43.4	43.1	43.1	43.3	43.4	43.5	43.4	43.6	43.5
62,0°	49.0	43.3	41.2	41.4	42.6	42.5	42.2	41.9	41.8	42.0	42.1	42.1	42.1	42.2	42.2
63,0°	46.9	41.9	40.4	40.8	41.5	41.3	41.0	40.8	40.6	40.7	40.8	40.8	40.8	41.0	41.0
64,0°	44.9	40.6	39.6	40.4	40.5	40.1	39.9	39.7	39.4	39.4	39.3	39.5	39.4	39.6	39.5
65,0°	42.5	39.2	38.8	39.7	39.4	38.9	38.6	38.5	38.1	38.0	37.9	38.1	38.0	38.0	38.1
66,0°	40.7	38.1	37.7	38.7	38.3	37.7	37.4	37.2	36.8	36.5	36.4	36.6	36.4	36.5	36.7
67,0°	38.0	36.5	36.4	37.4	37.0	36.4	36.1	35.8	35.3	35.0	34.8	34.8	34.6	34.6	34.8
68,0°	35.8	34.9	35.5	36.0	35.5	34.9	34.6	34.3	33.7	33.3	33.0	33.0	32.9	33.0	33.3
69,0°	33.4	33.3	34.5	34.8	34.0	33.3	33.0	32.7	32.1	31.6	31.2	31.2	31.1	31.2	31.5
70,0°	30.8	31.0	32.7	33.0	32.4	31.6	31.1	30.8	30.2	29.8	29.4	29.6	29.5	29.2	29.5
71,0°	28.2	28.5	30.3	31.0	30.4	29.5	29.0	28.6	28.1	27.8	27.5	27.8	27.4	27.1	27.0
72,0°	25.4	25.9	27.1	28.0	28.0	27.2	26.5	26.2	25.9	25.8	25.6	25.6	24.8	24.6	24.4

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	0.5	0.5
2,5°	290.8	290.1	289.6	289.3	289.0	288.5	288.4	288.3	287.9	287.7	287.4	287.7	288.1	3.7	4.1
5,0°	273.6	272.1	271.1	269.8	268.7	268.1	267.1	266.4	265.9	265.5	265.0	264.7	264.9	7.4	11.5
7,5°	251.6	249.3	246.8	244.8	242.7	240.9	239.3	237.8	236.7	235.9	235.1	234.5	234.5	11.1	22.6
10,0°	218.0	213.6	208.8	204.6	200.9	197.3	194.4	192.0	189.7	188.2	187.0	185.9	186.6	14.5	37.1
12,5°	178.2	173.7	169.8	166.3	163.3	160.7	158.3	156.5	154.8	153.6	152.7	151.8	152.0	17.8	54.9
15,0°	160.0	155.3	150.9	146.8	143.0	139.8	136.9	134.5	132.5	130.9	129.8	128.9	129.1	21.1	76.0
17,5°	144.9	139.3	134.3	129.9	126.2	123.0	120.3	118.0	116.2	114.9	114.0	113.4	113.1	23.8	99.8
20,0°	133.8	129.3	125.2	121.6	118.0	114.8	111.8	109.2	107.1	105.4	104.5	103.6	103.8	25.4	125.2
22,5°	127.8	122.2	116.9	112.2	107.9	104.1	100.9	98.2	96.1	94.5	93.5	92.8	92.7	26.5	151.7
25,0°	119.2	111.8	105.9	102.0	99.3	97.4	95.6	93.7	91.7	89.9	88.7	87.8	87.7	28.0	179.7
27,5°	110.9	104.4	98.6	94.1	90.8	88.5	86.9	85.7	84.7	83.6	82.8	82.1	82.0	30.5	210.3
30,0°	99.1	95.5	92.2	88.3	83.2	78.3	74.9	72.7	71.4	70.3	69.7	69.2	69.0	33.5	243.8
32,5°	87.0	82.3	78.2	75.1	72.7	70.9	69.5	68.4	67.5	66.7	66.3	65.8	65.8	36.6	280.4
35,0°	75.5	74.4	72.8	70.8	69.0	67.5	66.4	65.6	64.9	64.3	64.0	63.5	63.3	39.5	319.9
37,5°	69.5	69.0	68.6	67.9	66.9	65.9	64.9	63.9	63.0	62.2	61.5	60.9	60.6	42.5	362.5
40,0°	64.9	65.5	65.7	65.4	64.7	63.4	62.3	61.2	60.5	59.7	59.0	58.2	58.2	45.4	407.9
42,5°	60.9	61.9	62.3	62.1	61.7	61.0	60.3	59.7	58.9	58.1	57.1	56.4	56.2	48.1	456.0
45,0°	57.5	58.4	59.2	59.4	59.0	58.3	57.8	57.3	56.8	55.9	55.0	54.1	53.8	34.8	490.8
46,0°	56.4	57.3	57.9	57.9	57.7	57.4	57.3	56.9	56.2	55.4	54.4	53.5	53.2	20.1	510.9
47,0°	55.3	56.2	56.9	57.0	57.0	57.0	56.9	56.4	55.7	54.7	53.6	52.7	52.5	20.2	531.1
48,0°	54.4	55.1	55.9	56.3	56.5	56.5	56.3	55.9	55.3	54.1	53.0	52.0	51.8	20.1	551.2
49,0°	53.6	54.2	55.1	55.7	55.8	55.9	55.8	55.3	54.6	53.3	52.1	51.1	50.9	19.9	571.2
50,0°	52.9	53.5	54.4	55.1	55.4	55.4	55.3	54.7	53.9	52.6	51.3	50.2	49.9	19.6	590.8
51,0°	52.3	52.7	53.6	54.3	54.9	54.9	54.7	54.0	52.9	51.8	50.4	49.1	48.8	19.2	610.1
52,0°	51.6	52.1	52.8	53.8	54.4	54.3	54.0	53.1	52.1	50.8	49.2	48.0	47.6	18.7	628.8
53,0°	50.9	51.4	52.2	53.0	53.6	53.6	53.2	52.3	51.1	49.8	48.2	46.8	46.3	18.2	647.0
54,0°	49.9	50.4	51.4	52.1	52.6	52.7	52.4	51.4	50.0	48.6	47.1	45.7	45.1	17.8	664.8
55,0°	49.2	49.8	50.6	51.3	51.8	51.7	51.5	50.5	49.1	47.5	46.0	44.5	44.2	17.3	682.1
56,0°	48.3	48.8	49.6	50.4	50.9	50.8	50.3	49.3	48.1	46.3	45.0	43.4	43.0	16.8	698.9
57,0°	47.4	47.7	48.6	49.5	50.0	49.8	49.0	48.1	46.7	45.2	43.8	42.5	41.9	16.4	715.3
58,0°	46.5	46.5	47.3	48.3	49.1	48.7	47.9	46.8	45.4	44.0	42.8	41.5	41.0	16.0	731.4
59,0°	45.2	45.2	45.8	46.7	47.6	47.5	46.6	45.4	44.0	42.7	41.5	40.5	40.0	15.7	747.1
60,0°	44.3	43.9	44.3	45.3	46.2	46.1	45.4	44.4	42.8	41.3	40.3	39.5	39.4	15.4	762.5
61,0°	43.1	42.6	42.8	43.8	44.7	44.8	44.3	43.4	41.7	40.0	38.9	38.3	38.4	15.2	777.6
62,0°	41.8	41.3	41.3	42.0	42.9	43.0	42.6	41.8	40.1	38.2	37.3	36.7	36.8	15.0	792.6
63,0°	40.7	40.3	40.1	40.3	41.4	41.4	40.9	39.9	38.2	36.6	35.8	35.3	35.4	14.7	807.4
64,0°	39.5	39.1	38.9	38.9	39.5	39.1	38.8	37.6	36.3	34.7	34.2	33.8	34.1	14.5	821.9
65,0°	38.2	38.2	37.9	37.4	37.3	36.9	36.5	35.4	34.4	32.7	32.3	31.9	32.2	14.3	836.2
66,0°	37.1	37.2	37.0	35.8	35.1	34.2	33.7	33.0	32.3	31.0	30.3	29.9	30.4	14.1	850.3
67,0°	35.6	35.7	35.0	33.4	32.1	31.3	31.1	30.6	30.2	28.9	28.0	27.5	27.8	13.9	864.2
68,0°	34.0	33.8	32.8	31.4	30.1	28.9	28.7	28.0	27.6	26.1	25.7	25.3	25.3	13.7	877.8
69,0°	32.1	31.4	30.9	29.4	28.0	26.1	25.9	25.2	25.1	24.0	23.6	22.7	23.0	13.6	891.4
70,0°	29.5	29.5	28.8	27.2	25.5	23.5	22.8	22.7	22.0	22.2	21.4	20.4	20.5	13.6	905.0
71,0°	27.2	27.6	26.8	24.9	22.8	20.5	19.6	20.5	19.3	20.7	18.9	18.0	18.0	13.6	918.6
72,0°	25.0	24.9	24.4	21.7	20.0	17.7	16.6	17.6	17.3	17.0	15.7	15.0	15.2	13.7	932.3

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	---------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	344.9	447.8	507.5	542.8	561.4	567.1	553.8	566.9	600.3	650.6	660.7	591.8	477.7	349.1	231.2
74,0°	352.2	458.6	518.1	551.3	570.9	574.4	557.7	575.6	615.5	657.3	646.7	555.6	425.9	295.7	179.8
75,0°	324.1	422.3	480.5	511.8	538.1	546.6	531.6	556.8	602.4	629.9	604.7	507.1	371.5	222.9	117.1
76,0°	241.2	309.5	358.5	381.0	417.1	439.4	460.2	496.0	545.8	557.7	526.9	433.9	295.2	139.9	62.5
77,0°	150.2	185.1	212.0	226.8	258.3	284.6	344.4	387.7	438.0	439.6	413.4	330.6	209.0	86.4	36.0
78,0°	84.0	97.0	114.3	117.0	139.8	156.0	222.4	262.1	304.9	299.8	280.3	205.9	112.3	39.9	21.4
79,0°	37.7	43.8	50.1	53.9	65.3	79.2	127.4	158.4	188.8	180.6	159.4	96.4	35.5	15.5	12.4
80,0°	17.0	18.5	20.7	22.2	26.3	31.9	62.5	81.1	99.6	98.2	78.1	38.2	14.5	10.2	9.7
81,0°	8.6	9.0	9.8	10.7	12.1	13.9	26.2	30.6	37.9	40.4	30.7	14.9	8.5	7.6	7.4
82,0°	5.8	6.0	6.4	7.0	7.6	7.8	11.4	11.1	12.4	14.5	10.7	7.1	6.0	5.9	5.6
83,0°	4.4	4.4	4.8	5.1	5.4	5.5	6.2	6.0	6.5	7.5	6.5	5.0	4.4	4.7	4.9
84,0°	3.1	3.1	3.3	3.3	3.6	3.5	3.9	3.8	4.1	4.4	4.3	3.6	3.1	3.2	3.3
85,0°	2.4	2.4	2.5	2.5	2.5	2.3	2.6	2.5	2.7	2.8	2.8	2.5	2.4	2.3	2.5
86,0°	2.0	1.8	2.0	1.8	1.8	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.6	1.5	1.6
87,0°	1.5	1.5	1.5	1.3	1.3	1.3	1.4	1.3	1.3	1.2	1.3	1.1	1.0	1.0	1.0
88,0°	1.3	1.3	1.2	1.0	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.7	0.8	0.8
89,0°	1.0	1.0	1.0	1.1	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	--------------------------------



C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	140.1	81.8	45.1	29.6	25.7	25.7	25.8	26.0	24.1	23.0	23.0	22.6	22.9	23.0	21.9
74,0°	96.0	52.5	31.7	24.5	22.9	23.3	23.6	24.0	22.8	21.6	21.4	21.0	21.1	20.8	20.1
75,0°	55.3	31.2	23.0	22.8	22.9	22.2	22.0	22.2	21.4	20.5	20.1	19.8	19.3	19.1	18.4
76,0°	30.4	20.5	18.7	21.3	23.3	22.2	21.7	20.9	19.6	18.9	18.2	17.9	17.3	17.2	16.5
77,0°	20.8	16.4	15.8	16.5	18.3	20.6	21.0	20.0	18.0	17.2	16.2	15.8	15.0	14.9	14.3
78,0°	15.1	13.2	12.9	13.7	14.4	16.9	18.0	18.2	16.9	15.8	14.6	13.9	12.7	12.6	11.8
79,0°	11.2	10.6	10.6	11.5	12.5	13.4	14.0	14.9	14.5	14.0	12.5	11.7	10.5	10.4	9.3
80,0°	8.9	8.4	8.6	9.5	10.0	10.8	10.8	11.1	11.2	11.5	10.8	9.9	8.5	8.2	7.3
81,0°	6.8	6.5	7.1	7.8	7.8	8.3	8.2	8.2	8.5	9.1	9.0	8.5	6.8	6.3	5.7
82,0°	5.5	5.0	5.3	5.9	6.2	6.2	6.2	6.3	6.5	7.2	7.4	6.8	5.3	4.7	4.3
83,0°	4.3	4.2	4.4	4.6	4.2	4.5	4.6	4.7	4.8	5.5	5.6	5.1	4.0	3.6	3.4
84,0°	3.3	3.1	3.4	3.3	2.9	3.1	3.0	3.3	3.5	3.8	4.0	3.7	2.9	2.7	2.5
85,0°	2.3	2.3	2.6	2.1	2.1	2.1	2.0	2.2	2.2	2.6	2.5	2.4	2.0	1.9	1.8
86,0°	1.4	1.8	1.6	1.6	1.2	1.4	1.4	1.5	1.3	1.5	1.4	1.5	1.4	1.4	1.2
87,0°	0.9	0.9	1.1	1.0	1.0	1.0	0.9	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.8
88,0°	0.9	0.9	0.5	0.7	0.6	0.7	0.7	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
89,0°	0.5	0.5	0.5	0.4	0.8	0.5	0.5	0.5	0.6	0.5	0.5	0.4	0.4	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	--------------------------------



C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	20.8	19.7	18.6	17.8	17.2	17.1	17.7	216.1	98.5	42.3	30.5	26.5	24.3	24.2	23.5
74,0°	19.3	18.2	17.0	16.1	15.5	15.3	15.6	214.2	91.6	39.1	30.0	26.7	24.1	22.1	21.4
75,0°	18.0	16.8	15.6	14.5	13.9	13.6	13.6	185.3	74.2	32.2	26.2	24.3	21.8	19.5	18.6
76,0°	16.5	15.2	14.0	12.9	12.2	11.7	11.7	124.9	46.9	23.2	21.4	20.5	18.5	17.2	16.3
77,0°	14.2	12.9	12.0	10.9	10.2	9.7	9.7	73.0	28.3	18.2	17.7	17.2	15.9	14.9	14.4
78,0°	11.9	10.7	10.0	9.2	8.6	7.9	8.1	38.9	19.9	17.5	15.1	14.4	13.1	12.4	12.3
79,0°	9.7	8.5	8.3	7.6	7.2	6.4	6.7	19.9	14.6	16.2	12.7	11.9	11.5	11.0	10.5
80,0°	7.5	6.9	6.4	6.0	5.6	5.1	5.1	11.3	10.3	11.9	9.8	9.5	9.3	8.9	8.6
81,0°	5.9	5.5	5.1	4.7	4.5	4.0	4.1	7.3	7.0	7.5	7.1	7.3	7.1	7.1	6.8
82,0°	4.5	4.1	3.9	3.8	3.6	3.2	3.2	5.4	5.4	5.4	5.5	5.7	5.7	5.6	5.5
83,0°	3.3	3.1	3.0	2.9	2.8	2.5	2.5	4.2	4.3	4.2	4.3	4.3	4.0	4.1	4.2
84,0°	2.4	2.3	2.2	2.2	2.1	2.0	2.1	3.1	3.3	3.2	3.3	3.2	3.3	3.1	3.0
85,0°	1.8	1.6	1.5	1.5	1.5	1.4	1.4	2.4	2.6	2.5	2.6	2.6	2.4	2.4	2.6
86,0°	1.2	1.0	1.0	1.0	1.0	0.9	0.9	1.9	2.0	1.9	2.0	1.9	1.8	1.9	1.8
87,0°	0.8	0.8	0.8	0.7	0.7	0.6	0.7	1.5	1.6	1.6	1.6	1.6	1.5	1.3	1.4
88,0°	0.6	0.6	0.5	0.3	0.5	0.3	0.5	1.3	1.3	1.3	1.3	1.3	1.4	1.3	1.1
89,0°	0.3	0.3	0.3	0.3	0.3	0.2	0.2	1.0	1.1	1.1	1.1	1.1	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	22.9	23.6	24.3	25.3	25.5	24.7	24.1	23.8	23.5	23.5	23.4	23.3	22.1	22.2	22.5
74,0°	20.7	21.3	22.0	22.9	23.0	22.4	21.7	21.3	20.9	20.9	20.7	20.3	20.2	20.5	20.9
75,0°	18.0	18.1	18.8	20.0	20.4	20.0	19.2	18.7	18.2	18.0	17.7	17.8	18.2	19.2	19.4
76,0°	15.9	15.9	16.3	17.2	17.6	17.5	16.6	16.2	15.5	15.1	15.0	15.5	15.7	16.3	16.9
77,0°	13.5	13.6	13.5	14.5	14.9	15.1	14.1	13.7	13.0	12.7	12.4	12.4	12.1	13.0	13.8
78,0°	12.0	11.5	11.5	11.9	12.3	12.7	11.7	11.3	10.6	10.3	10.0	9.7	9.7	10.2	10.5
79,0°	10.2	9.9	9.7	9.9	10.3	10.5	9.6	9.2	8.6	8.2	7.9	7.9	7.8	8.0	8.0
80,0°	8.3	8.3	7.9	7.9	8.4	8.4	7.8	7.5	6.9	6.5	6.2	5.9	5.7	5.9	6.0
81,0°	6.8	6.5	6.5	6.4	6.6	6.7	6.3	5.9	5.4	5.0	4.7	4.5	4.2	4.3	4.4
82,0°	5.4	5.3	5.0	5.2	5.4	5.3	5.0	4.7	4.2	3.8	3.5	3.3	3.0	3.1	3.1
83,0°	3.8	4.0	3.8	3.9	4.2	4.2	3.9	3.5	3.1	2.8	2.6	2.4	2.3	2.3	2.0
84,0°	3.1	2.9	2.9	2.9	3.1	3.1	2.9	2.5	2.2	2.0	1.9	1.8	1.6	1.6	1.5
85,0°	2.3	2.2	2.0	2.0	2.2	2.2	2.0	1.8	1.5	1.4	1.3	1.2	1.1	1.1	0.8
86,0°	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.1	1.1	1.0	0.8	0.8	0.7	0.7
87,0°	1.4	1.4	1.4	1.4	1.3	1.1	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.6	0.6
88,0°	1.1	1.1	1.0	1.1	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.6	0.6	0.6
89,0°	0.9	1.0	1.2	0.8	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	22.9	22.8	21.9	18.7	16.7	14.7	13.4	13.8	14.1	11.9	11.6	11.3	11.7	13.7	945.9
74,0°	21.2	20.7	19.7	15.9	12.8	11.1	10.4	10.6	11.1	9.0	8.6	8.3	8.5	13.2	959.1
75,0°	19.7	18.6	17.3	13.8	10.6	9.1	8.7	8.2	8.7	7.3	7.1	6.5	6.7	12.1	971.3
76,0°	17.0	15.9	14.3	11.8	9.5	7.7	7.2	6.5	6.7	5.4	5.0	4.6	4.6	9.9	981.2
77,0°	14.2	12.9	11.3	8.6	7.1	6.0	5.9	4.8	4.4	3.7	3.2	2.8	3.0	7.2	988.4
78,0°	11.1	10.3	9.0	6.9	5.4	4.5	4.0	3.4	2.9	2.3	1.8	1.6	1.6	4.6	993.0
79,0°	8.5	8.0	7.4	5.5	4.2	3.6	3.1	2.4	2.1	1.5	1.2	0.9	0.9	2.7	995.7
80,0°	6.3	5.8	5.5	4.3	3.3	2.7	2.2	1.8	1.5	1.0	0.7	0.7	0.5	1.6	997.3
81,0°	4.4	4.3	4.1	3.0	2.4	2.0	1.6	1.5	1.0	0.7	0.6	0.5	0.5	0.9	998.2
82,0°	3.0	3.0	3.2	2.2	1.8	1.4	1.2	1.0	0.9	0.5	0.5	0.5	0.5	0.6	998.7
83,0°	1.9	2.0	1.9	1.4	1.2	0.9	0.9	0.8	0.7	0.5	0.5	0.2	0.2	0.4	999.1
84,0°	1.4	1.7	1.2	0.9	0.8	0.7	0.7	0.6	0.5	0.5	0.2	0.2	0.2	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.7
87,0°	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.9
89,0°	0.6	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5110	39.1	40.8	40.0
95	238	252	4852	36.6	38.1	37.4
90	223	249	4602	34.2	35.7	35.0
85	208	247	4345	31.9	33.3	32.6
80	193	244	4082	29.7	30.9	30.3
75	179	241	3831	27.5	28.6	28.0
70	165	238	3575	25.4	26.5	26.0
65	152	235	3329	23.4	24.4	23.9
60	138	232	3060	21.3	22.2	21.8
55	125	228	2804	19.4	20.2	19.8
50	113	224	2562	17.7	18.4	18.0
45	100	220	2294	15.8	16.5	16.2
40	88	215	2041	14.1	14.6	14.4
35	76	210	1783	12.4	12.9	12.6
30	65	204	1541	10.8	11.2	11.0
25	53	197	1272	9.2	9.5	9.4
20	42	188	1021	7.7	7.8	7.8
15	31	177	765	6.1	6.3	6.2
12	24	168	600	5.1	5.3	5.2

Dimming levels table

environmental temperature: 5°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5230	39.6	41.3	40.4
95	239	252	4976	37.2	38.8	38.0
90	223	249	4699	34.7	36.1	35.4
85	209	247	4451	32.5	33.9	33.2
80	194	244	4180	30.1	31.5	30.8
75	180	241	3920	28.0	29.1	28.6
70	166	238	3656	25.9	27.0	26.4
65	153	235	3404	24.0	24.9	24.4
60	139	232	3128	21.8	22.7	22.2
55	126	228	2866	19.9	20.7	20.3
50	114	225	2620	18.1	18.9	18.5
45	101	220	2347	16.2	16.8	16.5
40	89	216	2090	14.5	15.0	14.8
35	77	210	1827	12.8	13.2	13.0
30	65	204	1559	11.0	11.4	11.2
25	54	197	1310	9.4	9.8	9.6
20	43	189	1055	7.9	8.2	8.0
15	31	177	773	6.2	6.4	6.3
12	24	168	606	5.2	5.4	5.3

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	--------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5180	39.3	41.0	40.2
95	238	252	4915	36.8	38.3	37.6
90	223	249	4660	34.4	35.9	35.2
85	208	247	4398	32.1	33.5	32.8
80	194	244	4148	29.9	31.3	30.6
75	180	241	3893	27.8	28.9	28.4
70	166	238	3631	25.7	26.8	26.2
65	152	235	3363	23.6	24.6	24.1
60	139	232	3109	21.7	22.5	22.1
55	126	228	2851	19.8	20.5	20.2
50	113	224	2585	17.8	18.5	18.2
45	101	220	2336	16.0	16.7	16.4
40	89	216	2080	14.3	14.9	14.6
35	77	210	1819	12.7	13.1	12.9
30	65	204	1553	10.9	11.3	11.1
25	54	197	1305	9.4	9.7	9.6
20	42	188	1028	7.7	7.9	7.8
15	31	177	770	6.2	6.4	6.3
12	24	168	604	5.2	5.3	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5B37N08DB EAN: 4058352896969	LP number 59065_1123
--	--	---------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	5110.0	39.1
5.0	5230.0	39.6
15.0	5180.0	39.3