
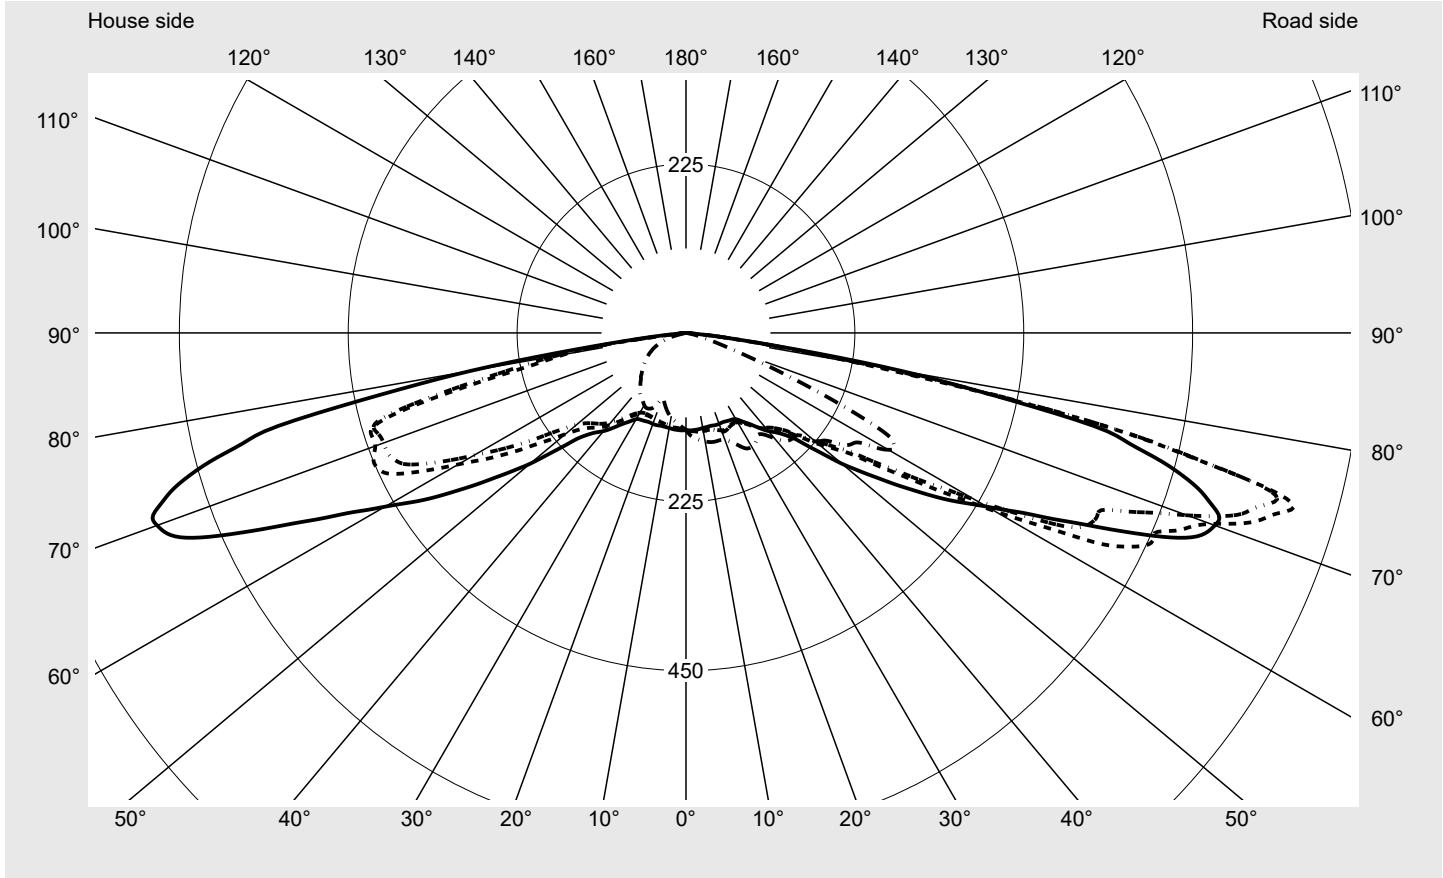


# Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
	<b>Version</b> post-top or side-entry mounting, NEMA 7 pin (DALI) <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG-DALI Plus <b>Rated values</b> Net luminous flux = 20180 lm Power consumption = 147.0 W Luminous efficacy = 137.3 lm/W	<b>serial documentation</b> <b>16.06.2023</b>



**Luminous intensity in cd/klm** C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 842 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	---
Imax 70°	827.2
Imax 80°	295.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
---	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 74°**    **KMK 73°**    **KMK 72°**    **KMK 71°**      **siteco**

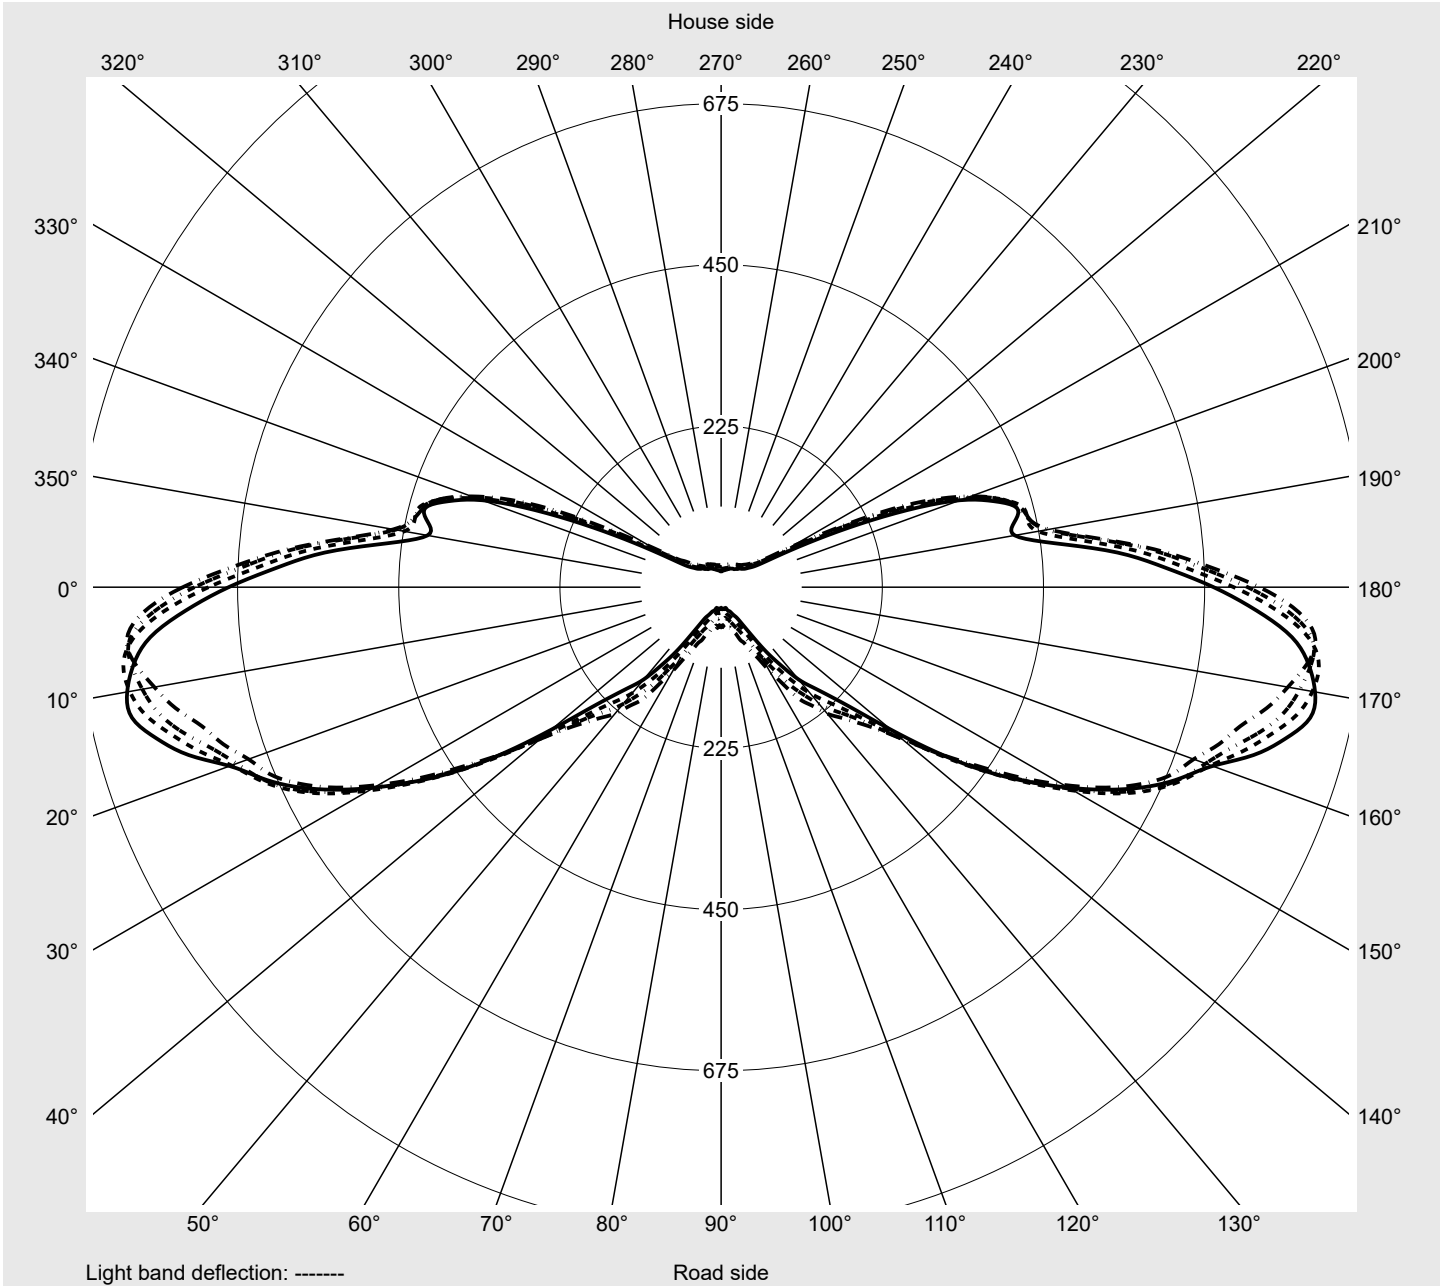

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	130.0	130.1	130.3	130.6	130.7	130.9	131.0	130.9	131.2	131.5	131.5	131.5	132.1	132.1	132.4
5,0°	129.8	130.2	130.2	130.3	130.9	131.5	131.5	132.7	132.7	132.3	133.9	133.9	133.9	133.9	133.9
7,5°	129.5	129.7	130.7	130.9	131.7	132.7	133.3	133.3	133.7	134.3	134.5	134.7	135.0	135.7	136.1
10,0°	128.7	129.4	130.3	131.2	131.8	132.9	133.5	133.4	134.1	134.5	135.0	135.6	135.9	136.5	137.0
12,5°	128.3	129.3	130.4	131.1	131.8	132.7	133.2	134.1	134.3	135.2	136.1	137.1	137.8	138.3	138.8
15,0°	128.1	129.8	131.2	131.9	132.4	133.5	133.6	134.9	135.7	137.1	138.3	139.0	139.8	140.4	141.4
17,5°	128.9	130.6	131.8	133.0	134.2	135.3	136.5	137.9	139.2	140.4	141.6	142.9	143.8	144.6	145.3
20,0°	129.0	131.1	133.1	134.7	136.9	138.3	140.4	142.3	143.6	144.7	145.7	146.7	147.5	148.3	149.5
22,5°	128.7	131.0	133.3	135.2	136.9	138.7	140.4	142.6	144.5	146.0	147.6	149.4	150.9	151.8	152.9
25,0°	129.5	131.5	133.4	134.4	135.5	136.8	137.9	139.1	141.8	144.2	146.7	149.1	151.4	154.4	156.5
27,5°	130.5	131.6	132.2	133.1	134.0	135.3	136.5	138.4	139.6	142.3	143.9	146.5	149.4	152.2	155.3
30,0°	132.7	133.8	134.2	135.4	136.5	136.4	137.5	138.9	139.5	141.3	142.6	144.2	145.6	148.3	152.2
32,5°	139.9	140.6	141.8	141.7	142.3	142.3	143.1	143.2	143.3	143.7	144.3	144.6	145.6	147.1	149.6
35,0°	148.3	149.2	149.7	150.8	151.6	150.5	149.9	150.7	150.4	149.4	148.7	147.3	146.8	147.3	149.2
37,5°	159.3	159.5	159.2	159.1	159.8	159.1	158.7	157.5	156.7	156.1	154.6	152.1	150.4	149.6	150.3
40,0°	170.7	169.7	168.2	167.0	166.3	166.1	164.9	163.2	161.8	160.8	159.4	157.5	155.7	153.6	151.4
42,5°	180.4	178.2	176.3	175.2	174.5	173.0	171.5	169.7	168.1	166.8	165.3	163.3	160.7	157.4	154.6
45,0°	195.4	192.7	189.9	187.8	186.5	185.0	182.8	181.1	178.8	176.6	173.8	169.4	164.9	161.5	157.9
46,0°	204.7	201.7	198.4	195.6	193.6	191.9	189.0	185.3	182.7	181.6	178.3	173.1	168.0	164.1	160.1
47,0°	219.1	215.1	210.6	206.8	203.4	200.3	197.7	194.3	190.5	187.5	183.4	177.4	171.8	167.6	163.2
48,0°	234.4	230.0	224.1	218.4	213.3	209.0	205.0	201.2	197.3	193.9	189.1	182.7	176.9	171.9	167.3
49,0°	252.0	247.1	240.5	232.8	226.0	219.8	214.6	210.1	205.5	201.0	195.7	189.1	182.6	177.0	171.9
50,0°	271.2	264.6	255.6	247.1	238.2	230.4	225.0	220.1	214.4	209.3	203.8	197.4	189.9	183.4	177.7
51,0°	287.4	280.4	270.8	259.5	248.1	239.5	233.6	228.7	222.9	218.5	213.2	206.8	198.2	191.4	186.0
52,0°	304.5	297.1	286.3	273.6	260.8	250.5	243.4	238.2	233.8	229.2	223.6	217.4	209.0	201.2	194.9
53,0°	322.3	314.6	303.6	289.0	273.2	262.0	255.3	249.7	245.0	241.4	235.7	229.6	222.1	214.4	206.3
54,0°	342.2	335.0	324.1	309.5	293.1	277.6	267.5	261.7	259.3	254.8	249.3	243.3	235.8	228.6	220.1
55,0°	361.7	356.4	346.0	333.0	318.1	302.6	289.6	281.4	276.4	271.0	265.2	258.5	250.4	243.4	235.7
56,0°	382.5	379.8	370.6	357.3	342.9	328.9	314.5	302.8	296.4	289.5	282.4	275.5	267.1	259.6	252.5
57,0°	403.7	407.8	402.4	392.4	374.9	358.8	341.0	329.3	318.1	309.3	300.0	292.1	283.2	275.7	267.0
58,0°	423.5	433.3	435.7	429.9	414.5	395.0	373.7	354.8	341.7	330.8	319.4	310.1	299.6	290.0	279.1
59,0°	442.1	458.9	465.8	463.5	452.4	431.7	404.3	382.4	366.8	352.5	338.5	326.1	312.5	300.3	288.5
60,0°	463.0	490.9	504.4	507.6	495.8	474.9	446.0	419.5	393.9	374.5	355.5	337.7	320.7	307.7	296.3
61,0°	486.8	523.8	544.1	550.3	537.9	517.7	486.6	453.7	419.9	393.1	368.4	346.4	327.0	313.1	304.0
62,0°	511.8	557.2	585.4	594.8	585.8	564.0	529.0	487.6	440.2	404.5	374.4	350.2	330.9	319.6	313.7
63,0°	544.5	595.1	624.1	641.8	640.8	617.8	568.0	510.4	453.0	410.8	378.0	355.4	339.2	331.7	326.8
64,0°	577.3	628.9	664.7	682.7	679.6	649.5	588.8	519.2	459.0	416.7	385.9	368.8	357.9	354.0	348.8
65,0°	616.2	672.3	706.3	726.2	715.2	671.5	596.9	519.9	464.8	429.9	405.1	393.4	383.3	378.5	366.7
66,0°	656.9	717.8	753.3	761.9	740.6	680.6	599.8	526.4	481.3	456.0	435.9	426.7	414.0	403.3	384.1
67,0°	696.5	765.3	796.9	790.2	747.7	680.0	603.4	543.4	510.0	491.9	476.9	467.3	447.0	426.5	400.2
68,0°	726.8	796.6	823.4	802.1	760.5	703.3	635.5	585.5	553.5	541.2	527.7	511.3	480.9	451.4	414.7
69,0°	742.6	807.9	826.0	806.4	771.3	720.6	668.9	639.2	610.6	599.9	580.0	553.5	514.6	471.5	422.7
70,0°	749.8	808.5	827.2	810.6	776.0	744.0	710.5	696.5	664.9	649.0	621.1	584.0	536.6	484.6	426.9
71,0°	751.5	807.4	832.7	824.7	803.3	780.0	750.1	728.7	702.0	681.9	649.2	605.7	551.9	494.1	433.6
72,0°	735.1	793.2	828.5	830.5	820.5	805.5	779.4	746.5	719.8	696.3	664.7	619.2	562.9	502.4	441.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	132.3	132.2	132.2	132.3	132.6	132.7	133.2	133.0	133.0	132.8	133.3	133.1	133.7	133.7	133.7
5,0°	134.2	134.6	135.0	134.6	135.2	135.3	135.7	136.2	136.3	136.8	137.3	137.4	137.8	138.2	138.8
7,5°	136.4	136.5	136.8	137.0	137.5	137.7	138.4	138.4	138.7	139.1	139.8	140.6	141.3	141.4	142.0
10,0°	137.6	137.7	138.4	138.8	139.3	140.0	139.9	141.0	141.0	140.9	142.3	142.9	144.0	144.6	144.9
12,5°	139.1	139.7	140.6	140.9	141.8	141.8	142.8	143.2	144.0	144.6	145.4	146.0	146.5	147.2	147.8
15,0°	141.7	142.7	143.5	144.3	144.5	145.1	145.7	146.4	146.5	146.8	148.2	148.2	149.0	149.0	149.0
17,5°	146.1	146.6	147.2	147.7	148.1	148.6	148.5	148.9	149.5	150.1	150.8	150.7	150.7	151.1	151.3
20,0°	150.4	151.0	152.0	152.3	152.2	152.0	152.7	152.7	152.7	153.1	153.8	153.7	154.3	154.4	154.4
22,5°	154.1	155.3	155.7	156.2	156.2	156.7	156.6	156.5	156.8	157.0	157.6	158.1	158.2	158.3	157.9
25,0°	158.4	159.8	160.4	160.8	160.8	161.8	161.1	161.5	162.8	163.5	164.6	165.9	165.4	165.3	165.2
27,5°	159.5	163.1	166.1	167.3	168.0	169.5	170.4	171.8	173.6	174.8	175.7	176.0	175.2	174.3	173.7
30,0°	157.8	163.8	170.1	175.4	179.1	181.2	182.8	183.3	184.4	186.1	186.5	185.3	182.1	179.7	179.5
32,5°	153.9	160.6	170.5	179.7	187.5	190.4	189.8	189.2	189.4	190.3	188.6	183.3	178.1	175.1	174.2
35,0°	153.4	159.2	166.6	176.2	185.1	190.5	189.9	186.6	184.1	183.4	181.2	176.9	173.5	170.8	169.7
37,5°	152.5	156.6	160.8	166.3	174.1	178.7	179.7	178.1	177.7	179.6	179.4	176.0	173.8	173.6	173.7
40,0°	150.7	152.6	156.2	158.0	160.9	166.4	172.0	175.8	178.3	180.1	181.2	182.6	185.0	186.8	187.8
42,5°	152.1	151.1	151.9	153.3	155.1	161.2	170.5	179.1	186.4	191.2	196.2	200.4	204.9	207.1	208.8
45,0°	154.4	152.4	151.4	152.2	154.4	161.2	173.9	187.8	197.9	206.4	214.4	219.2	220.4	221.0	220.6
46,0°	156.8	154.2	152.3	152.0	154.4	162.3	176.9	191.9	203.0	212.3	219.3	223.7	225.6	226.0	224.2
47,0°	159.3	155.9	153.5	152.9	155.4	163.2	179.7	196.9	208.7	216.6	223.5	227.8	229.7	229.5	227.0
48,0°	162.9	158.3	154.9	154.4	156.9	164.8	182.8	202.5	214.9	223.0	227.9	230.8	232.1	232.7	229.7
49,0°	167.0	161.6	157.6	156.5	158.6	167.3	186.6	205.1	218.0	227.9	233.7	235.2	235.5	232.7	227.4
50,0°	172.4	166.7	162.1	159.8	162.8	172.1	192.5	210.8	222.3	232.5	240.2	238.7	237.0	231.9	231.0
51,0°	179.5	173.2	168.4	165.8	167.9	178.2	199.4	217.3	228.7	242.7	247.0	242.8	240.7	239.5	240.4
52,0°	188.3	181.1	176.5	174.3	175.4	185.6	206.8	225.7	234.5	250.3	256.2	250.7	251.3	251.7	252.5
53,0°	199.1	192.5	187.3	184.8	187.3	197.4	216.4	234.3	243.1	255.2	262.6	261.0	261.3	261.6	259.5
54,0°	211.4	204.1	198.1	194.7	197.2	207.8	225.6	243.6	252.2	263.2	267.6	265.3	265.7	263.2	265.7
55,0°	225.6	216.7	210.3	205.8	207.3	217.9	235.7	253.0	260.3	267.9	267.4	266.0	264.8	268.9	272.9
56,0°	242.9	231.7	222.7	215.8	216.2	226.9	245.2	260.0	265.8	271.7	267.4	266.6	272.6	279.8	285.0
57,0°	256.6	242.7	230.7	222.5	224.4	237.4	256.6	270.0	275.0	276.9	273.4	278.4	287.1	293.0	294.1
58,0°	267.0	252.5	239.5	231.6	236.3	249.1	269.9	282.1	286.2	286.1	284.8	290.5	296.1	296.1	292.3
59,0°	275.1	261.5	251.5	246.7	251.1	265.1	284.7	293.7	293.8	291.6	290.8	291.7	291.7	287.0	280.5
60,0°	284.0	273.4	267.4	262.1	264.9	275.2	289.6	297.1	293.2	288.3	287.8	283.3	276.8	271.4	267.0
61,0°	295.2	288.3	282.9	276.8	275.2	283.2	292.3	296.7	291.1	284.7	275.8	264.0	256.0	253.0	248.6
62,0°	307.9	303.5	296.1	285.9	281.2	285.6	290.8	294.6	287.8	273.9	253.1	243.4	235.4	229.8	229.9
63,0°	325.0	318.0	303.9	290.6	283.2	285.9	289.3	289.9	273.7	253.6	233.3	221.8	211.9	211.9	209.1
64,0°	341.2	326.9	309.7	293.8	283.9	282.3	281.1	274.7	256.7	235.3	211.7	199.1	193.4	193.6	191.7
65,0°	352.8	333.3	312.2	294.7	281.7	276.4	271.5	261.8	241.0	218.1	194.4	183.9	179.8	185.1	187.2
66,0°	364.1	339.0	312.0	291.3	277.3	269.7	260.5	247.6	227.0	205.5	183.8	172.3	175.8	179.9	177.1
67,0°	372.5	340.2	309.8	288.3	273.9	261.1	249.4	234.9	216.6	195.2	174.3	169.9	169.0	168.7	160.7
68,0°	376.6	339.3	307.3	284.1	267.4	254.8	240.2	224.7	206.7	187.2	169.8	160.5	156.2	150.6	140.6
69,0°	378.0	337.0	303.1	279.7	261.4	248.2	230.0	216.2	197.6	177.5	156.8	143.5	133.4	125.9	112.3
70,0°	379.0	333.2	296.9	274.0	256.2	241.0	221.8	206.9	185.4	161.6	136.5	122.6	110.2	100.6	89.2
71,0°	380.2	329.5	291.8	266.6	246.9	230.4	208.3	190.5	159.5	134.8	111.8	98.3	84.6	78.5	68.0
72,0°	380.9	328.8	285.3	254.5	233.9	212.8	189.2	165.6	135.3	111.5	87.8	75.3	65.1	59.8	54.3

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	134.2	134.8	135.3	136.1	136.5	137.3	136.6	129.9	129.8	129.6	129.0	128.7	128.7	128.7	128.4
5,0°	139.4	140.0	140.1	140.7	141.4	140.9	140.7	129.5	129.1	128.7	128.3	127.4	127.4	126.6	126.8
7,5°	142.7	143.2	143.2	143.9	143.7	143.7	144.0	129.0	128.6	128.0	127.5	127.0	126.6	125.7	125.6
10,0°	146.5	146.2	146.2	146.6	146.9	147.1	146.8	127.8	127.1	126.8	126.3	125.9	125.2	124.3	123.7
12,5°	148.2	148.4	148.7	148.9	148.9	148.9	149.0	127.2	126.3	125.7	125.1	124.8	124.1	123.1	122.4
15,0°	149.6	149.6	149.8	149.9	149.2	150.1	149.9	126.9	125.7	124.8	124.4	123.7	122.8	121.6	121.8
17,5°	151.3	150.9	150.9	150.4	149.9	149.7	149.9	127.6	126.1	124.9	124.4	123.3	122.3	121.4	121.0
20,0°	153.6	152.6	151.9	151.5	151.4	151.1	151.7	127.5	125.9	124.5	123.3	122.4	121.4	120.7	119.9
22,5°	157.5	157.1	156.5	157.0	156.5	156.9	157.3	126.8	125.2	123.7	122.4	121.5	120.5	119.7	118.7
25,0°	165.1	164.2	164.7	165.5	165.0	165.5	165.2	127.3	125.4	123.8	122.5	121.3	120.1	118.6	117.2
27,5°	173.5	173.9	173.5	173.8	173.0	173.2	173.5	128.5	126.7	124.9	123.5	122.2	120.4	118.8	116.5
30,0°	178.9	177.7	177.0	176.3	176.8	176.0	175.1	131.7	130.5	128.3	126.4	125.1	122.8	120.4	118.1
32,5°	173.5	173.0	173.0	172.8	172.9	173.2	172.6	138.3	137.1	134.9	133.2	130.6	128.0	125.0	122.1
35,0°	170.0	168.9	167.3	167.4	167.1	167.1	166.5	147.9	146.5	144.5	141.9	139.4	136.1	132.2	128.5
37,5°	173.7	173.6	173.2	172.2	171.0	170.3	170.8	158.6	157.7	155.9	153.3	149.6	145.3	140.1	134.5
40,0°	188.8	190.4	190.0	187.7	185.1	185.5	183.1	170.8	170.5	168.8	165.4	160.8	155.4	148.2	140.3
42,5°	208.1	208.2	205.7	202.0	198.6	196.9	195.3	181.9	182.1	180.4	176.3	170.9	164.1	156.0	146.3
45,0°	219.8	219.1	211.9	206.8	202.3	200.3	199.6	196.8	195.8	192.1	185.9	178.7	170.7	161.6	149.9
46,0°	221.6	220.1	215.8	208.2	203.8	199.4	200.2	206.7	205.1	199.7	191.3	182.5	173.3	163.8	151.7
47,0°	225.1	220.0	216.5	208.6	202.4	199.4	200.9	220.4	217.5	209.6	198.4	187.1	176.4	166.0	153.5
48,0°	223.8	218.1	213.4	208.7	205.1	202.2	203.9	234.7	230.7	220.8	207.0	193.0	179.9	168.1	155.3
49,0°	225.4	221.9	218.0	215.3	213.6	213.8	211.3	252.4	247.3	235.2	218.0	200.6	184.6	170.9	156.9
50,0°	232.0	238.3	229.2	229.7	226.0	226.3	221.1	271.6	265.3	251.0	230.9	209.9	190.4	174.0	158.7
51,0°	245.9	254.8	243.7	239.2	234.6	232.2	229.1	288.6	281.5	265.8	244.0	220.5	197.9	178.4	160.7
52,0°	254.1	264.9	251.3	239.5	233.7	227.4	232.8	305.6	297.9	280.8	257.0	232.1	207.7	185.3	163.7
53,0°	260.6	268.5	258.6	250.6	245.3	241.8	240.2	323.0	314.0	295.0	269.5	243.8	218.8	194.4	170.5
54,0°	266.7	278.9	272.6	264.4	256.2	255.8	251.2	341.5	330.2	309.8	283.5	257.6	232.3	206.3	180.8
55,0°	279.0	284.8	282.6	277.9	267.3	266.0	260.4	358.0	344.1	323.7	298.3	273.1	248.0	220.9	192.8
56,0°	285.5	286.4	287.4	277.1	267.9	263.3	265.4	375.9	358.3	336.6	311.7	287.8	263.3	236.6	208.1
57,0°	292.4	287.8	284.1	272.9	266.3	263.3	268.4	393.0	371.9	349.2	325.6	303.1	278.7	252.5	226.6
58,0°	290.7	286.3	291.3	294.4	283.6	280.5	277.6	407.6	384.4	360.6	339.4	318.3	294.1	267.9	240.5
59,0°	278.7	278.8	289.0	302.1	302.5	298.0	297.9	419.7	394.1	371.3	352.6	333.1	309.5	284.0	258.1
60,0°	267.7	269.5	280.0	297.0	305.9	315.0	311.4	434.3	407.6	387.1	369.0	350.3	326.4	301.1	274.3
61,0°	249.9	252.8	265.4	286.0	308.3	317.7	317.6	450.6	421.7	403.7	387.6	370.0	345.0	318.0	288.7
62,0°	232.5	233.4	247.8	271.2	300.1	311.6	313.3	469.5	435.9	420.6	407.3	389.8	363.8	334.8	303.1
63,0°	210.5	214.1	229.5	256.6	289.2	307.1	304.1	497.2	456.6	439.8	427.7	409.9	382.2	351.1	315.1
64,0°	195.8	207.8	221.2	242.0	263.9	272.6	274.0	528.6	481.2	461.4	447.0	428.4	399.5	366.6	330.4
65,0°	193.0	195.0	200.9	209.0	222.4	228.7	232.2	566.7	509.6	482.8	462.0	441.7	413.6	380.6	343.9
66,0°	177.8	172.4	177.5	174.8	187.2	183.4	191.0	603.0	538.5	500.4	472.0	447.3	421.0	391.8	356.2
67,0°	155.5	148.8	147.2	145.6	152.3	149.9	152.3	631.8	566.0	518.3	478.9	450.1	425.8	400.5	365.3
68,0°	134.7	124.7	122.6	119.0	124.7	116.2	119.8	650.9	578.9	525.3	480.4	449.2	428.4	406.4	370.4
69,0°	104.5	96.5	91.9	88.9	92.3	87.9	93.4	662.8	586.6	524.4	475.2	444.8	428.8	409.6	374.1
70,0°	83.3	75.7	73.2	70.2	72.7	68.8	71.9	672.8	595.5	524.6	468.0	440.6	428.8	410.5	374.4
71,0°	64.9	58.0	57.5	54.0	57.0	53.2	55.9	678.9	607.0	526.4	464.7	439.8	429.5	409.7	370.6
72,0°	50.2	46.0	45.0	43.0	44.2	42.7	44.2	666.3	601.5	522.2	461.6	440.6	432.1	409.2	367.4

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	128.2	128.1	127.8	127.7	127.7	127.5	127.1	126.8	126.6	126.3	126.2	126.1	126.1	126.0	125.9
5,0°	126.9	126.5	125.9	125.4	125.4	125.3	124.9	124.4	123.9	123.9	123.5	123.2	122.8	122.5	122.5
7,5°	125.3	125.1	124.3	124.0	123.3	122.7	122.2	122.1	121.8	121.1	120.9	120.8	120.4	119.9	119.8
10,0°	123.9	122.6	121.8	121.7	121.7	121.0	120.4	120.1	119.7	119.7	119.6	119.1	118.5	118.3	117.8
12,5°	121.9	121.3	121.1	120.8	120.4	119.8	119.5	118.9	118.6	118.2	117.5	117.1	116.4	115.5	114.8
15,0°	120.4	120.6	119.3	119.3	118.7	118.6	118.2	117.2	116.3	115.7	115.0	114.2	113.2	112.3	111.2
17,5°	120.0	119.1	118.6	118.0	117.4	116.7	116.0	115.2	113.8	112.7	111.6	110.4	109.5	108.1	106.6
20,0°	118.6	118.1	117.7	116.7	115.9	114.6	113.4	112.2	110.8	109.1	107.7	105.8	104.0	102.0	100.2
22,5°	117.5	116.5	115.7	114.4	113.0	111.8	110.5	108.6	106.5	104.3	101.8	99.6	97.4	95.1	93.6
25,0°	116.1	114.9	113.7	112.6	111.4	108.9	106.4	104.0	100.4	97.8	94.9	92.8	91.3	89.7	88.7
27,5°	115.2	113.4	112.3	109.9	107.3	104.3	101.2	97.9	94.8	92.2	90.0	88.4	88.1	90.2	93.8
30,0°	115.2	113.9	110.3	107.0	103.4	99.8	95.6	92.7	89.8	88.1	87.1	89.4	93.5	98.4	103.7
32,5°	118.0	114.2	110.0	104.6	99.4	94.9	91.6	88.5	86.5	86.6	90.0	95.5	101.2	107.9	114.2
35,0°	123.1	117.2	109.8	102.4	96.5	91.5	87.3	85.2	85.9	89.2	94.5	101.0	107.7	114.2	119.5
37,5°	127.1	117.8	108.4	99.9	92.7	87.3	84.5	85.1	87.9	92.2	97.5	103.5	109.5	114.9	118.3
40,0°	130.1	117.6	106.1	95.9	88.2	84.0	84.2	87.3	91.0	94.3	98.5	103.2	107.5	110.8	111.7
42,5°	132.3	116.1	101.5	90.8	84.7	83.6	86.1	89.5	92.7	95.8	98.8	101.4	103.7	105.2	104.8
45,0°	132.9	113.6	97.6	87.9	84.7	86.1	88.9	91.1	93.2	95.3	97.0	98.4	99.1	98.8	97.5
46,0°	134.1	113.8	96.8	87.3	84.8	86.9	89.6	91.1	92.6	94.0	95.2	95.9	96.8	96.5	94.4
47,0°	135.5	114.2	96.4	87.2	86.1	88.2	89.9	91.1	92.1	92.5	93.4	93.9	94.3	93.7	91.4
48,0°	137.4	115.7	97.1	87.7	86.9	89.1	90.5	90.9	91.1	91.4	91.5	91.8	91.6	90.7	88.6
49,0°	139.2	117.5	98.4	88.8	88.0	90.1	90.7	90.3	90.0	89.5	89.6	89.7	89.0	87.9	85.9
50,0°	141.5	119.5	100.2	90.7	89.5	90.7	90.4	89.7	89.0	87.5	87.1	87.1	86.3	85.0	83.0
51,0°	142.6	122.1	103.3	92.8	91.3	92.2	91.0	89.6	87.8	85.9	84.5	84.0	82.7	81.4	80.3
52,0°	145.6	124.9	106.1	95.7	92.9	92.7	91.4	89.7	87.2	83.9	82.1	81.6	80.3	79.0	77.8
53,0°	149.7	128.4	109.4	98.4	95.5	94.1	91.8	89.3	86.0	82.5	80.1	79.3	78.2	76.7	75.5
54,0°	157.7	133.1	112.5	101.5	98.4	95.7	92.5	89.5	85.0	80.6	78.2	77.1	75.5	74.6	73.3
55,0°	166.4	140.2	117.6	104.4	99.6	96.3	92.6	88.2	83.2	78.6	75.7	74.3	73.2	72.3	70.9
56,0°	180.6	149.8	123.8	108.2	102.4	97.5	92.1	87.3	81.3	76.6	74.2	72.5	71.4	70.5	69.1
57,0°	197.8	164.1	133.4	112.4	104.1	97.9	91.6	85.5	79.5	74.6	72.0	70.6	69.4	68.6	66.8
58,0°	211.8	176.2	141.8	118.6	107.4	99.2	90.7	83.5	77.3	72.8	70.1	68.7	67.2	66.6	65.0
59,0°	228.1	190.9	153.0	125.5	110.3	99.6	90.0	82.2	75.5	71.0	68.4	66.8	65.1	64.4	63.2
60,0°	241.7	202.9	163.5	131.9	112.8	99.5	89.2	80.6	74.1	69.3	66.9	64.9	63.0	62.6	61.2
61,0°	255.1	213.4	172.0	139.1	117.1	100.1	87.3	78.2	72.0	68.0	65.1	63.1	61.4	60.5	59.0
62,0°	265.6	221.5	179.9	146.1	120.7	100.3	85.7	77.0	70.2	66.2	63.2	60.8	59.1	58.2	57.3
63,0°	274.1	228.8	185.4	149.5	121.3	99.4	84.2	74.2	68.4	64.3	61.3	59.0	57.2	56.1	55.7
64,0°	285.8	234.4	188.6	149.9	121.0	98.2	81.5	72.4	66.6	62.5	59.5	57.1	55.3	54.1	53.3
65,0°	294.0	239.3	189.9	149.1	116.5	94.6	79.2	70.0	64.2	60.2	57.6	55.3	53.5	52.2	51.1
66,0°	301.8	245.3	191.8	146.3	112.3	90.2	75.9	67.7	61.9	58.3	55.4	53.4	51.6	50.4	49.2
67,0°	310.4	249.2	190.8	139.6	105.4	85.2	72.3	64.4	60.1	56.4	53.4	51.0	49.3	48.6	47.5
68,0°	314.4	251.7	188.5	134.1	99.3	80.0	69.0	61.9	57.0	53.5	51.0	49.1	47.3	46.8	45.9
69,0°	318.7	252.9	183.3	127.5	92.5	76.0	64.9	58.2	53.6	50.9	48.0	46.5	44.4	44.6	43.3
70,0°	319.5	253.1	176.2	117.9	84.0	70.4	60.8	54.6	49.9	47.3	44.9	43.5	41.9	41.5	40.3
71,0°	318.7	249.1	168.2	110.7	75.1	64.1	56.1	50.5	46.9	44.4	42.0	40.6	39.3	38.6	37.4
72,0°	310.0	234.4	154.0	98.2	68.0	57.4	50.8	47.1	44.6	42.6	40.2	38.1	36.5	36.2	35.1

# Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> 59080_613
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	0.2	0.2
2,5°	125.8	125.7	125.6	125.6	125.5	125.5	125.4	125.3	125.3	125.3	125.3	125.3	125.3	1.6	1.7
5,0°	122.3	122.2	122.0	121.7	121.5	121.4	121.4	121.3	121.1	121.0	121.0	121.0	121.0	3.1	4.8
7,5°	119.5	119.4	119.2	119.1	118.7	118.0	118.0	118.0	118.0	118.0	117.9	117.9	117.9	4.6	9.5
10,0°	117.2	116.8	116.5	116.1	115.6	115.3	114.8	114.8	114.6	114.3	114.3	114.3	114.3	6.2	15.7
12,5°	114.2	113.6	112.6	112.3	111.6	111.2	110.7	110.4	110.0	109.5	109.4	109.3	109.3	7.7	23.3
15,0°	110.2	109.4	108.5	107.6	106.7	105.9	105.3	104.8	104.3	103.8	103.5	103.2	103.2	9.1	32.4
17,5°	105.0	103.8	102.4	101.3	100.2	99.2	98.4	97.6	97.1	96.8	96.9	96.2	96.4	10.6	43.0
20,0°	98.5	97.2	95.7	94.6	93.8	93.3	93.1	93.2	93.4	93.8	94.3	94.6	93.4	12.0	55.0
22,5°	92.4	91.4	91.0	91.6	93.2	95.2	97.4	99.6	101.2	103.2	104.0	104.7	105.0	13.6	68.6
25,0°	89.4	92.0	95.3	98.4	101.6	104.5	106.4	108.0	109.2	110.0	110.6	110.9	111.2	15.2	83.8
27,5°	97.9	102.1	105.9	109.0	111.2	112.5	113.3	113.5	113.5	113.5	113.3	113.0	113.0	17.0	100.7
30,0°	108.8	113.0	116.2	118.3	118.8	118.2	117.2	115.8	114.3	112.9	111.7	111.2	111.2	18.8	119.5
32,5°	118.5	121.1	122.0	121.4	119.9	118.2	115.9	113.3	110.8	109.2	107.8	107.2	107.2	20.4	139.9
35,0°	122.3	122.7	121.1	118.6	115.7	112.5	109.5	107.0	105.3	104.4	103.8	103.8	103.8	21.9	161.7
37,5°	118.4	116.4	113.4	109.6	106.4	103.8	102.0	100.7	100.3	99.9	100.0	100.1	100.4	23.4	185.1
40,0°	110.4	107.1	103.5	100.0	98.4	96.7	95.8	95.3	95.2	94.7	95.2	94.6	94.6	25.1	210.2
42,5°	102.7	99.2	96.2	94.3	92.6	91.2	90.6	89.9	90.0	89.6	89.5	89.2	89.7	27.1	237.3
45,0°	95.4	92.8	90.7	88.7	87.4	86.1	85.7	85.4	84.8	84.8	84.5	84.5	84.8	20.3	257.5
46,0°	92.3	89.9	88.4	86.8	85.3	84.1	83.6	83.2	82.7	82.6	82.6	82.6	83.5	12.0	269.6
47,0°	89.6	87.7	86.2	84.5	83.2	82.3	81.4	81.2	81.1	80.8	81.1	81.1	81.1	12.4	282.0
48,0°	87.0	85.2	83.9	81.8	81.1	79.9	79.3	79.0	79.2	78.7	79.3	79.2	79.2	12.8	294.8
49,0°	84.3	82.9	81.6	79.7	79.1	77.7	77.2	77.2	77.1	76.8	77.1	77.4	77.4	13.4	308.2
50,0°	81.8	80.2	79.0	77.7	77.4	75.9	75.3	75.1	75.3	75.0	75.3	75.9	75.6	14.0	322.2
51,0°	79.4	78.1	76.5	75.6	75.0	74.1	73.5	73.2	73.4	73.2	73.7	73.7	73.7	14.6	336.8
52,0°	77.0	76.0	74.9	73.8	72.9	72.2	71.6	71.4	71.6	71.6	71.9	71.9	71.9	15.3	352.1
53,0°	74.6	73.9	73.3	71.7	71.0	70.3	69.5	69.5	69.8	69.8	70.0	70.3	70.0	16.1	368.2
54,0°	72.3	71.3	71.3	69.8	69.2	68.5	67.6	67.7	67.9	67.9	68.2	68.2	68.2	17.0	385.2
55,0°	70.3	69.4	69.0	68.0	67.6	66.7	65.8	65.3	65.8	66.1	66.3	66.0	66.3	17.9	403.1
56,0°	68.0	67.5	66.8	66.0	65.8	64.6	63.9	63.3	63.6	63.9	64.5	64.2	64.5	18.8	422.0
57,0°	65.7	65.5	64.9	63.7	63.4	62.5	62.4	61.5	61.8	61.8	62.4	62.7	62.7	19.9	441.8
58,0°	63.8	63.3	63.0	61.9	61.2	60.3	60.0	59.4	59.7	59.9	60.2	60.8	60.8	21.0	462.8
59,0°	62.0	61.4	61.0	59.8	59.1	58.1	57.5	57.2	57.5	57.8	58.4	58.7	59.0	22.0	484.8
60,0°	60.1	59.3	58.7	57.6	56.9	56.0	55.6	55.1	55.4	55.9	56.5	56.8	57.1	23.0	507.8
61,0°	58.2	57.3	56.7	55.5	54.8	53.8	53.5	52.9	53.2	54.1	54.4	54.7	55.3	23.8	531.6
62,0°	56.4	55.5	54.3	53.3	52.6	51.7	51.3	50.8	51.3	51.7	52.2	52.8	52.8	24.5	556.1
63,0°	54.5	53.3	52.1	51.2	50.5	49.3	49.2	48.9	49.2	49.5	50.1	51.0	51.0	25.2	581.3
64,0°	52.7	51.2	50.0	48.8	48.3	47.1	47.1	46.8	47.0	47.4	48.2	48.8	49.1	25.7	607.0
65,0°	50.6	49.0	47.9	46.8	46.5	45.5	45.2	44.6	45.2	45.2	46.1	46.7	46.7	26.2	633.2
66,0°	48.4	47.0	46.5	45.1	44.6	43.8	43.3	42.5	43.1	43.1	43.6	44.2	44.2	26.7	659.9
67,0°	46.5	44.8	44.4	43.1	42.5	41.3	41.2	40.3	40.9	40.9	41.5	41.8	41.8	27.1	687.0
68,0°	44.5	42.9	42.3	41.3	40.3	39.1	38.8	38.5	38.7	38.5	39.3	39.3	39.3	27.6	714.6
69,0°	42.1	40.9	40.2	38.9	38.5	37.2	36.6	36.3	36.3	35.7	36.6	36.6	36.9	27.8	742.4
70,0°	39.7	38.4	37.7	36.7	36.4	35.4	34.8	33.9	33.8	33.5	33.5	33.5	33.8	27.9	770.3
71,0°	37.2	36.0	35.5	34.6	34.0	33.3	32.6	31.4	31.4	31.1	31.0	30.7	30.7	27.9	798.2
72,0°	34.8	33.6	33.4	32.2	31.5	30.8	30.2	29.5	29.2	28.6	28.9	28.3	28.3	27.6	825.8

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	715.6	779.1	824.2	841.6	838.1	823.1	794.4	762.7	727.5	700.2	667.8	623.7	567.8	507.8	446.5
74,0°	687.5	748.2	799.8	827.2	841.9	842.3	815.9	779.3	729.9	695.6	658.4	612.1	559.6	504.0	445.5
75,0°	651.6	701.3	748.4	774.9	800.0	804.8	799.9	771.0	717.3	674.7	631.6	580.3	534.9	485.6	426.3
76,0°	608.7	647.3	679.5	689.6	708.1	710.0	713.1	701.6	672.4	629.9	588.3	540.1	499.8	449.7	386.9
77,0°	567.9	591.4	613.0	614.5	622.5	621.0	626.0	616.5	596.1	565.6	533.9	486.1	445.6	392.9	336.5
78,0°	472.5	473.8	514.2	501.0	521.9	500.7	505.7	481.3	496.3	476.3	460.8	415.0	376.1	322.9	275.3
79,0°	375.2	360.7	361.2	350.5	357.1	355.1	374.0	364.8	383.9	370.5	367.3	329.3	301.1	249.1	210.3
80,0°	291.2	271.4	261.7	247.3	245.4	241.5	257.1	260.5	281.8	280.8	280.5	257.5	229.9	186.1	151.1
81,0°	190.7	180.2	174.1	167.4	165.9	162.1	162.3	163.6	192.2	200.0	206.8	198.4	180.8	146.2	112.5
82,0°	109.0	99.4	97.8	94.4	98.6	98.3	104.2	106.1	120.4	128.1	136.3	137.1	133.0	115.5	88.6
83,0°	60.8	57.5	59.6	58.3	60.8	58.8	59.1	55.9	72.0	76.5	84.2	85.7	83.9	74.8	66.2
84,0°	29.7	27.9	29.7	29.7	32.8	34.2	37.6	37.0	41.7	44.4	52.4	56.6	55.7	43.5	34.9
85,0°	6.7	6.3	6.4	6.5	8.1	8.4	12.6	14.0	24.2	25.5	28.4	28.0	22.6	11.1	7.3
86,0°	4.9	4.4	4.4	4.4	4.5	4.7	4.8	5.1	10.2	10.5	12.0	11.2	10.9	7.1	5.2
87,0°	3.7	3.8	3.8	3.9	4.0	3.3	3.3	2.5	3.4	2.8	2.8	2.9	2.8	2.4	2.4
88,0°	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.5	2.5	2.5	2.1	1.7	1.7	1.8
89,0°	2.5	2.5	2.5	2.6	2.5	2.9	2.9	2.1	2.2	1.9	2.0	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	384.7	323.9	274.7	239.4	215.1	193.2	167.1	139.2	111.1	87.1	67.0	58.7	51.8	47.1	43.6
<b>74,0°</b>	377.9	309.4	252.7	215.3	189.7	168.1	138.2	110.5	80.9	60.9	49.0	44.0	40.0	36.3	34.7
<b>75,0°</b>	351.5	282.7	226.5	192.0	166.5	141.4	111.3	81.5	57.4	46.0	37.9	34.6	32.5	31.3	29.1
<b>76,0°</b>	312.4	248.2	198.9	167.2	141.0	114.1	81.3	57.8	41.7	35.9	31.2	27.8	24.7	23.2	20.7
<b>77,0°</b>	268.5	209.2	164.2	137.9	111.2	83.3	56.1	40.2	32.0	27.5	22.3	20.1	17.5	17.1	15.2
<b>78,0°</b>	216.5	171.6	134.8	112.8	83.6	60.3	40.6	30.0	24.3	20.2	17.4	16.0	14.0	12.4	11.2
<b>79,0°</b>	164.5	134.3	106.7	87.7	62.4	43.7	28.4	22.9	16.9	15.1	11.1	10.3	9.0	9.0	7.6
<b>80,0°</b>	121.9	102.2	85.4	65.8	38.8	26.7	20.0	14.8	12.3	9.7	7.5	6.8	6.0	6.0	5.2
<b>81,0°</b>	86.5	76.7	53.2	29.6	21.8	17.2	13.5	10.1	7.4	6.0	5.5	4.8	4.8	4.8	4.8
<b>82,0°</b>	50.7	38.4	30.2	14.8	10.4	10.4	7.9	6.6	5.3	4.7	3.1	3.1	3.5	3.6	3.6
<b>83,0°</b>	36.4	26.3	18.5	10.6	6.5	6.4	6.0	4.8	4.2	3.5	3.5	3.5	1.9	1.8	1.8
<b>84,0°</b>	26.3	9.4	6.3	5.7	4.6	4.6	3.2	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8
<b>85,0°</b>	5.9	4.3	3.1	2.5	2.5	2.5	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8	2.1
<b>86,0°</b>	3.0	2.5	2.5	2.5	1.9	1.9	2.0	1.8	2.0	1.8	2.0	2.1	2.1	2.1	1.2
<b>87,0°</b>	1.9	1.8	1.9	1.9	1.2	1.2	1.2	2.0	1.2	2.0	1.2	1.2	1.5	1.2	1.2
<b>88,0°</b>	1.8	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.2	0.6	1.5	1.2
<b>89,0°</b>	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	0.4	1.4	0.6	0.6	1.2
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
		<b>siteco</b>

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	40.9	38.8	35.9	34.7	36.5	35.6	35.6	646.5	582.2	504.2	449.0	438.0	435.0	407.6	362.2
<b>74,0°</b>	32.7	29.7	31.1	30.0	30.4	30.7	28.9	621.1	555.2	469.8	416.2	419.3	427.5	399.2	354.9
<b>75,0°</b>	27.7	24.2	22.7	20.9	20.3	19.7	22.1	592.8	525.7	424.7	366.4	376.8	394.9	376.0	331.4
<b>76,0°</b>	19.8	17.8	17.1	17.2	16.3	15.7	16.6	560.0	489.3	371.9	309.5	318.6	343.2	338.3	301.5
<b>77,0°</b>	15.2	13.8	12.9	13.5	13.2	12.9	12.9	519.9	438.9	306.8	253.0	262.1	291.9	295.5	267.3
<b>78,0°</b>	11.2	10.7	10.7	9.2	9.8	8.3	9.8	440.2	374.7	243.6	203.4	215.0	245.6	254.7	228.1
<b>79,0°</b>	7.9	7.0	7.0	6.1	7.0	6.1	7.4	371.6	318.4	205.4	175.1	187.0	210.9	219.8	201.7
<b>80,0°</b>	4.3	4.6	4.6	4.6	4.6	4.6	4.9	295.3	256.2	170.4	156.9	164.0	177.3	179.6	153.7
<b>81,0°</b>	4.9	4.0	4.0	4.3	4.3	4.3	3.7	196.2	181.0	135.4	134.7	137.2	138.3	133.0	114.9
<b>82,0°</b>	3.6	3.6	3.4	2.5	2.5	2.5	3.1	123.5	127.4	97.7	98.0	93.8	90.5	81.3	58.9
<b>83,0°</b>	1.8	1.8	2.7	2.8	2.8	2.5	2.5	67.1	71.7	45.5	36.9	29.9	35.8	35.3	34.5
<b>84,0°</b>	2.1	1.8	2.1	2.1	2.1	3.1	2.5	31.6	32.3	21.5	12.4	8.9	12.9	14.0	6.8
<b>85,0°</b>	1.0	2.1	1.2	1.2	1.2	1.2	1.8	6.1	7.0	6.4	6.3	5.8	6.0	5.6	5.5
<b>86,0°</b>	2.1	1.2	1.2	1.2	1.2	1.2	1.2	4.8	4.8	4.7	4.6	4.5	4.4	4.4	4.0
<b>87,0°</b>	1.2	1.5	1.2	1.2	1.2	1.2	1.2	3.6	3.6	3.6	3.5	3.5	3.4	3.4	3.4
<b>88,0°</b>	1.5	0.6	1.2	1.2	1.2	1.2	1.2	3.0	3.0	3.0	2.9	2.9	2.8	2.8	2.8
<b>89,0°</b>	0.3	0.6	1.2	1.2	1.2	1.2	1.2	2.4	2.4	2.3	2.3	2.3	2.2	2.2	1.8
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi easy LED</b>	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	298.6	218.2	138.7	84.4	60.2	52.1	46.6	43.7	42.7	40.7	38.5	35.7	34.5	33.6	33.1
74,0°	281.3	196.9	122.6	72.2	53.6	47.3	42.4	39.9	37.9	36.9	34.5	33.1	31.9	30.8	30.6
75,0°	253.8	172.0	102.0	61.9	48.2	42.3	38.0	35.0	33.6	32.2	30.9	29.7	28.9	28.4	28.0
76,0°	224.6	146.8	83.4	52.6	43.1	38.9	35.1	31.8	30.0	29.2	27.9	27.1	26.0	26.2	25.1
77,0°	192.0	120.5	63.4	43.5	37.1	34.0	29.9	30.0	27.5	26.6	25.3	24.1	23.5	23.3	22.7
78,0°	161.3	92.1	50.8	36.0	30.8	28.7	26.1	25.2	23.2	22.5	21.8	21.6	21.0	20.8	20.2
79,0°	136.9	76.0	40.2	30.0	26.0	23.8	21.8	21.0	20.2	19.4	18.7	18.6	18.3	17.7	17.6
80,0°	100.6	53.0	29.4	23.9	21.0	18.9	18.1	17.3	17.1	15.7	15.1	15.5	14.9	14.7	14.5
81,0°	73.0	38.3	22.0	18.1	16.0	15.2	13.8	13.6	13.4	12.7	12.6	12.4	12.3	11.7	11.7
82,0°	38.4	22.2	15.0	14.0	12.3	11.4	10.7	10.5	10.4	9.7	9.5	9.5	9.2	9.1	9.0
83,0°	22.1	12.6	9.5	8.6	8.5	8.3	7.5	7.4	7.3	7.2	6.5	6.9	6.3	6.2	6.1
84,0°	6.9	6.6	6.1	6.0	5.9	5.8	5.7	5.6	5.5	4.8	4.1	4.0	3.9	3.9	3.8
85,0°	4.8	5.3	3.9	3.8	3.9	3.9	3.8	3.7	3.1	3.6	2.5	2.4	2.3	2.2	2.1
86,0°	3.1	4.1	3.3	3.2	2.5	2.5	2.5	2.5	2.4	2.4	2.4	1.8	1.7	1.2	1.2
87,0°	3.3	2.5	2.5	2.6	2.5	2.5	1.8	1.9	1.8	1.8	1.8	1.2	1.2	1.2	1.2
88,0°	2.7	2.7	2.6	1.9	2.6	1.9	1.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	2.1	1.8	1.8	1.8	2.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	32.3	31.3	31.0	29.7	29.3	28.4	27.8	27.4	26.8	26.4	26.1	25.5	25.8	27.2	852.9
74,0°	29.9	29.2	28.5	27.3	26.9	25.7	25.3	24.4	24.0	23.4	23.0	22.1	22.7	26.3	879.2
75,0°	27.5	26.6	26.1	24.8	24.1	22.9	22.5	21.0	20.3	18.5	18.1	16.9	17.2	24.6	903.7
76,0°	25.0	23.8	23.6	22.4	21.6	19.6	18.6	16.4	15.1	12.4	11.7	9.8	10.4	22.1	925.9
77,0°	22.5	21.3	20.9	19.6	18.4	15.6	14.0	11.5	10.2	8.0	6.8	4.9	5.5	19.4	945.3
78,0°	20.1	18.8	17.9	16.5	14.6	12.1	10.5	8.3	6.8	5.8	4.0	3.1	3.1	16.0	961.3
79,0°	17.4	16.3	15.0	13.7	11.6	9.4	8.3	6.5	4.9	4.0	2.8	1.8	1.8	12.5	973.9
80,0°	14.6	13.9	12.6	11.3	9.0	7.4	6.5	4.9	4.0	2.5	2.1	1.2	1.2	9.5	983.4
81,0°	11.9	11.0	9.9	8.8	7.4	5.9	5.0	4.0	3.4	1.5	1.5	1.2	1.2	6.8	990.2
82,0°	8.9	7.8	7.1	6.4	5.7	4.4	3.5	3.1	2.5	1.2	1.2	1.2	1.2	4.4	994.6
83,0°	5.8	5.3	4.6	4.2	3.5	2.9	2.2	2.2	1.5	1.2	1.2	1.2	1.2	2.6	997.1
84,0°	3.3	2.9	2.4	2.4	2.2	1.6	1.6	1.6	1.2	1.2	1.2	0.9	1.2	1.4	998.5
85,0°	2.1	1.2	1.2	1.2	1.6	1.2	1.2	1.2	0.9	0.9	0.9	0.6	1.2	0.6	999.1
86,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.7	0.9	0.3	0.9	0.3	0.6	0.3	999.4
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.3	0.6	0.6	1.2	0.3	0.0	0.2	999.7
88,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.0	0.9	1.2	0.3	0.0	0.2	999.8
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.9	0.9	0.3	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
<b>Dimming levels table</b>		<b>environmental temperature: 25°C</b>
<b>siteco</b>		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	20180	147.0	155.2	151.1
95	237	251	19169	137.0	144.6	140.8
90	221	249	18175	127.5	134.7	131.1
85	205	246	17144	118.4	124.8	121.6
80	190	243	16137	109.7	115.7	112.7
75	176	241	15160	101.7	107.2	104.4
70	162	238	14153	93.8	98.8	96.3
65	148	234	13120	85.9	90.5	88.2
60	135	231	12123	78.6	82.8	80.7
55	122	227	11098	71.4	75.1	73.2
50	110	223	10125	64.8	68.1	66.4
45	97	219	9047	57.6	60.5	59.0
40	86	214	8106	51.6	54.2	52.9
35	74	209	7060	44.9	47.3	46.1
30	63	203	6082	38.9	40.9	39.9
25	52	196	5082	33.0	34.5	33.8
20	41	187	4061	27.1	28.3	27.7
15	30	176	3018	21.2	22.1	21.6
13	25	169	2538	18.5	19.2	18.8

## Dimming levels table

environmental temperature: 5°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	20900	148.5	156.9	152.7
95	238	252	19872	139.0	146.8	142.9
90	222	249	18809	129.6	136.9	133.2
85	207	247	17780	120.9	127.5	124.2
80	192	244	16718	112.1	118.4	115.2
75	178	241	15694	104.1	109.8	107.0
70	164	238	14645	96.1	101.3	98.7
65	150	235	13569	88.2	92.8	90.5
60	137	231	12538	80.8	85.1	82.9
55	124	228	11482	73.5	77.3	75.4
50	112	224	10484	66.8	70.2	68.5
45	99	219	9378	59.5	62.5	61.0
40	87	215	8329	52.8	55.5	54.2
35	76	210	7351	46.7	49.2	48.0
30	64	204	6264	40.1	42.0	41.0
25	53	197	5246	34.0	35.6	34.8
20	42	188	4210	28.1	29.2	28.6
15	31	177	3152	22.1	23.0	22.6
12	25	169	2569	18.8	19.6	19.2

## Photometric test report

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	20570	147.7	156.0	151.8
95	237	251	19515	137.8	145.4	141.6
90	221	249	18483	128.2	135.4	131.8
85	206	246	17483	119.6	126.1	122.8
80	191	244	16447	111.0	117.1	114.0
75	177	241	15445	102.9	108.5	105.7
70	163	238	14416	94.9	100.0	97.4
65	149	234	13359	87.0	91.6	89.3
60	136	231	12343	79.7	83.9	81.8
55	123	227	11302	72.5	76.2	74.4
50	111	224	10315	65.7	69.1	67.4
45	98	219	9222	58.5	61.5	60.0
40	87	215	8270	52.5	55.1	53.8
35	75	209	7213	45.8	48.2	47.0
30	63	203	6133	39.2	41.2	40.2
25	52	196	5123	33.2	34.8	34.0
20	41	187	4092	27.3	28.5	27.9
15	30	176	3040	21.3	22.2	21.8
12	25	169	2556	18.7	19.4	19.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi easy LED	<b>Order number: 5XE7A47N08MB</b> <b>EAN: 4058352897829</b>	<b>LP number</b> <b>59080_613</b>
---	--	--------------------------------------

**Luminousfluxs table**



Temperature °C	Luminous flux lm	Power consumption W
25.0	20180.0	147.0
5.0	20900.0	148.5
15.0	20570.0	147.7