


# Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 9750 lm Power consumption = 71.0 W Luminous efficacy = 137.3 lm/W	<b>serial documentation</b> <b>09.08.2023</b>

**Luminous intensity in cd/klm** C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 842 cd/klm**

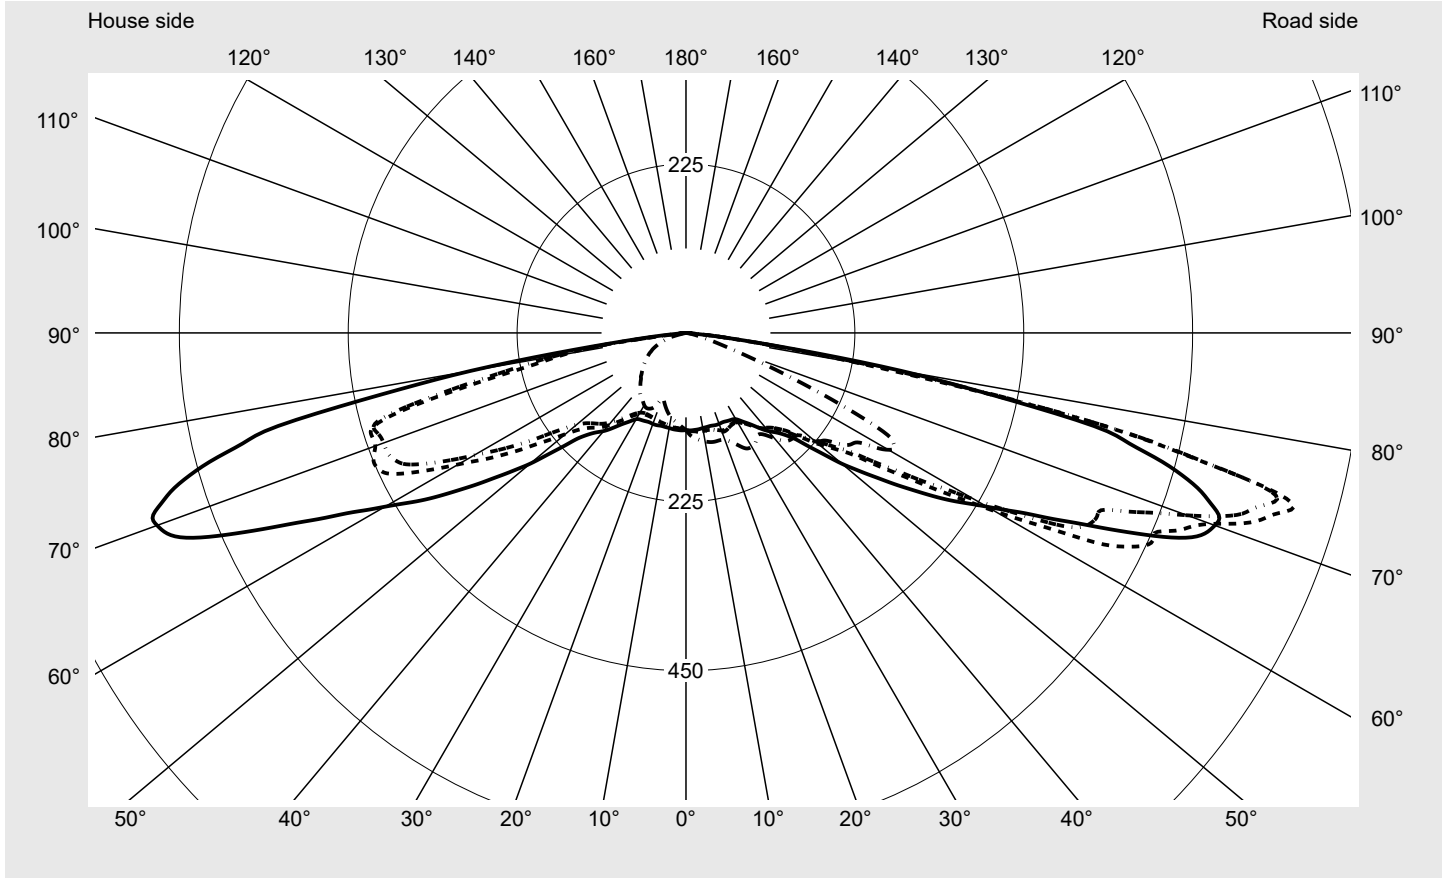

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**


Class:	---
Imax 70°	827.2
Imax 80°	295.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> 59080_738
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 74°**    **KMK 73°**    **KMK 72°**    **KMK 71°**      **siteco**

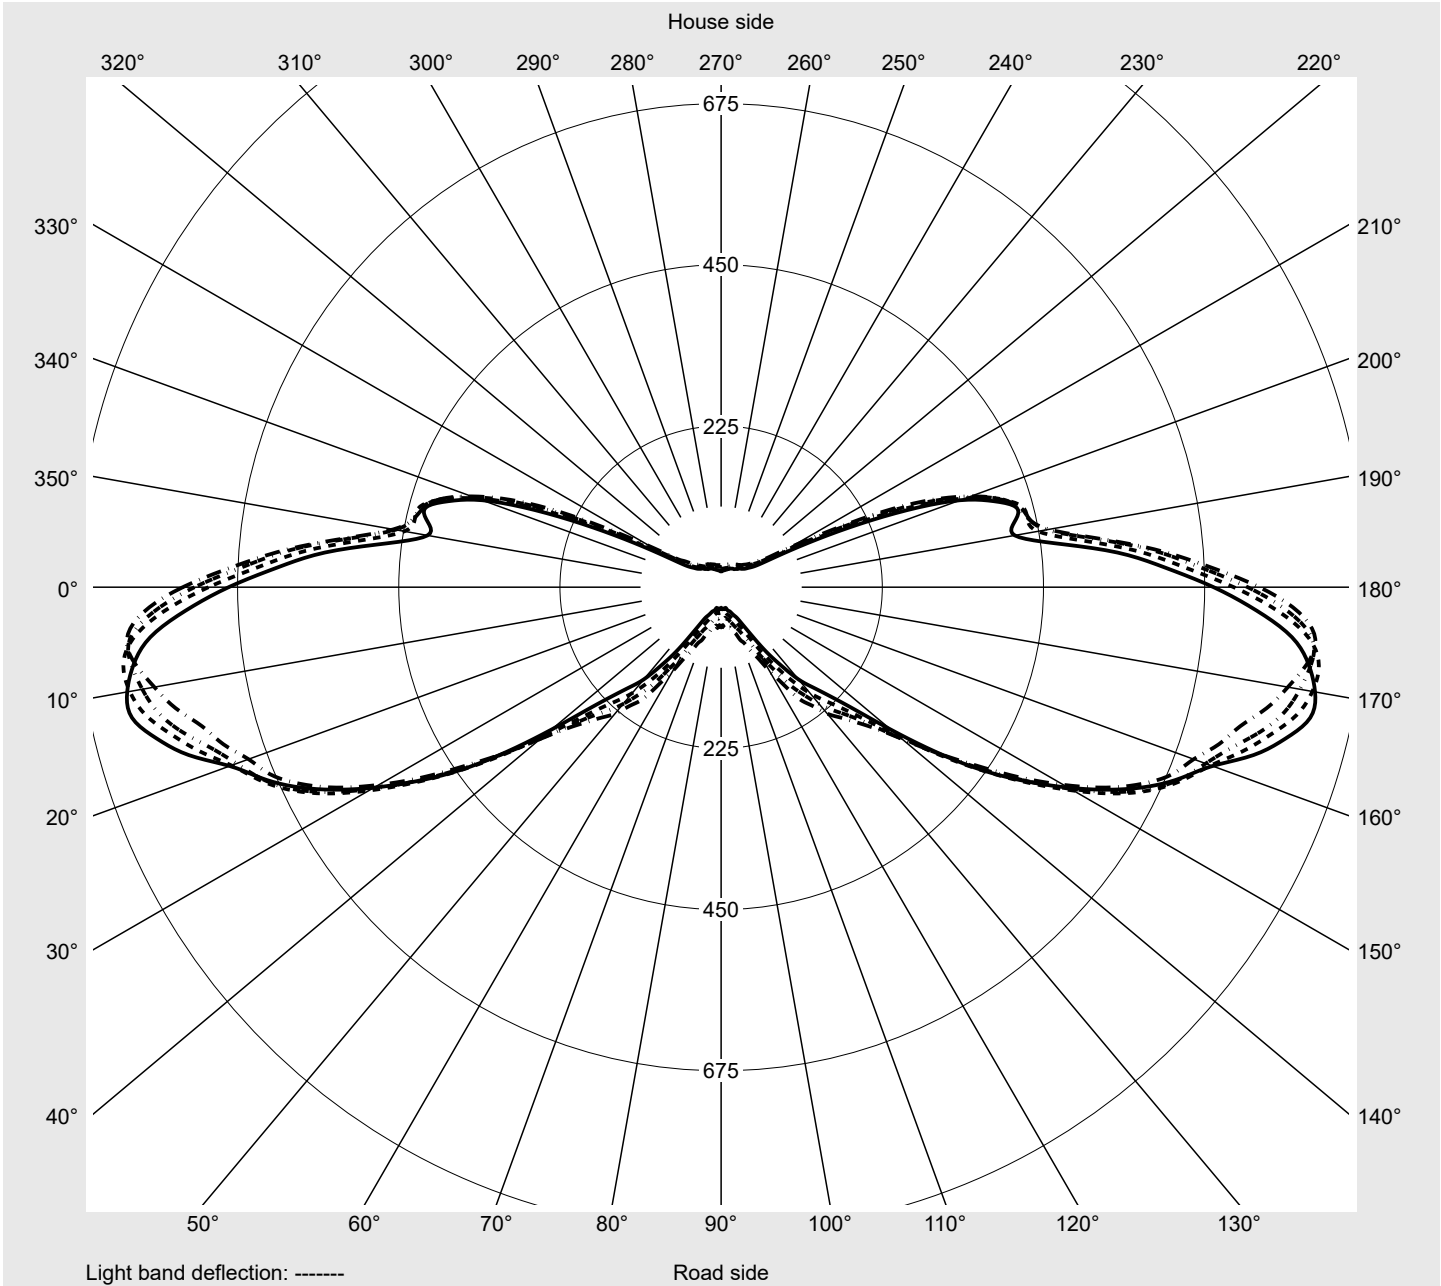

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> 59080_738
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	130.0	130.1	130.3	130.6	130.7	130.9	131.0	130.9	131.2	131.5	131.5	131.5	132.1	132.1	132.4
5,0°	129.8	130.2	130.2	130.3	130.9	131.5	131.5	132.7	132.7	132.3	133.9	133.9	133.9	133.9	133.9
7,5°	129.5	129.7	130.7	130.9	131.7	132.7	133.3	133.3	133.7	134.3	134.5	134.7	135.0	135.7	136.1
10,0°	128.7	129.4	130.3	131.2	131.8	132.9	133.5	133.4	134.1	134.5	135.0	135.6	135.9	136.5	137.0
12,5°	128.3	129.3	130.4	131.1	131.8	132.7	133.2	134.1	134.3	135.2	136.1	137.1	137.8	138.3	138.8
15,0°	128.1	129.8	131.2	131.9	132.4	133.5	133.6	134.9	135.7	137.1	138.3	139.0	139.8	140.4	141.4
17,5°	128.9	130.6	131.8	133.0	134.2	135.3	136.5	137.9	139.2	140.4	141.6	142.9	143.8	144.6	145.3
20,0°	129.0	131.1	133.1	134.7	136.9	138.3	140.4	142.3	143.6	144.7	145.7	146.7	147.5	148.3	149.5
22,5°	128.7	131.0	133.3	135.2	136.9	138.7	140.4	142.6	144.5	146.0	147.6	149.4	150.9	151.8	152.9
25,0°	129.5	131.5	133.4	134.4	135.5	136.8	137.9	139.1	141.8	144.2	146.7	149.1	151.4	154.4	156.5
27,5°	130.5	131.6	132.2	133.1	134.0	135.3	136.5	138.4	139.6	142.3	143.9	146.5	149.4	152.2	155.3
30,0°	132.7	133.8	134.2	135.4	136.5	136.4	137.5	138.9	139.5	141.3	142.6	144.2	145.6	148.3	152.2
32,5°	139.9	140.6	141.8	141.7	142.3	142.3	143.1	143.2	143.3	143.7	144.3	144.6	145.6	147.1	149.6
35,0°	148.3	149.2	149.7	150.8	151.6	150.5	149.9	150.7	150.4	149.4	148.7	147.3	146.8	147.3	149.2
37,5°	159.3	159.5	159.2	159.1	159.8	159.1	158.7	157.5	156.7	156.1	154.6	152.1	150.4	149.6	150.3
40,0°	170.7	169.7	168.2	167.0	166.3	166.1	164.9	163.2	161.8	160.8	159.4	157.5	155.7	153.6	151.4
42,5°	180.4	178.2	176.3	175.2	174.5	173.0	171.5	169.7	168.1	166.8	165.3	163.3	160.7	157.4	154.6
45,0°	195.4	192.7	189.9	187.8	186.5	185.0	182.8	181.1	178.8	176.6	173.8	169.4	164.9	161.5	157.9
46,0°	204.7	201.7	198.4	195.6	193.6	191.9	189.0	185.3	182.7	181.6	178.3	173.1	168.0	164.1	160.1
47,0°	219.1	215.1	210.6	206.8	203.4	200.3	197.7	194.3	190.5	187.5	183.4	177.4	171.8	167.6	163.2
48,0°	234.4	230.0	224.1	218.4	213.3	209.0	205.0	201.2	197.3	193.9	189.1	182.7	176.9	171.9	167.3
49,0°	252.0	247.1	240.5	232.8	226.0	219.8	214.6	210.1	205.5	201.0	195.7	189.1	182.6	177.0	171.9
50,0°	271.2	264.6	255.6	247.1	238.2	230.4	225.0	220.1	214.4	209.3	203.8	197.4	189.9	183.4	177.7
51,0°	287.4	280.4	270.8	259.5	248.1	239.5	233.6	228.7	222.9	218.5	213.2	206.8	198.2	191.4	186.0
52,0°	304.5	297.1	286.3	273.6	260.8	250.5	243.4	238.2	233.8	229.2	223.6	217.4	209.0	201.2	194.9
53,0°	322.3	314.6	303.6	289.0	273.2	262.0	255.3	249.7	245.0	241.4	235.7	229.6	222.1	214.4	206.3
54,0°	342.2	335.0	324.1	309.5	293.1	277.6	267.5	261.7	259.3	254.8	249.3	243.3	235.8	228.6	220.1
55,0°	361.7	356.4	346.0	333.0	318.1	302.6	289.6	281.4	276.4	271.0	265.2	258.5	250.4	243.4	235.7
56,0°	382.5	379.8	370.6	357.3	342.9	328.9	314.5	302.8	296.4	289.5	282.4	275.5	267.1	259.6	252.5
57,0°	403.7	407.8	402.4	392.4	374.9	358.8	341.0	329.3	318.1	309.3	300.0	292.1	283.2	275.7	267.0
58,0°	423.5	433.3	435.7	429.9	414.5	395.0	373.7	354.8	341.7	330.8	319.4	310.1	299.6	290.0	279.1
59,0°	442.1	458.9	465.8	463.5	452.4	431.7	404.3	382.4	366.8	352.5	338.5	326.1	312.5	300.3	288.5
60,0°	463.0	490.9	504.4	507.6	495.8	474.9	446.0	419.5	393.9	374.5	355.5	337.7	320.7	307.7	296.3
61,0°	486.8	523.8	544.1	550.3	537.9	517.7	486.6	453.7	419.9	393.1	368.4	346.4	327.0	313.1	304.0
62,0°	511.8	557.2	585.4	594.8	585.8	564.0	529.0	487.6	440.2	404.5	374.4	350.2	330.9	319.6	313.7
63,0°	544.5	595.1	624.1	641.8	640.8	617.8	568.0	510.4	453.0	410.8	378.0	355.4	339.2	331.7	326.8
64,0°	577.3	628.9	664.7	682.7	679.6	649.5	588.8	519.2	459.0	416.7	385.9	368.8	357.9	354.0	348.8
65,0°	616.2	672.3	706.3	726.2	715.2	671.5	596.9	519.9	464.8	429.9	405.1	393.4	383.3	378.5	366.7
66,0°	656.9	717.8	753.3	761.9	740.6	680.6	599.8	526.4	481.3	456.0	435.9	426.7	414.0	403.3	384.1
67,0°	696.5	765.3	796.9	790.2	747.7	680.0	603.4	543.4	510.0	491.9	476.9	467.3	447.0	426.5	400.2
68,0°	726.8	796.6	823.4	802.1	760.5	703.3	635.5	585.5	553.5	541.2	527.7	511.3	480.9	451.4	414.7
69,0°	742.6	807.9	826.0	806.4	771.3	720.6	668.9	639.2	610.6	599.9	580.0	553.5	514.6	471.5	422.7
70,0°	749.8	808.5	827.2	810.6	776.0	744.0	710.5	696.5	664.9	649.0	621.1	584.0	536.6	484.6	426.9
71,0°	751.5	807.4	832.7	824.7	803.3	780.0	750.1	728.7	702.0	681.9	649.2	605.7	551.9	494.1	433.6
72,0°	735.1	793.2	828.5	830.5	820.5	805.5	779.4	746.5	719.8	696.3	664.7	619.2	562.9	502.4	441.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	132.3	132.2	132.2	132.3	132.6	132.7	133.2	133.0	133.0	132.8	133.3	133.1	133.7	133.7	133.7
5,0°	134.2	134.6	135.0	134.6	135.2	135.3	135.7	136.2	136.3	136.8	137.3	137.4	137.8	138.2	138.8
7,5°	136.4	136.5	136.8	137.0	137.5	137.7	138.4	138.4	138.7	139.1	139.8	140.6	141.3	141.4	142.0
10,0°	137.6	137.7	138.4	138.8	139.3	140.0	139.9	141.0	141.0	140.9	142.3	142.9	144.0	144.6	144.9
12,5°	139.1	139.7	140.6	140.9	141.8	141.8	142.8	143.2	144.0	144.6	145.4	146.0	146.5	147.2	147.8
15,0°	141.7	142.7	143.5	144.3	144.5	145.1	145.7	146.4	146.5	146.8	148.2	148.2	149.0	149.0	149.0
17,5°	146.1	146.6	147.2	147.7	148.1	148.6	148.5	148.9	149.5	150.1	150.8	150.7	150.7	151.1	151.3
20,0°	150.4	151.0	152.0	152.3	152.2	152.0	152.7	152.7	152.7	153.1	153.8	153.7	154.3	154.4	154.4
22,5°	154.1	155.3	155.7	156.2	156.2	156.7	156.6	156.5	156.8	157.0	157.6	158.1	158.2	158.3	157.9
25,0°	158.4	159.8	160.4	160.8	160.8	161.8	161.1	161.5	162.8	163.5	164.6	165.9	165.4	165.3	165.2
27,5°	159.5	163.1	166.1	167.3	168.0	169.5	170.4	171.8	173.6	174.8	175.7	176.0	175.2	174.3	173.7
30,0°	157.8	163.8	170.1	175.4	179.1	181.2	182.8	183.3	184.4	186.1	186.5	185.3	182.1	179.7	179.5
32,5°	153.9	160.6	170.5	179.7	187.5	190.4	189.8	189.2	189.4	190.3	188.6	183.3	178.1	175.1	174.2
35,0°	153.4	159.2	166.6	176.2	185.1	190.5	189.9	186.6	184.1	183.4	181.2	176.9	173.5	170.8	169.7
37,5°	152.5	156.6	160.8	166.3	174.1	178.7	179.7	178.1	177.7	179.6	179.4	176.0	173.8	173.6	173.7
40,0°	150.7	152.6	156.2	158.0	160.9	166.4	172.0	175.8	178.3	180.1	181.2	182.6	185.0	186.8	187.8
42,5°	152.1	151.1	151.9	153.3	155.1	161.2	170.5	179.1	186.4	191.2	196.2	200.4	204.9	207.1	208.8
45,0°	154.4	152.4	151.4	152.2	154.4	161.2	173.9	187.8	197.9	206.4	214.4	219.2	220.4	221.0	220.6
46,0°	156.8	154.2	152.3	152.0	154.4	162.3	176.9	191.9	203.0	212.3	219.3	223.7	225.6	226.0	224.2
47,0°	159.3	155.9	153.5	152.9	155.4	163.2	179.7	196.9	208.7	216.6	223.5	227.8	229.7	229.5	227.0
48,0°	162.9	158.3	154.9	154.4	156.9	164.8	182.8	202.5	214.9	223.0	227.9	230.8	232.1	232.7	229.7
49,0°	167.0	161.6	157.6	156.5	158.6	167.3	186.6	205.1	218.0	227.9	233.7	235.2	235.5	232.7	227.4
50,0°	172.4	166.7	162.1	159.8	162.8	172.1	192.5	210.8	222.3	232.5	240.2	238.7	237.0	231.9	231.0
51,0°	179.5	173.2	168.4	165.8	167.9	178.2	199.4	217.3	228.7	242.7	247.0	242.8	240.7	239.5	240.4
52,0°	188.3	181.1	176.5	174.3	175.4	185.6	206.8	225.7	234.5	250.3	256.2	250.7	251.3	251.7	252.5
53,0°	199.1	192.5	187.3	184.8	187.3	197.4	216.4	234.3	243.1	255.2	262.6	261.0	261.3	261.6	259.5
54,0°	211.4	204.1	198.1	194.7	197.2	207.8	225.6	243.6	252.2	263.2	267.6	265.3	265.7	263.2	265.7
55,0°	225.6	216.7	210.3	205.8	207.3	217.9	235.7	253.0	260.3	267.9	267.4	266.0	264.8	268.9	272.9
56,0°	242.9	231.7	222.7	215.8	216.2	226.9	245.2	260.0	265.8	271.7	267.4	266.6	272.6	279.8	285.0
57,0°	256.6	242.7	230.7	222.5	224.4	237.4	256.6	270.0	275.0	276.9	273.4	278.4	287.1	293.0	294.1
58,0°	267.0	252.5	239.5	231.6	236.3	249.1	269.9	282.1	286.2	286.1	284.8	290.5	296.1	296.1	292.3
59,0°	275.1	261.5	251.5	246.7	251.1	265.1	284.7	293.7	293.8	291.6	290.8	291.7	291.7	287.0	280.5
60,0°	284.0	273.4	267.4	262.1	264.9	275.2	289.6	297.1	293.2	288.3	287.8	283.3	276.8	271.4	267.0
61,0°	295.2	288.3	282.9	276.8	275.2	283.2	292.3	296.7	291.1	284.7	275.8	264.0	256.0	253.0	248.6
62,0°	307.9	303.5	296.1	285.9	281.2	285.6	290.8	294.6	287.8	273.9	253.1	243.4	235.4	229.8	229.9
63,0°	325.0	318.0	303.9	290.6	283.2	285.9	289.3	289.9	273.7	253.6	233.3	221.8	211.9	211.9	209.1
64,0°	341.2	326.9	309.7	293.8	283.9	282.3	281.1	274.7	256.7	235.3	211.7	199.1	193.4	193.6	191.7
65,0°	352.8	333.3	312.2	294.7	281.7	276.4	271.5	261.8	241.0	218.1	194.4	183.9	179.8	185.1	187.2
66,0°	364.1	339.0	312.0	291.3	277.3	269.7	260.5	247.6	227.0	205.5	183.8	172.3	175.8	179.9	177.1
67,0°	372.5	340.2	309.8	288.3	273.9	261.1	249.4	234.9	216.6	195.2	174.3	169.9	169.0	168.7	160.7
68,0°	376.6	339.3	307.3	284.1	267.4	254.8	240.2	224.7	206.7	187.2	169.8	160.5	156.2	150.6	140.6
69,0°	378.0	337.0	303.1	279.7	261.4	248.2	230.0	216.2	197.6	177.5	156.8	143.5	133.4	125.9	112.3
70,0°	379.0	333.2	296.9	274.0	256.2	241.0	221.8	206.9	185.4	161.6	136.5	122.6	110.2	100.6	89.2
71,0°	380.2	329.5	291.8	266.6	246.9	230.4	208.3	190.5	159.5	134.8	111.8	98.3	84.6	78.5	68.0
72,0°	380.9	328.8	285.3	254.5	233.9	212.8	189.2	165.6	135.3	111.5	87.8	75.3	65.1	59.8	54.3

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	134.2	134.8	135.3	136.1	136.5	137.3	136.6	129.9	129.8	129.6	129.0	128.7	128.7	128.7	128.4
5,0°	139.4	140.0	140.1	140.7	141.4	140.9	140.7	129.5	129.1	128.7	128.3	127.4	127.4	126.6	126.8
7,5°	142.7	143.2	143.2	143.9	143.7	143.7	144.0	129.0	128.6	128.0	127.5	127.0	126.6	125.7	125.6
10,0°	146.5	146.2	146.2	146.6	146.9	147.1	146.8	127.8	127.1	126.8	126.3	125.9	125.2	124.3	123.7
12,5°	148.2	148.4	148.7	148.9	148.9	148.9	149.0	127.2	126.3	125.7	125.1	124.8	124.1	123.1	122.4
15,0°	149.6	149.6	149.8	149.9	149.2	150.1	149.9	126.9	125.7	124.8	124.4	123.7	122.8	121.6	121.8
17,5°	151.3	150.9	150.9	150.4	149.9	149.7	149.9	127.6	126.1	124.9	124.4	123.3	122.3	121.4	121.0
20,0°	153.6	152.6	151.9	151.5	151.4	151.1	151.7	127.5	125.9	124.5	123.3	122.4	121.4	120.7	119.9
22,5°	157.5	157.1	156.5	157.0	156.5	156.9	157.3	126.8	125.2	123.7	122.4	121.5	120.5	119.7	118.7
25,0°	165.1	164.2	164.7	165.5	165.0	165.5	165.2	127.3	125.4	123.8	122.5	121.3	120.1	118.6	117.2
27,5°	173.5	173.9	173.5	173.8	173.0	173.2	173.5	128.5	126.7	124.9	123.5	122.2	120.4	118.8	116.5
30,0°	178.9	177.7	177.0	176.3	176.8	176.0	175.1	131.7	130.5	128.3	126.4	125.1	122.8	120.4	118.1
32,5°	173.5	173.0	173.0	172.8	172.9	173.2	172.6	138.3	137.1	134.9	133.2	130.6	128.0	125.0	122.1
35,0°	170.0	168.9	167.3	167.4	167.1	167.1	166.5	147.9	146.5	144.5	141.9	139.4	136.1	132.2	128.5
37,5°	173.7	173.6	173.2	172.2	171.0	170.3	170.8	158.6	157.7	155.9	153.3	149.6	145.3	140.1	134.5
40,0°	188.8	190.4	190.0	187.7	185.1	185.5	183.1	170.8	170.5	168.8	165.4	160.8	155.4	148.2	140.3
42,5°	208.1	208.2	205.7	202.0	198.6	196.9	195.3	181.9	182.1	180.4	176.3	170.9	164.1	156.0	146.3
45,0°	219.8	219.1	211.9	206.8	202.3	200.3	199.6	196.8	195.8	192.1	185.9	178.7	170.7	161.6	149.9
46,0°	221.6	220.1	215.8	208.2	203.8	199.4	200.2	206.7	205.1	199.7	191.3	182.5	173.3	163.8	151.7
47,0°	225.1	220.0	216.5	208.6	202.4	199.4	200.9	220.4	217.5	209.6	198.4	187.1	176.4	166.0	153.5
48,0°	223.8	218.1	213.4	208.7	205.1	202.2	203.9	234.7	230.7	220.8	207.0	193.0	179.9	168.1	155.3
49,0°	225.4	221.9	218.0	215.3	213.6	213.8	211.3	252.4	247.3	235.2	218.0	200.6	184.6	170.9	156.9
50,0°	232.0	238.3	229.2	229.7	226.0	226.3	221.1	271.6	265.3	251.0	230.9	209.9	190.4	174.0	158.7
51,0°	245.9	254.8	243.7	239.2	234.6	232.2	229.1	288.6	281.5	265.8	244.0	220.5	197.9	178.4	160.7
52,0°	254.1	264.9	251.3	239.5	233.7	227.4	232.8	305.6	297.9	280.8	257.0	232.1	207.7	185.3	163.7
53,0°	260.6	268.5	258.6	250.6	245.3	241.8	240.2	323.0	314.0	295.0	269.5	243.8	218.8	194.4	170.5
54,0°	266.7	278.9	272.6	264.4	256.2	255.8	251.2	341.5	330.2	309.8	283.5	257.6	232.3	206.3	180.8
55,0°	279.0	284.8	282.6	277.9	267.3	266.0	260.4	358.0	344.1	323.7	298.3	273.1	248.0	220.9	192.8
56,0°	285.5	286.4	287.4	277.1	267.9	263.3	265.4	375.9	358.3	336.6	311.7	287.8	263.3	236.6	208.1
57,0°	292.4	287.8	284.1	272.9	266.3	263.3	268.4	393.0	371.9	349.2	325.6	303.1	278.7	252.5	226.6
58,0°	290.7	286.3	291.3	294.4	283.6	280.5	277.6	407.6	384.4	360.6	339.4	318.3	294.1	267.9	240.5
59,0°	278.7	278.8	289.0	302.1	302.5	298.0	297.9	419.7	394.1	371.3	352.6	333.1	309.5	284.0	258.1
60,0°	267.7	269.5	280.0	297.0	305.9	315.0	311.4	434.3	407.6	387.1	369.0	350.3	326.4	301.1	274.3
61,0°	249.9	252.8	265.4	286.0	308.3	317.7	317.6	450.6	421.7	403.7	387.6	370.0	345.0	318.0	288.7
62,0°	232.5	233.4	247.8	271.2	300.1	311.6	313.3	469.5	435.9	420.6	407.3	389.8	363.8	334.8	303.1
63,0°	210.5	214.1	229.5	256.6	289.2	307.1	304.1	497.2	456.6	439.8	427.7	409.9	382.2	351.1	315.1
64,0°	195.8	207.8	221.2	242.0	263.9	272.6	274.0	528.6	481.2	461.4	447.0	428.4	399.5	366.6	330.4
65,0°	193.0	195.0	200.9	209.0	222.4	228.7	232.2	566.7	509.6	482.8	462.0	441.7	413.6	380.6	343.9
66,0°	177.8	172.4	177.5	174.8	187.2	183.4	191.0	603.0	538.5	500.4	472.0	447.3	421.0	391.8	356.2
67,0°	155.5	148.8	147.2	145.6	152.3	149.9	152.3	631.8	566.0	518.3	478.9	450.1	425.8	400.5	365.3
68,0°	134.7	124.7	122.6	119.0	124.7	116.2	119.8	650.9	578.9	525.3	480.4	449.2	428.4	406.4	370.4
69,0°	104.5	96.5	91.9	88.9	92.3	87.9	93.4	662.8	586.6	524.4	475.2	444.8	428.8	409.6	374.1
70,0°	83.3	75.7	73.2	70.2	72.7	68.8	71.9	672.8	595.5	524.6	468.0	440.6	428.8	410.5	374.4
71,0°	64.9	58.0	57.5	54.0	57.0	53.2	55.9	678.9	607.0	526.4	464.7	439.8	429.5	409.7	370.6
72,0°	50.2	46.0	45.0	43.0	44.2	42.7	44.2	666.3	601.5	522.2	461.6	440.6	432.1	409.2	367.4

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6
2,5°	128.2	128.1	127.8	127.7	127.7	127.5	127.1	126.8	126.6	126.3	126.2	126.1	126.1	126.0	125.9
5,0°	126.9	126.5	125.9	125.4	125.4	125.3	124.9	124.4	123.9	123.9	123.5	123.2	122.8	122.5	122.5
7,5°	125.3	125.1	124.3	124.0	123.3	122.7	122.2	122.1	121.8	121.1	120.9	120.8	120.4	119.9	119.8
10,0°	123.9	122.6	121.8	121.7	121.7	121.0	120.4	120.1	119.7	119.7	119.6	119.1	118.5	118.3	117.8
12,5°	121.9	121.3	121.1	120.8	120.4	119.8	119.5	118.9	118.6	118.2	117.5	117.1	116.4	115.5	114.8
15,0°	120.4	120.6	119.3	119.3	118.7	118.6	118.2	117.2	116.3	115.7	115.0	114.2	113.2	112.3	111.2
17,5°	120.0	119.1	118.6	118.0	117.4	116.7	116.0	115.2	113.8	112.7	111.6	110.4	109.5	108.1	106.6
20,0°	118.6	118.1	117.7	116.7	115.9	114.6	113.4	112.2	110.8	109.1	107.7	105.8	104.0	102.0	100.2
22,5°	117.5	116.5	115.7	114.4	113.0	111.8	110.5	108.6	106.5	104.3	101.8	99.6	97.4	95.1	93.6
25,0°	116.1	114.9	113.7	112.6	111.4	108.9	106.4	104.0	100.4	97.8	94.9	92.8	91.3	89.7	88.7
27,5°	115.2	113.4	112.3	109.9	107.3	104.3	101.2	97.9	94.8	92.2	90.0	88.4	88.1	90.2	93.8
30,0°	115.2	113.9	110.3	107.0	103.4	99.8	95.6	92.7	89.8	88.1	87.1	89.4	93.5	98.4	103.7
32,5°	118.0	114.2	110.0	104.6	99.4	94.9	91.6	88.5	86.5	86.6	90.0	95.5	101.2	107.9	114.2
35,0°	123.1	117.2	109.8	102.4	96.5	91.5	87.3	85.2	85.9	89.2	94.5	101.0	107.7	114.2	119.5
37,5°	127.1	117.8	108.4	99.9	92.7	87.3	84.5	85.1	87.9	92.2	97.5	103.5	109.5	114.9	118.3
40,0°	130.1	117.6	106.1	95.9	88.2	84.0	84.2	87.3	91.0	94.3	98.5	103.2	107.5	110.8	111.7
42,5°	132.3	116.1	101.5	90.8	84.7	83.6	86.1	89.5	92.7	95.8	98.8	101.4	103.7	105.2	104.8
45,0°	132.9	113.6	97.6	87.9	84.7	86.1	88.9	91.1	93.2	95.3	97.0	98.4	99.1	98.8	97.5
46,0°	134.1	113.8	96.8	87.3	84.8	86.9	89.6	91.1	92.6	94.0	95.2	95.9	96.8	96.5	94.4
47,0°	135.5	114.2	96.4	87.2	86.1	88.2	89.9	91.1	92.1	92.5	93.4	93.9	94.3	93.7	91.4
48,0°	137.4	115.7	97.1	87.7	86.9	89.1	90.5	90.9	91.1	91.4	91.5	91.8	91.6	90.7	88.6
49,0°	139.2	117.5	98.4	88.8	88.0	90.1	90.7	90.3	90.0	89.5	89.6	89.7	89.0	87.9	85.9
50,0°	141.5	119.5	100.2	90.7	89.5	90.7	90.4	89.7	89.0	87.5	87.1	87.1	86.3	85.0	83.0
51,0°	142.6	122.1	103.3	92.8	91.3	92.2	91.0	89.6	87.8	85.9	84.5	84.0	82.7	81.4	80.3
52,0°	145.6	124.9	106.1	95.7	92.9	92.7	91.4	89.7	87.2	83.9	82.1	81.6	80.3	79.0	77.8
53,0°	149.7	128.4	109.4	98.4	95.5	94.1	91.8	89.3	86.0	82.5	80.1	79.3	78.2	76.7	75.5
54,0°	157.7	133.1	112.5	101.5	98.4	95.7	92.5	89.5	85.0	80.6	78.2	77.1	75.5	74.6	73.3
55,0°	166.4	140.2	117.6	104.4	99.6	96.3	92.6	88.2	83.2	78.6	75.7	74.3	73.2	72.3	70.9
56,0°	180.6	149.8	123.8	108.2	102.4	97.5	92.1	87.3	81.3	76.6	74.2	72.5	71.4	70.5	69.1
57,0°	197.8	164.1	133.4	112.4	104.1	97.9	91.6	85.5	79.5	74.6	72.0	70.6	69.4	68.6	66.8
58,0°	211.8	176.2	141.8	118.6	107.4	99.2	90.7	83.5	77.3	72.8	70.1	68.7	67.2	66.6	65.0
59,0°	228.1	190.9	153.0	125.5	110.3	99.6	90.0	82.2	75.5	71.0	68.4	66.8	65.1	64.4	63.2
60,0°	241.7	202.9	163.5	131.9	112.8	99.5	89.2	80.6	74.1	69.3	66.9	64.9	63.0	62.6	61.2
61,0°	255.1	213.4	172.0	139.1	117.1	100.1	87.3	78.2	72.0	68.0	65.1	63.1	61.4	60.5	59.0
62,0°	265.6	221.5	179.9	146.1	120.7	100.3	85.7	77.0	70.2	66.2	63.2	60.8	59.1	58.2	57.3
63,0°	274.1	228.8	185.4	149.5	121.3	99.4	84.2	74.2	68.4	64.3	61.3	59.0	57.2	56.1	55.7
64,0°	285.8	234.4	188.6	149.9	121.0	98.2	81.5	72.4	66.6	62.5	59.5	57.1	55.3	54.1	53.3
65,0°	294.0	239.3	189.9	149.1	116.5	94.6	79.2	70.0	64.2	60.2	57.6	55.3	53.5	52.2	51.1
66,0°	301.8	245.3	191.8	146.3	112.3	90.2	75.9	67.7	61.9	58.3	55.4	53.4	51.6	50.4	49.2
67,0°	310.4	249.2	190.8	139.6	105.4	85.2	72.3	64.4	60.1	56.4	53.4	51.0	49.3	48.6	47.5
68,0°	314.4	251.7	188.5	134.1	99.3	80.0	69.0	61.9	57.0	53.5	51.0	49.1	47.3	46.8	45.9
69,0°	318.7	252.9	183.3	127.5	92.5	76.0	64.9	58.2	53.6	50.9	48.0	46.5	44.4	44.6	43.3
70,0°	319.5	253.1	176.2	117.9	84.0	70.4	60.8	54.6	49.9	47.3	44.9	43.5	41.9	41.5	40.3
71,0°	318.7	249.1	168.2	110.7	75.1	64.1	56.1	50.5	46.9	44.4	42.0	40.6	39.3	38.6	37.4
72,0°	310.0	234.4	154.0	98.2	68.0	57.4	50.8	47.1	44.6	42.6	40.2	38.1	36.5	36.2	35.1

# Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	129.6	0.2	0.2
2,5°	125.8	125.7	125.6	125.6	125.5	125.5	125.4	125.3	125.3	125.3	125.3	125.3	125.3	1.6	1.7
5,0°	122.3	122.2	122.0	121.7	121.5	121.4	121.4	121.3	121.1	121.0	121.0	121.0	121.0	3.1	4.8
7,5°	119.5	119.4	119.2	119.1	118.7	118.0	118.0	118.0	118.0	118.0	117.9	117.9	117.9	4.6	9.5
10,0°	117.2	116.8	116.5	116.1	115.6	115.3	114.8	114.8	114.6	114.3	114.3	114.3	114.3	6.2	15.7
12,5°	114.2	113.6	112.6	112.3	111.6	111.2	110.7	110.4	110.0	109.5	109.4	109.3	109.3	7.7	23.3
15,0°	110.2	109.4	108.5	107.6	106.7	105.9	105.3	104.8	104.3	103.8	103.5	103.2	103.2	9.1	32.4
17,5°	105.0	103.8	102.4	101.3	100.2	99.2	98.4	97.6	97.1	96.8	96.9	96.2	96.4	10.6	43.0
20,0°	98.5	97.2	95.7	94.6	93.8	93.3	93.1	93.2	93.4	93.8	94.3	94.6	93.4	12.0	55.0
22,5°	92.4	91.4	91.0	91.6	93.2	95.2	97.4	99.6	101.2	103.2	104.0	104.7	105.0	13.6	68.6
25,0°	89.4	92.0	95.3	98.4	101.6	104.5	106.4	108.0	109.2	110.0	110.6	110.9	111.2	15.2	83.8
27,5°	97.9	102.1	105.9	109.0	111.2	112.5	113.3	113.5	113.5	113.5	113.3	113.0	113.0	17.0	100.7
30,0°	108.8	113.0	116.2	118.3	118.8	118.2	117.2	115.8	114.3	112.9	111.7	111.2	111.2	18.8	119.5
32,5°	118.5	121.1	122.0	121.4	119.9	118.2	115.9	113.3	110.8	109.2	107.8	107.2	107.2	20.4	139.9
35,0°	122.3	122.7	121.1	118.6	115.7	112.5	109.5	107.0	105.3	104.4	103.8	103.8	103.8	21.9	161.7
37,5°	118.4	116.4	113.4	109.6	106.4	103.8	102.0	100.7	100.3	99.9	100.0	100.1	100.4	23.4	185.1
40,0°	110.4	107.1	103.5	100.0	98.4	96.7	95.8	95.3	95.2	94.7	95.2	94.6	94.6	25.1	210.2
42,5°	102.7	99.2	96.2	94.3	92.6	91.2	90.6	89.9	90.0	89.6	89.5	89.2	89.7	27.1	237.3
45,0°	95.4	92.8	90.7	88.7	87.4	86.1	85.7	85.4	84.8	84.8	84.5	84.5	84.8	20.3	257.5
46,0°	92.3	89.9	88.4	86.8	85.3	84.1	83.6	83.2	82.7	82.6	82.6	82.6	83.5	12.0	269.6
47,0°	89.6	87.7	86.2	84.5	83.2	82.3	81.4	81.2	81.1	80.8	81.1	81.1	81.1	12.4	282.0
48,0°	87.0	85.2	83.9	81.8	81.1	79.9	79.3	79.0	79.2	78.7	79.3	79.2	79.2	12.8	294.8
49,0°	84.3	82.9	81.6	79.7	79.1	77.7	77.2	77.2	77.1	76.8	77.1	77.4	77.4	13.4	308.2
50,0°	81.8	80.2	79.0	77.7	77.4	75.9	75.3	75.1	75.3	75.0	75.3	75.9	75.6	14.0	322.2
51,0°	79.4	78.1	76.5	75.6	75.0	74.1	73.5	73.2	73.4	73.2	73.7	73.7	73.7	14.6	336.8
52,0°	77.0	76.0	74.9	73.8	72.9	72.2	71.6	71.4	71.6	71.6	71.9	71.9	71.9	15.3	352.1
53,0°	74.6	73.9	73.3	71.7	71.0	70.3	69.5	69.5	69.8	69.8	70.0	70.3	70.0	16.1	368.2
54,0°	72.3	71.3	71.3	69.8	69.2	68.5	67.6	67.7	67.9	67.9	68.2	68.2	68.2	17.0	385.2
55,0°	70.3	69.4	69.0	68.0	67.6	66.7	65.8	65.3	65.8	66.1	66.3	66.0	66.3	17.9	403.1
56,0°	68.0	67.5	66.8	66.0	65.8	64.6	63.9	63.3	63.6	63.9	64.5	64.2	64.5	18.8	422.0
57,0°	65.7	65.5	64.9	63.7	63.4	62.5	62.4	61.5	61.8	61.8	62.4	62.7	62.7	19.9	441.8
58,0°	63.8	63.3	63.0	61.9	61.2	60.3	60.0	59.4	59.7	59.9	60.2	60.8	60.8	21.0	462.8
59,0°	62.0	61.4	61.0	59.8	59.1	58.1	57.5	57.2	57.5	57.8	58.4	58.7	59.0	22.0	484.8
60,0°	60.1	59.3	58.7	57.6	56.9	56.0	55.6	55.1	55.4	55.9	56.5	56.8	57.1	23.0	507.8
61,0°	58.2	57.3	56.7	55.5	54.8	53.8	53.5	52.9	53.2	54.1	54.4	54.7	55.3	23.8	531.6
62,0°	56.4	55.5	54.3	53.3	52.6	51.7	51.3	50.8	51.3	51.7	52.2	52.8	52.8	24.5	556.1
63,0°	54.5	53.3	52.1	51.2	50.5	49.3	49.2	48.9	49.2	49.5	50.1	51.0	51.0	25.2	581.3
64,0°	52.7	51.2	50.0	48.8	48.3	47.1	47.1	46.8	47.0	47.4	48.2	48.8	49.1	25.7	607.0
65,0°	50.6	49.0	47.9	46.8	46.5	45.5	45.2	44.6	45.2	45.2	46.1	46.7	46.7	26.2	633.2
66,0°	48.4	47.0	46.5	45.1	44.6	43.8	43.3	42.5	43.1	43.1	43.6	44.2	44.2	26.7	659.9
67,0°	46.5	44.8	44.4	43.1	42.5	41.3	41.2	40.3	40.9	40.9	41.5	41.8	41.8	27.1	687.0
68,0°	44.5	42.9	42.3	41.3	40.3	39.1	38.8	38.5	38.7	38.5	39.3	39.3	39.3	27.6	714.6
69,0°	42.1	40.9	40.2	38.9	38.5	37.2	36.6	36.3	36.3	35.7	36.6	36.6	36.9	27.8	742.4
70,0°	39.7	38.4	37.7	36.7	36.4	35.4	34.8	33.9	33.8	33.5	33.5	33.5	33.8	27.9	770.3
71,0°	37.2	36.0	35.5	34.6	34.0	33.3	32.6	31.4	31.4	31.1	31.0	30.7	30.7	27.9	798.2
72,0°	34.8	33.6	33.4	32.2	31.5	30.8	30.2	29.5	29.2	28.6	28.9	28.3	28.3	27.6	825.8

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
---	--	--------------------------------------

**siteco**

### Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	715.6	779.1	824.2	841.6	838.1	823.1	794.4	762.7	727.5	700.2	667.8	623.7	567.8	507.8	446.5
74,0°	687.5	748.2	799.8	827.2	841.9	842.3	815.9	779.3	729.9	695.6	658.4	612.1	559.6	504.0	445.5
75,0°	651.6	701.3	748.4	774.9	800.0	804.8	799.9	771.0	717.3	674.7	631.6	580.3	534.9	485.6	426.3
76,0°	608.7	647.3	679.5	689.6	708.1	710.0	713.1	701.6	672.4	629.9	588.3	540.1	499.8	449.7	386.9
77,0°	567.9	591.4	613.0	614.5	622.5	621.0	626.0	616.5	596.1	565.6	533.9	486.1	445.6	392.9	336.5
78,0°	472.5	473.8	514.2	501.0	521.9	500.7	505.7	481.3	496.3	476.3	460.8	415.0	376.1	322.9	275.3
79,0°	375.2	360.7	361.2	350.5	357.1	355.1	374.0	364.8	383.9	370.5	367.3	329.3	301.1	249.1	210.3
80,0°	291.2	271.4	261.7	247.3	245.4	241.5	257.1	260.5	281.8	280.8	280.5	257.5	229.9	186.1	151.1
81,0°	190.7	180.2	174.1	167.4	165.9	162.1	162.3	163.6	192.2	200.0	206.8	198.4	180.8	146.2	112.5
82,0°	109.0	99.4	97.8	94.4	98.6	98.3	104.2	106.1	120.4	128.1	136.3	137.1	133.0	115.5	88.6
83,0°	60.8	57.5	59.6	58.3	60.8	58.8	59.1	55.9	72.0	76.5	84.2	85.7	83.9	74.8	66.2
84,0°	29.7	27.9	29.7	29.7	32.8	34.2	37.6	37.0	41.7	44.4	52.4	56.6	55.7	43.5	34.9
85,0°	6.7	6.3	6.4	6.5	8.1	8.4	12.6	14.0	24.2	25.5	28.4	28.0	22.6	11.1	7.3
86,0°	4.9	4.4	4.4	4.4	4.5	4.7	4.8	5.1	10.2	10.5	12.0	11.2	10.9	7.1	5.2
87,0°	3.7	3.8	3.8	3.9	4.0	3.3	3.3	2.5	3.4	2.8	2.8	2.9	2.8	2.4	2.4
88,0°	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.7	2.5	2.5	2.5	2.1	1.7	1.7	1.8
89,0°	2.5	2.5	2.5	2.6	2.5	2.9	2.9	2.1	2.2	1.9	2.0	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	384.7	323.9	274.7	239.4	215.1	193.2	167.1	139.2	111.1	87.1	67.0	58.7	51.8	47.1	43.6
<b>74,0°</b>	377.9	309.4	252.7	215.3	189.7	168.1	138.2	110.5	80.9	60.9	49.0	44.0	40.0	36.3	34.7
<b>75,0°</b>	351.5	282.7	226.5	192.0	166.5	141.4	111.3	81.5	57.4	46.0	37.9	34.6	32.5	31.3	29.1
<b>76,0°</b>	312.4	248.2	198.9	167.2	141.0	114.1	81.3	57.8	41.7	35.9	31.2	27.8	24.7	23.2	20.7
<b>77,0°</b>	268.5	209.2	164.2	137.9	111.2	83.3	56.1	40.2	32.0	27.5	22.3	20.1	17.5	17.1	15.2
<b>78,0°</b>	216.5	171.6	134.8	112.8	83.6	60.3	40.6	30.0	24.3	20.2	17.4	16.0	14.0	12.4	11.2
<b>79,0°</b>	164.5	134.3	106.7	87.7	62.4	43.7	28.4	22.9	16.9	15.1	11.1	10.3	9.0	9.0	7.6
<b>80,0°</b>	121.9	102.2	85.4	65.8	38.8	26.7	20.0	14.8	12.3	9.7	7.5	6.8	6.0	6.0	5.2
<b>81,0°</b>	86.5	76.7	53.2	29.6	21.8	17.2	13.5	10.1	7.4	6.0	5.5	4.8	4.8	4.8	4.8
<b>82,0°</b>	50.7	38.4	30.2	14.8	10.4	10.4	7.9	6.6	5.3	4.7	3.1	3.1	3.5	3.6	3.6
<b>83,0°</b>	36.4	26.3	18.5	10.6	6.5	6.4	6.0	4.8	4.2	3.5	3.5	3.5	1.9	1.8	1.8
<b>84,0°</b>	26.3	9.4	6.3	5.7	4.6	4.6	3.2	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8
<b>85,0°</b>	5.9	4.3	3.1	2.5	2.5	2.5	2.6	1.9	1.8	1.8	1.8	1.8	1.8	1.8	2.1
<b>86,0°</b>	3.0	2.5	2.5	2.5	1.9	1.9	2.0	1.8	2.0	1.8	2.0	2.1	2.1	2.1	1.2
<b>87,0°</b>	1.9	1.8	1.9	1.9	1.2	1.2	1.2	2.0	1.2	2.0	1.2	1.2	1.5	1.2	1.2
<b>88,0°</b>	1.8	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.2	0.6	1.5	1.2
<b>89,0°</b>	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.4	0.4	1.4	0.6	0.6	1.2
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
---	--	--------------------------------------

**siteco**

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
<b>73,0°</b>	40.9	38.8	35.9	34.7	36.5	35.6	35.6	646.5	582.2	504.2	449.0	438.0	435.0	407.6	362.2
<b>74,0°</b>	32.7	29.7	31.1	30.0	30.4	30.7	28.9	621.1	555.2	469.8	416.2	419.3	427.5	399.2	354.9
<b>75,0°</b>	27.7	24.2	22.7	20.9	20.3	19.7	22.1	592.8	525.7	424.7	366.4	376.8	394.9	376.0	331.4
<b>76,0°</b>	19.8	17.8	17.1	17.2	16.3	15.7	16.6	560.0	489.3	371.9	309.5	318.6	343.2	338.3	301.5
<b>77,0°</b>	15.2	13.8	12.9	13.5	13.2	12.9	12.9	519.9	438.9	306.8	253.0	262.1	291.9	295.5	267.3
<b>78,0°</b>	11.2	10.7	10.7	9.2	9.8	8.3	9.8	440.2	374.7	243.6	203.4	215.0	245.6	254.7	228.1
<b>79,0°</b>	7.9	7.0	7.0	6.1	7.0	6.1	7.4	371.6	318.4	205.4	175.1	187.0	210.9	219.8	201.7
<b>80,0°</b>	4.3	4.6	4.6	4.6	4.6	4.6	4.9	295.3	256.2	170.4	156.9	164.0	177.3	179.6	153.7
<b>81,0°</b>	4.9	4.0	4.0	4.3	4.3	4.3	3.7	196.2	181.0	135.4	134.7	137.2	138.3	133.0	114.9
<b>82,0°</b>	3.6	3.6	3.4	2.5	2.5	2.5	3.1	123.5	127.4	97.7	98.0	93.8	90.5	81.3	58.9
<b>83,0°</b>	1.8	1.8	2.7	2.8	2.8	2.5	2.5	67.1	71.7	45.5	36.9	29.9	35.8	35.3	34.5
<b>84,0°</b>	2.1	1.8	2.1	2.1	2.1	3.1	2.5	31.6	32.3	21.5	12.4	8.9	12.9	14.0	6.8
<b>85,0°</b>	1.0	2.1	1.2	1.2	1.2	1.2	1.8	6.1	7.0	6.4	6.3	5.8	6.0	5.6	5.5
<b>86,0°</b>	2.1	1.2	1.2	1.2	1.2	1.2	1.2	4.8	4.8	4.7	4.6	4.5	4.4	4.4	4.0
<b>87,0°</b>	1.2	1.5	1.2	1.2	1.2	1.2	1.2	3.6	3.6	3.6	3.5	3.5	3.4	3.4	3.4
<b>88,0°</b>	1.5	0.6	1.2	1.2	1.2	1.2	1.2	3.0	3.0	3.0	2.9	2.9	2.8	2.8	2.8
<b>89,0°</b>	0.3	0.6	1.2	1.2	1.2	1.2	1.2	2.4	2.4	2.3	2.3	2.3	2.2	2.2	1.8
<b>90,0°</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	298.6	218.2	138.7	84.4	60.2	52.1	46.6	43.7	42.7	40.7	38.5	35.7	34.5	33.6	33.1
74,0°	281.3	196.9	122.6	72.2	53.6	47.3	42.4	39.9	37.9	36.9	34.5	33.1	31.9	30.8	30.6
75,0°	253.8	172.0	102.0	61.9	48.2	42.3	38.0	35.0	33.6	32.2	30.9	29.7	28.9	28.4	28.0
76,0°	224.6	146.8	83.4	52.6	43.1	38.9	35.1	31.8	30.0	29.2	27.9	27.1	26.0	26.2	25.1
77,0°	192.0	120.5	63.4	43.5	37.1	34.0	29.9	30.0	27.5	26.6	25.3	24.1	23.5	23.3	22.7
78,0°	161.3	92.1	50.8	36.0	30.8	28.7	26.1	25.2	23.2	22.5	21.8	21.6	21.0	20.8	20.2
79,0°	136.9	76.0	40.2	30.0	26.0	23.8	21.8	21.0	20.2	19.4	18.7	18.6	18.3	17.7	17.6
80,0°	100.6	53.0	29.4	23.9	21.0	18.9	18.1	17.3	17.1	15.7	15.1	15.5	14.9	14.7	14.5
81,0°	73.0	38.3	22.0	18.1	16.0	15.2	13.8	13.6	13.4	12.7	12.6	12.4	12.3	11.7	11.7
82,0°	38.4	22.2	15.0	14.0	12.3	11.4	10.7	10.5	10.4	9.7	9.5	9.5	9.2	9.1	9.0
83,0°	22.1	12.6	9.5	8.6	8.5	8.3	7.5	7.4	7.3	7.2	6.5	6.9	6.3	6.2	6.1
84,0°	6.9	6.6	6.1	6.0	5.9	5.8	5.7	5.6	5.5	4.8	4.1	4.0	3.9	3.9	3.8
85,0°	4.8	5.3	3.9	3.8	3.9	3.9	3.8	3.7	3.1	3.6	2.5	2.4	2.3	2.2	2.1
86,0°	3.1	4.1	3.3	3.2	2.5	2.5	2.5	2.5	2.4	2.4	2.4	1.8	1.7	1.2	1.2
87,0°	3.3	2.5	2.5	2.6	2.5	2.5	1.8	1.9	1.8	1.8	1.8	1.2	1.2	1.2	1.2
88,0°	2.7	2.7	2.6	1.9	2.6	1.9	1.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	2.1	1.8	1.8	1.8	2.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	32.3	31.3	31.0	29.7	29.3	28.4	27.8	27.4	26.8	26.4	26.1	25.5	25.8	27.2	852.9
74,0°	29.9	29.2	28.5	27.3	26.9	25.7	25.3	24.4	24.0	23.4	23.0	22.1	22.7	26.3	879.2
75,0°	27.5	26.6	26.1	24.8	24.1	22.9	22.5	21.0	20.3	18.5	18.1	16.9	17.2	24.6	903.7
76,0°	25.0	23.8	23.6	22.4	21.6	19.6	18.6	16.4	15.1	12.4	11.7	9.8	10.4	22.1	925.9
77,0°	22.5	21.3	20.9	19.6	18.4	15.6	14.0	11.5	10.2	8.0	6.8	4.9	5.5	19.4	945.3
78,0°	20.1	18.8	17.9	16.5	14.6	12.1	10.5	8.3	6.8	5.8	4.0	3.1	3.1	16.0	961.3
79,0°	17.4	16.3	15.0	13.7	11.6	9.4	8.3	6.5	4.9	4.0	2.8	1.8	1.8	12.5	973.9
80,0°	14.6	13.9	12.6	11.3	9.0	7.4	6.5	4.9	4.0	2.5	2.1	1.2	1.2	9.5	983.4
81,0°	11.9	11.0	9.9	8.8	7.4	5.9	5.0	4.0	3.4	1.5	1.5	1.2	1.2	6.8	990.2
82,0°	8.9	7.8	7.1	6.4	5.7	4.4	3.5	3.1	2.5	1.2	1.2	1.2	1.2	4.4	994.6
83,0°	5.8	5.3	4.6	4.2	3.5	2.9	2.2	2.2	1.5	1.2	1.2	1.2	1.2	2.6	997.1
84,0°	3.3	2.9	2.4	2.4	2.2	1.6	1.6	1.6	1.2	1.2	1.2	0.9	1.2	1.4	998.5
85,0°	2.1	1.2	1.2	1.2	1.6	1.2	1.2	1.2	0.9	0.9	0.9	0.6	1.2	0.6	999.1
86,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.7	0.9	0.3	0.9	0.3	0.6	0.3	999.4
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.3	0.6	0.6	1.2	0.3	0.0	0.2	999.7
88,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.0	0.9	1.2	0.3	0.0	0.2	999.8
89,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.9	0.9	0.3	0.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> 59080_738
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9750	71.0	75.2	73.1
95	241	252	9251	66.0	69.9	68.0
90	229	250	8790	61.7	65.3	63.5
85	216	248	8291	57.1	60.4	58.8
80	203	246	7792	52.8	55.8	54.3
75	190	243	7293	48.6	51.4	50.0
70	178	241	6833	44.8	47.4	46.1
65	165	238	6334	41.0	43.3	42.2
60	152	235	5835	37.3	39.3	38.3
55	140	232	5374	33.9	35.8	34.8
50	127	229	4875	30.4	32.0	31.2
45	114	225	4376	27.1	28.5	27.8
40	102	221	3915	24.1	25.4	24.8
35	89	216	3416	20.9	22.0	21.4
30	76	210	2917	18.0	18.9	18.4
25	63	203	2418	15.1	15.8	15.4
20	51	195	1958	12.5	13.1	12.8
15	38	184	1459	9.6	10.1	9.8
11	28	173	1075	7.4	7.7	7.6

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9750	69.1	72.1	70.6
95	241	252	9251	64.5	67.3	65.9
90	229	250	8790	60.4	63.0	61.7
85	216	248	8291	56.1	58.5	57.3
80	203	246	7792	51.9	54.1	53.0
75	191	244	7331	48.3	50.3	49.3
70	178	241	6832	44.3	46.2	45.2
65	165	238	6333	40.6	42.3	41.4
60	152	235	5834	37.0	38.5	37.8
55	140	232	5374	33.7	35.1	34.4
50	127	229	4875	30.3	31.5	30.9
45	114	225	4376	27.0	28.1	27.6
40	102	221	3915	24.0	25.1	24.6
35	89	216	3416	20.9	21.7	21.3
30	76	210	2917	18.0	18.7	18.4
25	64	204	2457	15.4	15.9	15.6
20	51	195	1958	12.5	13.0	12.8
15	38	184	1459	9.7	10.1	9.9
11	28	173	1075	7.4	7.6	7.5

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> 59080_738
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9750	69.8	73.0	71.4
95	241	252	9251	65.1	67.9	66.5
90	229	250	8790	60.9	63.5	62.2
85	216	248	8291	56.5	58.9	57.7
80	203	246	7792	52.3	54.4	53.4
75	191	244	7332	48.5	50.5	49.5
70	178	241	6833	44.6	46.4	45.5
65	165	238	6334	40.7	42.4	41.6
60	152	235	5835	37.1	38.6	37.8
55	140	232	5374	33.8	35.1	34.4
50	127	229	4875	30.3	31.5	30.9
45	114	225	4376	27.0	28.1	27.6
40	102	221	3915	24.1	25.0	24.6
35	89	216	3416	21.0	21.8	21.4
30	76	210	2917	18.0	18.6	18.3
25	64	204	2457	15.3	15.8	15.6
20	51	195	1958	12.5	12.9	12.7
15	38	184	1459	9.7	10.0	9.8
11	28	173	1075	7.4	7.7	7.6

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2A31Y08HB</b> <b>EAN: 4058352923160</b>	<b>LP number</b> <b>59080_738</b>
--	--	--------------------------------------

**Luminousfluxs table** **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	9750.0	71.0
5.0	9750.0	69.1
15.0	9750.0	69.8