


Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Version	post-top- or mounting to wall arm, shielding on building side, Smart Interface down	serial documentation 11.09.2023
Optic	asymmetric, wide distribution (ST1.2a)	
Cover	cover transparent, PMMA	
Lamps	LED 3000 K CRI ≥ 70	
Controlgear	EVG SITECO iQ - Smart Interface	
Rated values	Net luminous flux = 1510 lm Power consumption = 10.7 W Luminous efficacy = 141.1 lm/W	



Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 762 cd/klm**

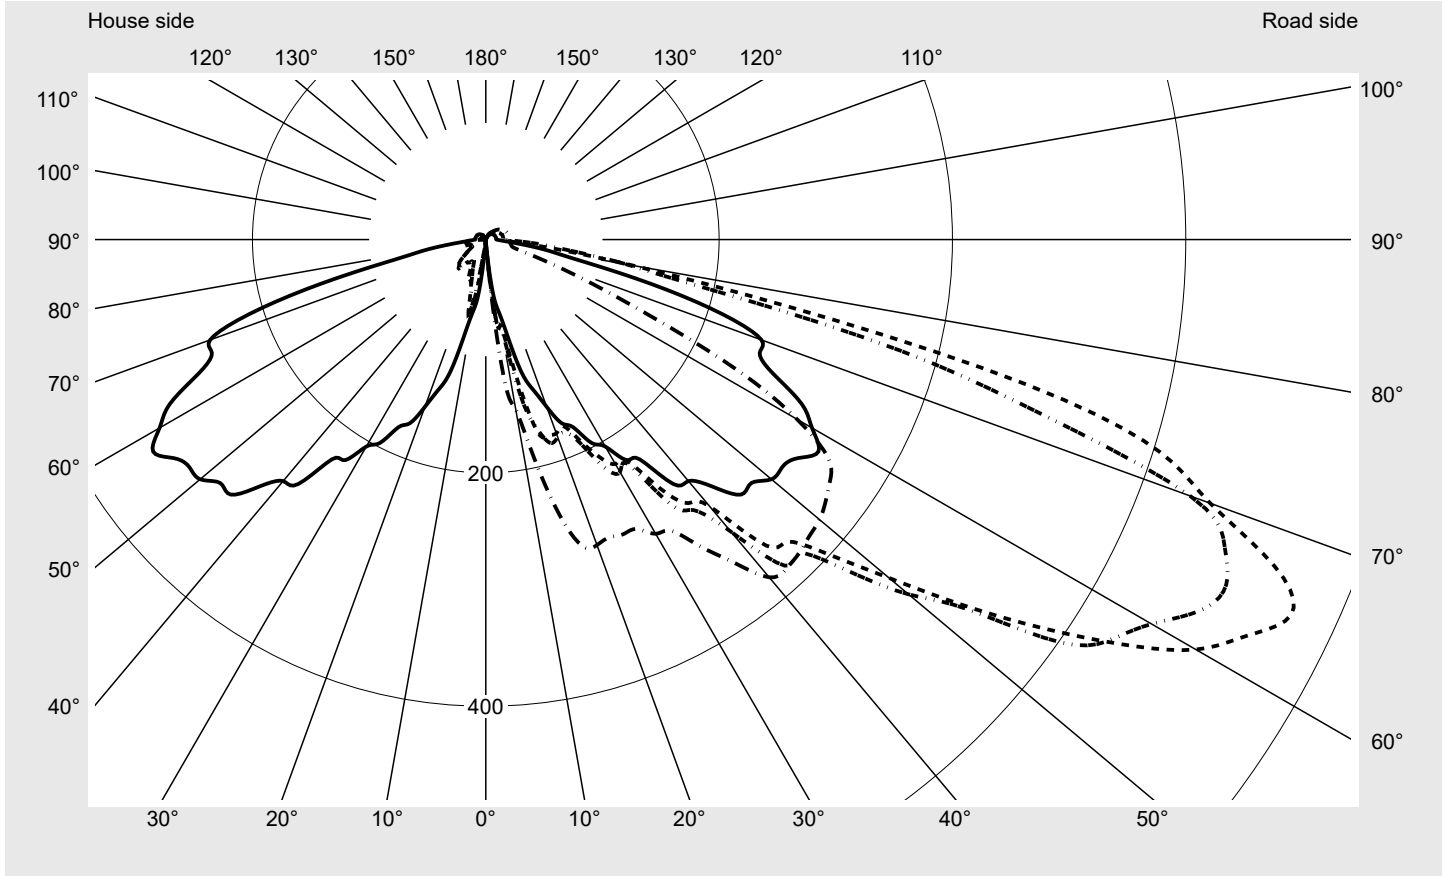

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.3%
Eta 90° - 180°	4.7%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	660.8
Imax 80°	154.4
Imax 90°	20.3
Imax >90°	20.3
Imax >95°	20.1


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
---------------------------	---	------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

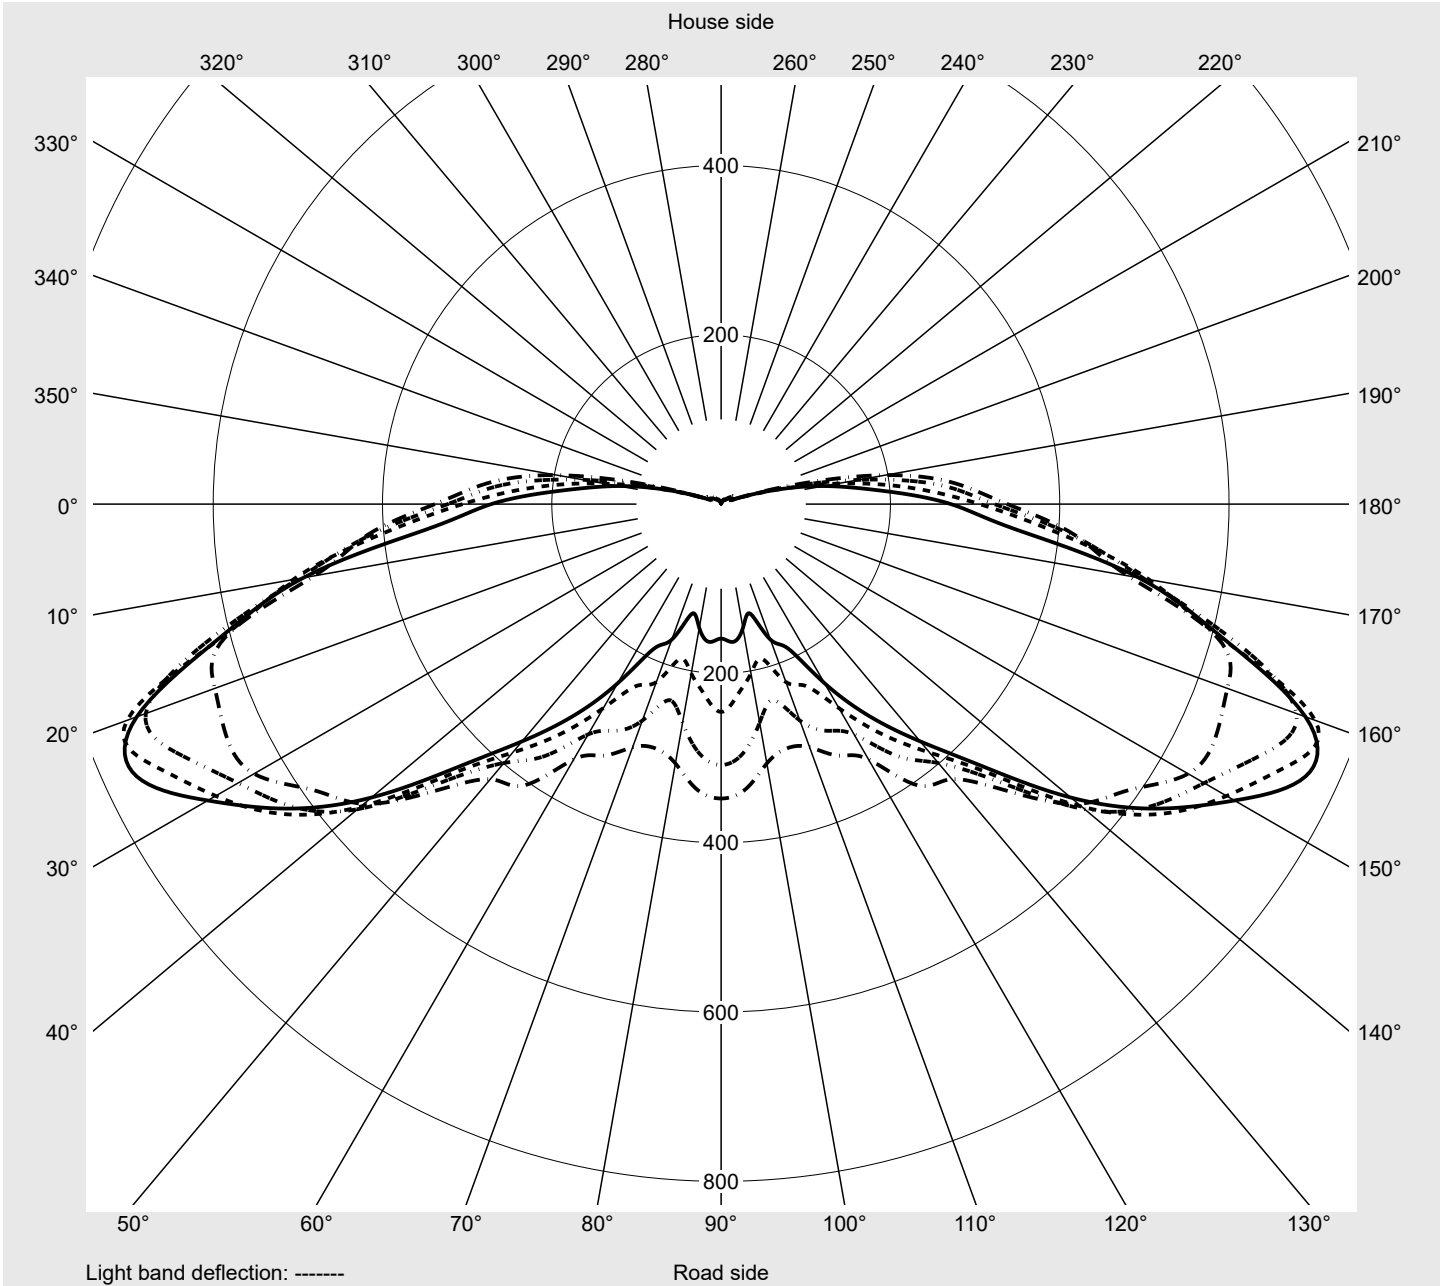

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	4.4	4.4	4.7	4.9	5.1	5.2	5.6	5.8	5.9	6.1	6.1	6.4	6.4
5,0°	9.7	11.2	12.9	14.1	15.4	17.9	21.2	24.7	27.1	29.6	30.8	31.3	31.2
7,5°	45.0	52.8	60.1	64.5	69.6	72.6	72.8	70.1	69.9	70.9	72.8	76.5	85.0
10,0°	62.1	66.5	68.9	72.8	75.3	75.5	77.5	83.3	91.4	105.8	119.2	126.1	132.6
12,5°	82.1	84.1	90.4	96.7	103.8	118.7	136.0	155.1	162.9	158.8	154.2	158.1	165.6
15,0°	117.2	121.9	138.5	149.0	162.4	170.2	166.8	172.5	178.6	179.8	180.5	186.6	190.3
17,5°	134.9	153.4	167.4	175.2	174.1	176.3	182.7	192.5	192.2	192.8	200.8	204.5	208.1
20,0°	152.5	162.5	166.6	173.4	177.3	176.8	180.1	177.9	188.8	192.3	195.2	202.3	209.3
22,5°	170.5	182.3	183.7	178.6	177.1	173.0	179.0	188.4	194.7	193.5	206.9	215.5	222.1
25,0°	177.6	181.5	195.7	193.7	197.9	189.3	193.4	202.7	209.4	214.9	219.1	231.1	245.5
27,5°	196.6	211.3	201.3	200.5	202.7	209.6	220.3	223.5	231.4	234.5	245.8	254.0	266.0
30,0°	204.9	212.0	221.5	215.2	215.7	222.1	230.1	252.1	257.5	261.6	270.2	284.8	292.2
32,5°	224.2	227.6	220.4	221.8	222.5	224.5	229.1	248.2	268.9	281.7	290.5	304.3	309.7
35,0°	229.9	237.4	247.2	237.2	249.2	260.2	278.0	295.6	305.6	326.4	332.9	335.4	343.5
37,5°	264.1	262.1	254.5	264.3	275.1	284.8	292.2	315.6	334.2	343.5	360.6	362.7	368.4
40,0°	270.2	270.7	270.1	268.4	277.3	298.5	326.8	342.9	362.2	376.7	378.2	391.4	396.5
42,5°	287.0	288.5	300.2	304.9	323.7	355.7	379.1	396.0	407.4	422.1	421.9	420.9	412.6
45,0°	309.2	301.5	308.8	309.3	329.1	366.2	380.3	411.3	434.8	448.2	453.8	431.7	430.9
47,5°	308.8	309.2	323.6	337.8	358.6	400.1	419.6	450.9	455.4	456.8	461.4	445.3	443.3
50,0°	319.7	342.0	368.4	399.2	393.8	451.2	473.1	485.8	468.7	461.5	458.7	444.6	432.1
52,5°	320.3	368.9	398.4	476.6	470.9	514.0	520.5	525.9	498.4	481.9	459.0	446.3	414.3
55,0°	326.6	395.0	425.6	538.7	556.5	579.5	602.2	555.0	535.9	486.6	451.6	431.7	375.9
57,5°	338.1	419.6	488.0	606.1	636.4	645.4	637.1	588.7	550.8	479.5	424.1	405.7	348.1
60,0°	322.9	415.5	507.3	629.2	723.3	702.8	659.0	621.5	560.8	463.4	399.2	363.3	314.1
62,5°	305.4	402.1	513.3	612.1	746.8	735.5	689.4	637.5	556.0	450.7	383.1	331.8	278.2
65,0°	271.6	351.5	501.2	614.6	734.6	761.6	700.3	627.1	539.3	438.9	365.9	306.1	244.3
67,5°	254.1	307.3	450.7	571.3	709.1	731.9	685.4	611.9	514.7	406.5	341.7	278.2	208.1
70,0°	251.4	326.1	450.5	563.1	644.7	660.8	642.5	541.6	452.2	369.9	306.8	245.5	179.1
72,5°	212.8	328.5	389.6	530.8	607.8	606.1	503.0	453.1	364.9	290.2	232.6	189.8	151.9
75,0°	146.5	260.4	336.6	456.0	486.6	479.5	368.1	318.6	216.5	190.6	183.7	170.3	141.9
77,5°	81.4	146.5	219.6	291.4	322.2	266.2	195.4	173.2	146.3	131.2	131.4	131.4	122.1
80,0°	54.0	73.5	108.7	132.1	154.4	127.7	122.8	133.6	104.0	75.5	57.7	51.3	60.3
82,5°	30.8	39.8	45.0	58.1	67.4	57.2	73.7	95.3	78.9	50.5	31.5	27.4	22.5
85,0°	16.9	19.0	17.8	17.6	18.3	24.9	47.6	58.2	45.0	29.5	23.5	21.5	20.1
87,5°	11.7	12.2	13.2	14.4	16.6	19.8	25.2	27.3	22.2	19.3	19.6	19.6	19.5
90,0°	9.1	10.5	11.5	12.5	14.1	15.2	16.3	17.1	17.6	18.3	18.6	19.0	19.1
92,5°	9.1	10.5	11.3	12.4	13.9	15.1	16.3	16.9	17.6	18.1	18.5	19.0	19.1
95,0°	9.1	10.2	11.2	12.4	13.7	15.1	16.1	16.9	17.6	18.1	18.5	18.8	19.1
97,5°	9.0	10.2	11.2	12.4	13.7	14.9	15.9	16.9	17.6	17.9	18.5	18.8	19.1
100,0°	9.0	10.2	11.2	12.0	13.7	14.9	15.9	16.8	17.3	17.9	18.3	18.6	18.8
102,5°	8.8	10.0	11.2	12.0	13.5	14.9	15.7	16.6	17.3	17.8	18.1	18.5	18.8
105,0°	8.8	10.0	10.8	12.0	13.4	14.6	15.6	16.4	16.9	17.4	17.8	18.5	18.6
107,5°	8.6	9.8	10.8	11.7	13.2	14.2	15.2	16.1	16.8	17.1	17.8	18.1	18.3
110,0°	8.5	9.7	10.5	11.5	12.9	13.9	14.9	15.7	16.4	16.8	17.4	17.8	17.9
112,5°	8.5	9.5	10.5	11.2	12.5	13.5	14.4	15.2	15.9	16.4	16.9	17.3	17.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	6.8	6.6	6.8	6.8	6.8	6.8	4.2	4.1	4.1	4.1	3.9	3.9	3.9
5,0°	29.5	28.6	26.9	25.7	24.9	24.0	8.6	8.0	7.1	6.4	5.8	5.4	4.7
7,5°	95.5	104.8	107.9	110.7	121.1	120.9	38.6	29.0	19.6	14.6	9.7	6.9	5.8
10,0°	139.5	141.2	143.2	142.4	144.4	148.0	62.8	68.7	66.4	56.2	42.2	27.3	17.1
12,5°	173.4	187.6	189.6	187.8	189.8	192.3	75.3	72.0	64.7	60.6	63.3	65.5	59.9
15,0°	203.8	219.1	230.1	235.3	244.7	244.5	106.8	93.3	71.3	55.4	52.8	50.3	48.8
17,5°	215.0	228.7	245.2	259.4	269.7	275.3	117.8	101.4	70.3	46.7	42.5	41.3	40.1
20,0°	222.0	237.4	255.0	269.0	275.8	278.7	137.5	122.2	82.8	44.5	37.8	34.5	31.2
22,5°	230.6	238.2	253.1	267.3	275.6	276.3	158.5	144.3	100.4	49.8	39.8	29.6	24.0
25,0°	255.2	258.9	266.2	275.6	278.7	278.7	165.4	147.6	101.1	40.3	33.9	25.6	20.7
27,5°	274.8	277.2	283.9	286.1	282.1	279.7	183.9	160.7	107.7	32.8	28.3	21.8	19.0
30,0°	301.5	299.0	292.9	291.6	288.3	291.2	191.3	178.6	112.3	28.1	23.9	20.1	18.3
32,5°	320.3	315.1	304.6	301.0	301.5	296.0	217.2	193.9	119.2	26.9	22.0	19.8	18.5
35,0°	343.9	333.4	323.0	320.7	322.0	321.4	214.5	189.8	119.2	29.1	23.9	19.8	19.1
37,5°	372.7	369.8	355.6	344.9	349.3	348.8	245.3	211.1	133.1	30.3	24.7	23.0	22.7
40,0°	402.8	393.8	362.5	357.1	369.9	377.9	248.9	219.1	135.6	31.7	26.6	25.7	25.1
42,5°	421.9	400.8	369.8	371.8	380.1	382.0	274.3	222.1	133.2	34.7	33.5	29.1	28.1
45,0°	429.5	404.0	367.7	372.8	381.1	379.9	299.8	242.8	144.6	34.2	32.5	34.0	32.7
47,5°	432.2	391.4	366.7	374.0	380.3	376.2	295.8	225.4	126.6	32.3	30.8	31.7	31.8
50,0°	424.6	377.7	358.8	368.4	376.5	373.5	296.1	225.4	121.9	28.8	27.4	28.6	25.9
52,5°	402.6	364.0	349.6	357.6	369.1	367.4	292.9	227.2	114.1	25.6	23.9	24.2	21.8
55,0°	365.2	342.2	335.1	342.5	359.6	360.3	295.3	222.6	101.9	22.7	20.0	20.7	18.8
57,5°	327.8	305.6	298.8	311.0	337.6	347.8	278.5	197.1	84.0	20.1	17.3	17.6	16.6
60,0°	295.4	272.1	239.7	262.1	295.6	308.1	259.4	164.9	71.1	17.3	14.2	14.7	14.7
62,5°	237.0	223.7	189.5	203.2	225.9	245.5	223.5	139.7	61.0	17.6	13.7	13.0	12.4
65,0°	188.8	170.3	134.3	148.5	163.4	158.8	186.7	122.9	62.5	19.5	14.6	13.5	11.5
67,5°	154.2	119.5	84.1	95.0	100.6	98.2	176.9	113.4	59.8	19.8	15.2	13.4	10.8
70,0°	129.5	92.1	51.6	48.4	51.6	56.6	170.7	112.1	60.1	17.6	13.5	11.9	10.2
72,5°	106.0	60.4	35.6	29.3	28.4	30.5	149.8	102.9	56.2	20.1	15.4	12.2	10.5
75,0°	86.2	34.4	27.4	24.0	23.5	23.4	102.9	74.5	49.3	23.5	21.0	16.1	12.0
77,5°	53.3	26.6	23.2	22.2	22.2	22.3	57.9	48.6	42.3	23.0	20.7	16.3	11.7
80,0°	24.4	22.2	21.5	21.5	21.5	21.7	44.7	42.0	34.2	22.2	19.5	17.3	12.9
82,5°	21.0	20.5	20.7	20.8	21.0	21.0	28.8	26.6	23.9	17.4	15.9	13.2	10.2
85,0°	20.0	20.0	20.3	20.5	20.7	20.7	15.6	15.6	16.6	17.4	15.7	13.0	8.8
87,5°	19.6	20.0	20.1	20.5	20.5	20.3	11.0	11.0	11.7	11.7	10.7	9.1	7.6
90,0°	19.5	19.8	20.1	20.1	20.3	20.3	8.0	6.6	5.4	4.7	4.1	3.7	3.4
92,5°	19.5	19.8	20.1	20.1	20.3	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
95,0°	19.5	19.8	20.0	20.1	20.1	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
97,5°	19.5	19.5	19.8	20.1	20.1	20.0	7.8	6.4	5.1	4.6	3.9	3.6	3.2
100,0°	19.1	19.5	19.8	20.0	20.1	20.0	7.8	6.4	5.2	4.6	4.1	3.6	3.4
102,5°	19.1	19.5	19.8	19.8	20.0	19.6	7.8	6.4	5.2	4.4	3.9	3.6	3.0
105,0°	18.8	19.1	19.5	19.6	19.6	19.6	7.6	6.3	5.1	4.4	3.9	3.6	3.2
107,5°	18.6	18.8	19.1	19.5	19.3	19.3	7.5	6.1	5.1	4.4	3.9	3.6	3.0
110,0°	18.3	18.6	18.8	19.1	19.1	19.0	7.5	6.1	5.1	4.4	3.9	3.6	3.0
112,5°	17.8	18.1	18.5	18.6	18.6	18.6	7.5	6.1	5.1	4.4	3.9	3.6	3.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	0.0	0.0
2,5°	3.9	3.9	3.9	4.2	4.4	4.7	4.4	4.2	4.2	3.9	3.7	0.1	0.1
5,0°	4.4	4.1	3.9	3.7	3.6	3.4	3.4	3.4	3.4	3.2	3.0	0.3	0.4
7,5°	4.7	3.9	3.7	3.6	3.4	3.6	3.6	3.4	3.2	3.2	3.0	1.6	2.0
10,0°	11.7	8.5	5.6	4.4	3.4	2.9	2.7	2.5	2.4	2.2	2.0	3.1	5.1
12,5°	43.5	27.3	15.1	7.1	3.7	3.2	2.5	2.2	1.9	1.9	1.7	5.4	10.5
15,0°	48.1	50.6	46.2	29.8	12.0	4.6	2.2	1.7	1.5	1.5	1.7	8.0	18.5
17,5°	38.3	36.6	35.2	24.2	14.6	6.9	2.0	1.7	1.5	1.5	1.4	9.9	28.4
20,0°	29.3	27.3	26.6	17.6	10.3	4.9	1.9	1.7	1.5	1.5	1.4	11.4	39.8
22,5°	22.2	21.3	18.8	13.2	7.6	3.9	1.7	1.5	1.4	1.2	1.4	13.1	52.9
25,0°	19.1	17.3	15.6	11.2	6.4	3.4	1.7	1.5	1.4	1.2	1.0	15.3	68.2
27,5°	18.1	15.9	15.1	10.7	5.8	3.4	1.7	1.5	1.4	1.2	1.0	17.8	86.0
30,0°	17.9	16.8	15.7	11.3	5.8	3.2	1.9	1.5	1.4	1.2	1.0	20.6	106.6
32,5°	18.1	17.4	16.1	11.2	6.4	3.4	1.9	1.5	1.4	1.2	1.0	23.2	129.7
35,0°	19.8	17.8	16.1	11.5	7.1	3.7	1.9	1.4	1.4	1.2	1.0	27.0	156.7
37,5°	20.0	18.3	15.7	11.5	7.8	3.9	1.7	1.5	1.4	1.2	1.0	31.2	187.9
40,0°	23.9	20.1	14.9	11.2	9.0	4.4	1.9	1.4	1.2	1.2	1.0	34.8	222.7
42,5°	26.2	20.8	15.9	12.2	8.8	5.4	2.2	1.5	1.2	1.0	1.0	39.6	262.3
45,0°	27.3	21.0	15.6	11.9	9.3	5.2	2.7	2.0	1.2	1.0	1.0	43.0	305.3
47,5°	27.4	20.1	14.7	11.3	9.3	5.4	2.5	1.9	1.4	1.0	1.0	45.9	351.2
50,0°	21.8	17.8	13.7	10.7	9.5	5.6	2.5	1.9	1.4	1.0	1.0	49.2	400.4
52,5°	18.8	15.1	11.7	9.3	8.5	5.8	2.7	1.9	1.2	1.0	1.0	52.7	453.1
55,0°	16.3	13.4	10.0	8.1	7.3	5.2	2.7	2.0	1.2	1.0	0.7	55.9	509.0
57,5°	14.2	11.3	8.3	7.1	6.4	4.9	2.7	1.9	1.2	0.8	0.7	57.9	566.8
60,0°	12.0	9.0	6.8	6.3	5.9	4.2	2.5	1.9	1.2	1.0	0.7	58.1	624.9
62,5°	10.3	7.6	5.9	5.4	5.4	4.1	2.7	1.9	1.2	1.0	0.7	56.5	681.5
65,0°	9.0	7.1	5.9	5.2	5.1	4.1	2.9	2.0	1.5	1.2	1.0	53.9	735.4
67,5°	8.8	7.3	5.9	5.1	4.9	4.2	3.0	2.2	1.7	1.4	1.0	50.1	785.6
70,0°	8.8	7.3	5.9	5.1	4.6	4.1	3.0	2.4	1.9	1.5	1.4	46.3	831.9
72,5°	8.6	6.8	5.6	4.6	4.1	3.7	2.9	2.2	1.9	1.5	1.4	40.3	872.2
75,0°	9.5	6.3	5.1	4.2	3.6	3.0	2.5	2.0	1.9	1.7	1.4	31.6	903.8
77,5°	8.3	5.8	4.4	3.7	3.0	2.5	2.2	1.9	1.7	1.4	1.4	20.6	924.4
80,0°	8.1	5.1	3.9	3.2	2.7	2.4	2.0	1.7	1.4	1.4	1.4	12.0	936.5
82,5°	8.1	4.6	3.4	2.9	2.4	2.0	1.9	1.5	1.4	1.4	1.4	7.2	943.7
85,0°	5.9	4.1	3.0	2.5	2.2	1.9	1.7	1.5	1.4	1.4	1.4	4.6	948.3
87,5°	5.6	3.4	2.7	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	3.4	951.7
90,0°	3.0	2.7	2.5	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	2.8	954.4
92,5°	3.0	2.7	2.4	2.4	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.8	957.2
95,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	960.0
97,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	962.7
100,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	965.4
102,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.6	968.0
105,0°	3.0	2.7	2.4	2.2	1.9	1.7	1.5	1.5	1.4	1.4	1.4	2.6	970.6
107,5°	2.7	2.5	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.5	973.1
110,0°	2.9	2.7	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.4	975.6
112,5°	2.9	2.7	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	1.0	2.3	977.9

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.5	9.5	10.3	11.2	12.2	13.2	14.1	14.7	15.4	16.1	16.4	16.8	17.1
117,5°	8.1	9.1	10.2	10.8	11.9	12.7	13.7	14.4	14.9	15.4	15.9	16.3	16.6
120,0°	8.1	9.1	9.8	10.5	11.3	12.4	13.0	13.7	14.4	14.7	15.2	15.7	15.9
122,5°	7.8	8.8	9.7	10.2	10.8	11.7	12.4	13.0	13.5	14.1	14.6	14.9	15.2
125,0°	7.6	8.5	9.3	9.8	10.3	11.0	11.9	12.4	12.9	13.4	13.7	14.1	14.2
127,5°	7.5	8.1	9.0	9.3	10.0	10.7	11.2	11.7	12.2	12.5	13.0	13.2	13.5
130,0°	7.1	7.8	8.6	9.0	9.5	10.0	10.7	11.0	11.5	11.9	12.2	12.5	12.7
132,5°	6.8	7.5	8.1	8.5	9.0	9.5	10.0	10.3	10.8	11.2	11.3	11.7	11.9
135,0°	6.3	6.9	7.6	8.0	8.3	8.8	9.3	9.7	9.8	10.2	10.5	10.8	10.8
137,5°	5.9	6.6	7.1	7.6	7.8	8.1	8.5	8.8	9.1	9.5	9.7	9.8	9.8
140,0°	5.6	6.3	6.6	6.9	7.3	7.6	7.8	8.1	8.5	8.5	8.8	9.0	9.0
142,5°	5.2	5.9	6.3	6.6	6.8	6.9	7.1	7.5	7.6	7.8	8.0	8.1	8.1
145,0°	4.9	5.4	5.8	5.9	6.3	6.4	6.4	6.8	6.8	7.1	7.1	7.3	7.5
147,5°	4.7	4.9	5.2	5.4	5.8	5.8	6.1	6.1	6.4	6.4	6.4	6.8	6.8
150,0°	4.2	4.4	4.6	4.7	5.1	5.1	5.4	5.4	5.4	5.8	5.8	5.8	5.8
152,5°	3.6	3.7	4.1	4.1	4.4	4.4	4.4	4.6	4.7	4.7	4.7	4.7	4.9
155,0°	2.7	3.0	3.0	3.4	3.4	3.4	3.6	3.6	3.7	3.7	3.7	3.7	3.7
157,5°	2.0	2.0	2.4	2.4	2.4	2.4	2.5	2.4	2.5	2.7	2.7	2.7	2.7
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.2	1.4	1.4	1.4	1.4
170,0°	1.2	1.0	1.2	1.2	1.0	1.2	1.2	1.2	1.2	1.2	1.2	1.0	1.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	17.4	17.6	17.9	18.1	18.3	18.3	7.3	6.1	5.1	4.6	3.9	3.6	3.2
117,5°	16.8	17.1	17.4	17.4	17.6	17.6	7.1	6.1	5.1	4.6	4.1	3.6	3.2
120,0°	16.3	16.6	16.8	16.9	16.9	16.9	7.1	6.1	5.2	4.6	4.1	3.7	3.4
122,5°	15.4	15.6	15.7	15.9	15.9	15.9	6.9	5.9	4.9	4.6	4.1	3.6	3.4
125,0°	14.6	14.9	14.9	14.9	15.1	14.9	6.8	5.9	4.9	4.6	4.1	3.7	3.4
127,5°	13.9	13.9	14.1	14.2	14.2	14.2	6.6	5.8	4.9	4.4	4.1	3.6	3.4
130,0°	12.9	12.9	13.0	13.2	13.2	13.2	6.3	5.6	4.9	4.2	3.9	3.6	3.2
132,5°	11.9	12.0	12.2	12.2	12.2	12.2	5.9	5.2	4.6	4.1	3.7	3.4	3.0
135,0°	11.0	11.2	11.2	11.2	11.2	11.2	5.8	5.1	4.6	3.9	3.7	3.2	3.0
137,5°	10.2	10.2	10.2	10.2	10.2	10.2	5.4	4.9	4.2	3.7	3.4	3.2	2.7
140,0°	9.1	9.1	9.1	9.1	9.1	9.1	5.2	4.6	4.1	3.7	3.4	2.9	2.7
142,5°	8.1	8.1	8.1	8.1	8.1	8.5	4.9	4.4	3.9	3.6	3.2	3.0	2.7
145,0°	7.5	7.5	7.5	7.5	7.5	7.5	4.7	4.2	3.9	3.6	3.2	2.9	2.5
147,5°	6.8	6.8	6.8	6.8	6.8	6.8	4.4	4.1	3.7	3.4	3.0	2.7	2.5
150,0°	5.8	5.8	5.9	5.8	5.8	5.8	3.9	3.6	3.2	3.0	2.7	2.5	2.4
152,5°	5.1	5.1	4.9	4.7	4.7	4.7	3.4	3.0	2.7	2.5	2.4	2.2	2.0
155,0°	3.7	3.7	3.7	3.7	3.7	3.7	2.7	2.4	2.4	2.0	2.0	1.7	1.7
157,5°	2.7	2.7	2.7	2.7	2.7	2.7	2.0	2.0	1.7	1.7	1.7	1.7	1.5
160,0°	1.7	1.7	1.9	1.7	1.7	1.7	1.7	1.7	1.5	1.4	1.5	1.4	1.4
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.5	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.2	1.0	1.2	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4
170,0°	1.4	1.0	1.2	1.4	1.2	1.0	1.2	1.2	1.2	1.2	1.4	1.4	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
---------------------------	---	------------------------------

siteco

Table of values for luminous intensities													Maximum luminous intensity	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone	
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm		
115,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.3	980.2	
117,5°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.2	982.3	
120,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	2.1	984.4	
122,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.4	1.9	986.3	
125,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.8	988.1	
127,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.6	989.7	
130,0°	2.9	2.5	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.5	991.2	
132,5°	2.7	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.4	992.6	
135,0°	2.7	2.4	2.0	2.0	1.9	1.7	1.7	1.7	1.5	1.7	1.4	1.2	993.8	
137,5°	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.1	994.9	
140,0°	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.0	995.9	
142,5°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.5	1.4	1.4	1.4	0.8	996.7	
145,0°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	0.7	997.4	
147,5°	2.2	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	1.4	0.6	998.1	
150,0°	2.0	1.9	1.7	1.7	1.5	1.4	1.5	1.4	1.4	1.4	1.4	0.5	998.6	
152,5°	1.9	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.4	999.0	
155,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.3	
157,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5	
160,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.7	
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.8	
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.0	0.1	999.9	
167,5°	1.4	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	999.9	
170,0°	1.4	1.2	1.2	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	1000.0	
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EU14H000022 + 5XA54000XBXL EAN: 4069025027191 + 4058352415573	LP number 59426_18
---------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1510	10.7	11.1	10.9
95	241	252	1433	10.1	10.4	10.2
90	229	250	1361	9.6	9.9	9.8
85	216	248	1284	9.0	9.3	9.2
80	203	246	1207	8.5	8.8	8.6
75	190	243	1130	7.9	8.2	8.0
70	178	241	1058	7.5	7.7	7.6
65	165	238	981	6.9	7.2	7.0
60	152	235	904	6.6	6.7	6.6
55	140	232	832	6.1	6.3	6.2
50	127	229	755	5.6	5.8	5.7
45	114	225	678	5.2	5.3	5.2
40	102	221	606	4.7	4.8	4.8
35	89	216	529	4.2	4.4	4.3
30	76	210	452	3.8	3.9	3.8
25	63	203	375	3.3	3.4	3.4
20	51	195	303	2.7	2.8	2.8
17	42	188	250	2.2	2.3	2.2