

Photometric test report

Family
Monsun® Ex

Order number: **51FXB17P470A**
EAN: **4058352933299**

LP number
59504_1



Version prismatic diffuser, opal, polycarbonate, elliptical medium distributon
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 7310 lm
Power consumption = 43.8 W
Luminous efficacy = 166.9 lm/W

serial
documentation
06.11.2023


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 717 cd/klm

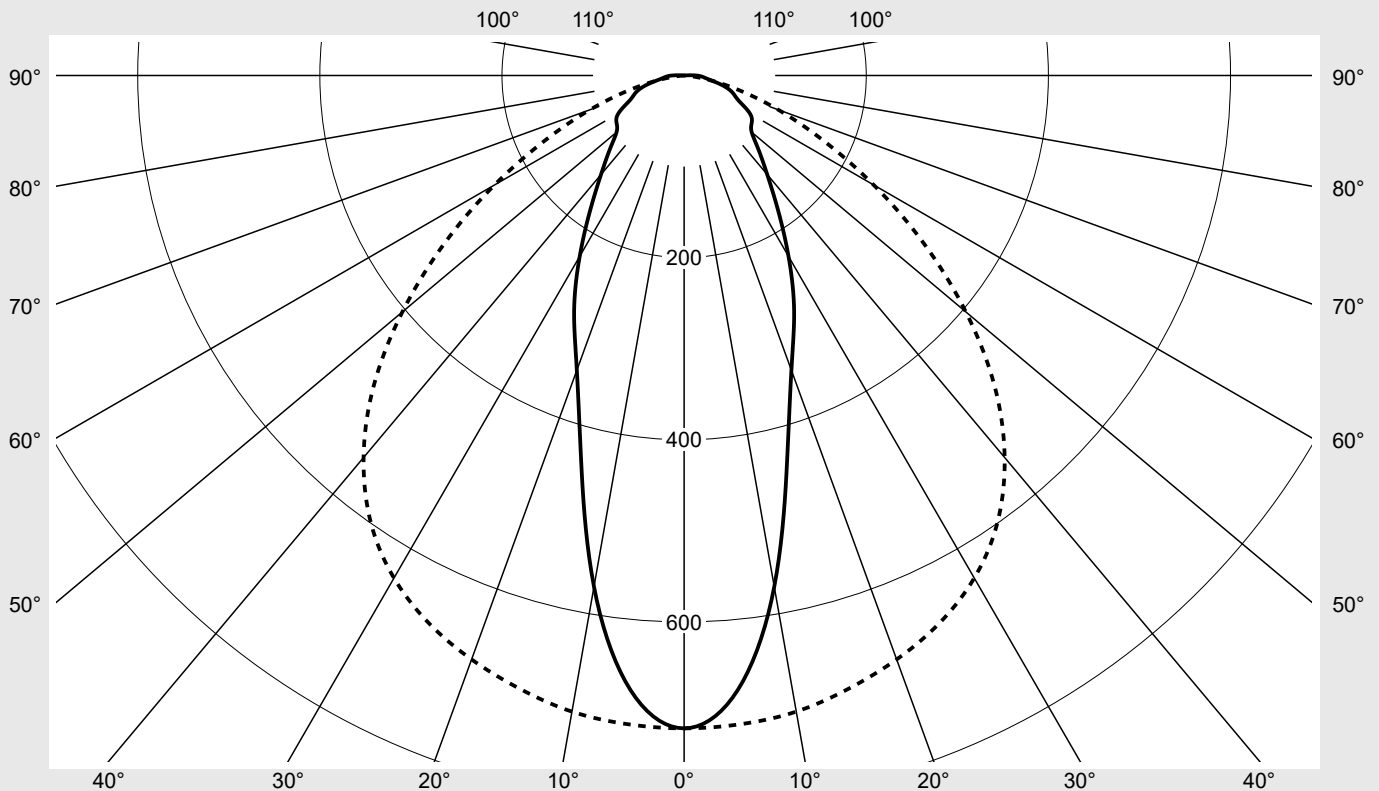

Classifications

DIN 5040 A 5 1
CIE N1=61 N2=86 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 99.7%
 ϕ_o 0.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® Ex	Order number: 51FXB17P470A EAN: 4058352933299	LP number 59504_1
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	4.3	4.3
5°	677.2	678.7	686.5	695.5	704.9	712.3	715.0	33.2	37.5
10°	570.0	577.9	600.9	634.1	668.5	697.1	709.3	60.6	98.1
15°	437.1	447.4	481.0	538.8	609.9	671.8	697.2	78.4	176.5
20°	344.4	351.8	375.2	431.4	529.7	635.0	682.3	88.6	265.1
25°	285.8	291.8	308.5	345.6	439.1	581.6	663.5	94.3	359.4
30°	229.3	235.5	255.1	285.5	352.1	516.0	637.2	94.9	454.3
35°	179.3	185.5	204.4	236.0	285.1	440.2	599.7	91.2	545.5
40°	142.0	146.9	162.0	190.0	233.1	361.6	547.6	84.5	630.0
45°	115.8	119.0	129.0	151.6	189.6	285.9	482.1	75.8	705.8
50°	96.9	97.9	105.1	121.4	151.9	220.0	403.8	66.2	772.0
55°	90.6	88.1	86.8	99.8	118.3	167.4	321.2	57.4	829.4
60°	83.4	80.5	76.4	81.9	95.1	124.0	240.4	49.0	878.4
65°	66.7	67.8	66.1	66.3	76.2	88.1	168.2	39.9	918.3
70°	57.3	58.4	55.3	53.7	53.5	59.5	110.0	31.3	949.6
75°	45.6	46.2	46.2	45.5	34.7	34.0	62.9	23.0	972.6
80°	29.6	30.8	29.4	27.5	20.8	16.7	27.8	13.8	986.4
85°	21.3	21.6	22.1	18.4	12.4	7.2	5.5	8.7	995.1
90°	13.3	13.0	12.5	10.3	6.2	2.6	1.6	4.7	999.8
95°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
100°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
105°	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.0	999.9
110°	0.0	0.0	0.1	0.0	0.1	0.1	0.1	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Monsun® Ex	Order number: 51FXB17P470A EAN: 4058352933299	LP number 59504_1
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.7	16.2	15.1	16.5	16.9	20.6	22.1	20.9	22.4	22.8
	3H	16.2	17.6	16.6	18.0	18.3	21.7	23.0	22.0	23.4	23.7
	4H	16.9	18.2	17.3	18.6	19.0	22.0	23.3	22.4	23.6	24.0
	6H	17.4	18.6	17.8	19.0	19.4	22.3	23.4	22.7	23.7	24.1
	8H	17.6	18.7	18.0	19.1	19.5	22.4	23.4	22.8	23.7	24.1
	12H	17.8	18.8	18.2	19.2	19.7	22.4	23.3	22.8	23.7	24.1
4H	2H	15.6	16.8	16.0	17.2	17.5	20.6	21.9	21.0	22.2	22.6
	3H	17.2	18.3	17.7	18.7	19.1	21.7	22.8	22.1	23.2	23.6
	4H	18.1	19.0	18.5	19.4	19.9	22.1	23.1	22.6	23.5	23.9
	6H	18.6	19.5	19.1	19.9	20.4	22.3	23.2	22.8	23.6	24.1
	8H	18.9	19.7	19.3	20.1	20.6	22.4	23.1	22.9	23.6	24.1
	12H	19.1	19.8	19.6	20.2	20.7	22.4	23.1	22.9	23.5	24.0
8H	4H	18.4	19.2	18.9	19.6	20.1	22.1	22.9	22.6	23.4	23.8
	6H	19.1	19.8	19.6	20.2	20.7	22.4	23.0	22.9	23.5	24.0
	8H	19.4	20.0	19.9	20.5	21.0	22.4	23.0	22.9	23.5	24.0
	12H	19.8	20.2	20.3	20.7	21.3	22.5	22.9	23.0	23.4	24.0
12H	4H	18.5	19.1	19.0	19.6	20.1	22.1	22.8	22.6	23.3	23.8
	6H	19.2	19.7	19.7	20.2	20.7	22.4	23.0	22.9	23.4	24.0
	8H	19.6	20.0	20.1	20.5	21.1	22.5	22.9	23.0	23.4	24.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1580 B = 155	H(C0) = 50 H(C90) = 50	H(C180) = 50 H(C270) = 50
------------------------	---	-------------------------------	---------------------	---------------------------	------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		3695.4	3805.1	4204.5	5118.6	6731.9	10832.2	19726.5	
50°		3249.1	3292.6	3609.3	4342.4	5758.2	8992.3	18071.5	
55°		3228.1	3149.1	3177.9	3825.4	4850.3	7491.2	15991.9	
60°		3192.9	3090.8	3019.3	3408.2	4277.1	6181.1	13604.0	
65°		2782.7	2842.5	2858.4	3046.2	3832.3	4997.8	11127.5	
70°		2650.2	2715.0	2663.8	2777.1	3076.2	3953.9	8831.2	
75°		2386.5	2426.6	2533.1	2714.9	2348.6	2753.7	6488.4	
80°		1798.7	1880.4	1891.1	1955.3	1723.0	1740.3	4044.7	
85°		1554.6	1592.3	1731.1	1630.3	1340.8	1072.0	1382.0	

Photometric test report

Family Monsun® Ex	Order number: 51FXB17P470A EAN: 4058352933299	LP number 59504_1
------------------------------------	--	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

