

Photometric test report

Family
DL® 20 LED

Order number: 5XA512832S008P
EAN: 4058352546413

LP number
59489_17



Version	post-top mounting
Optic	symmetric, wide distribution (PL1.2s)
Cover	toughened safety glass
Lamps	LED 2200 K CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 4250 lm Power consumption = 43.6 W Luminous efficacy = 97.5 lm/W

serial
documentation
07.12.2023

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 324 cd/klm

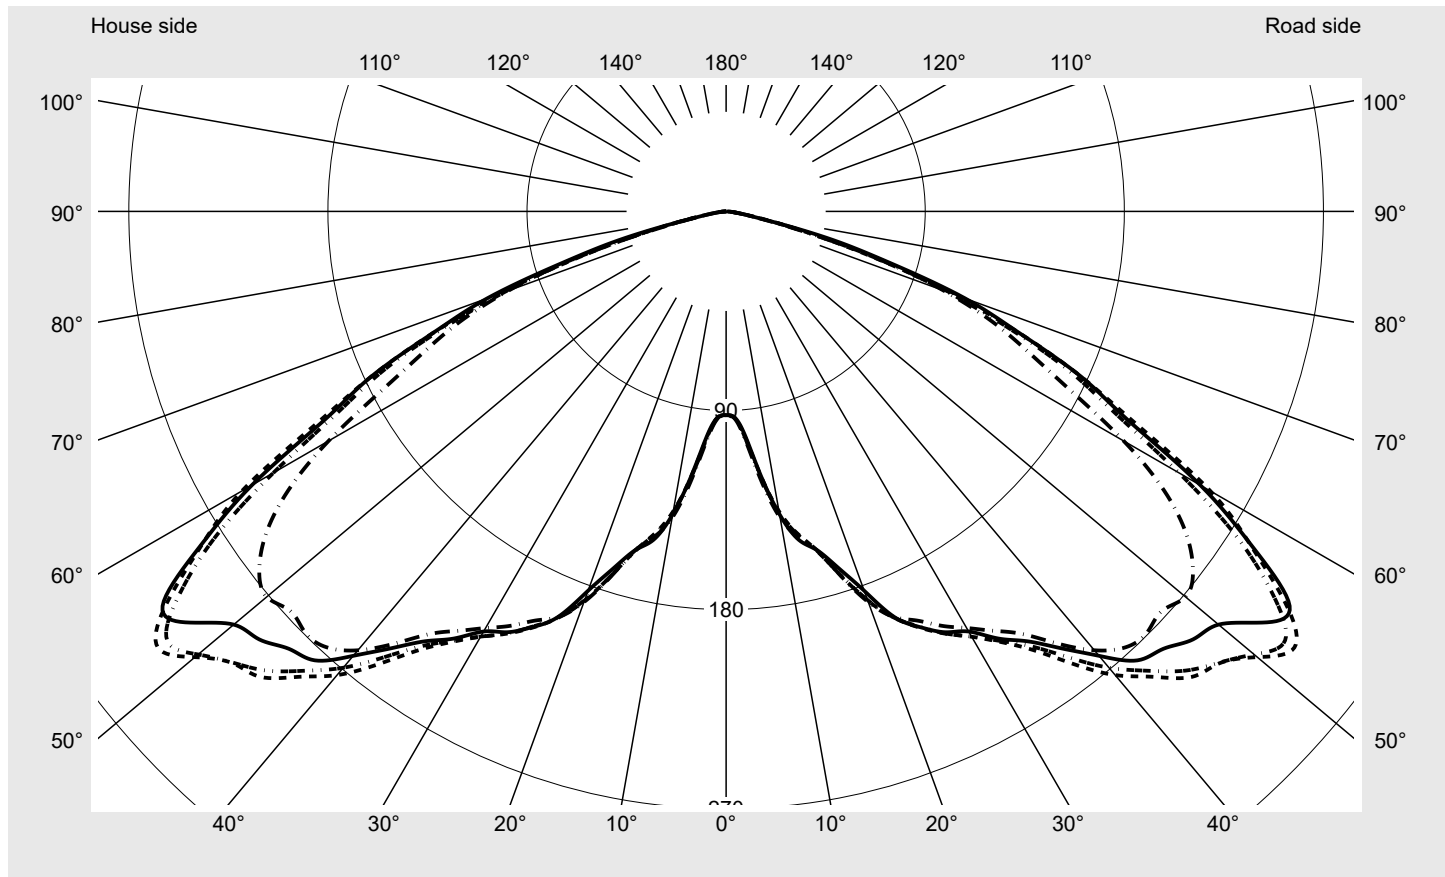

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	119.6
Imax 80°	10.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA512832S008P EAN: 4058352546413	LP number 59489_17
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 52.5°** **KMK 50°** **KMK 47.5°** **KMK 45°** **siteco**

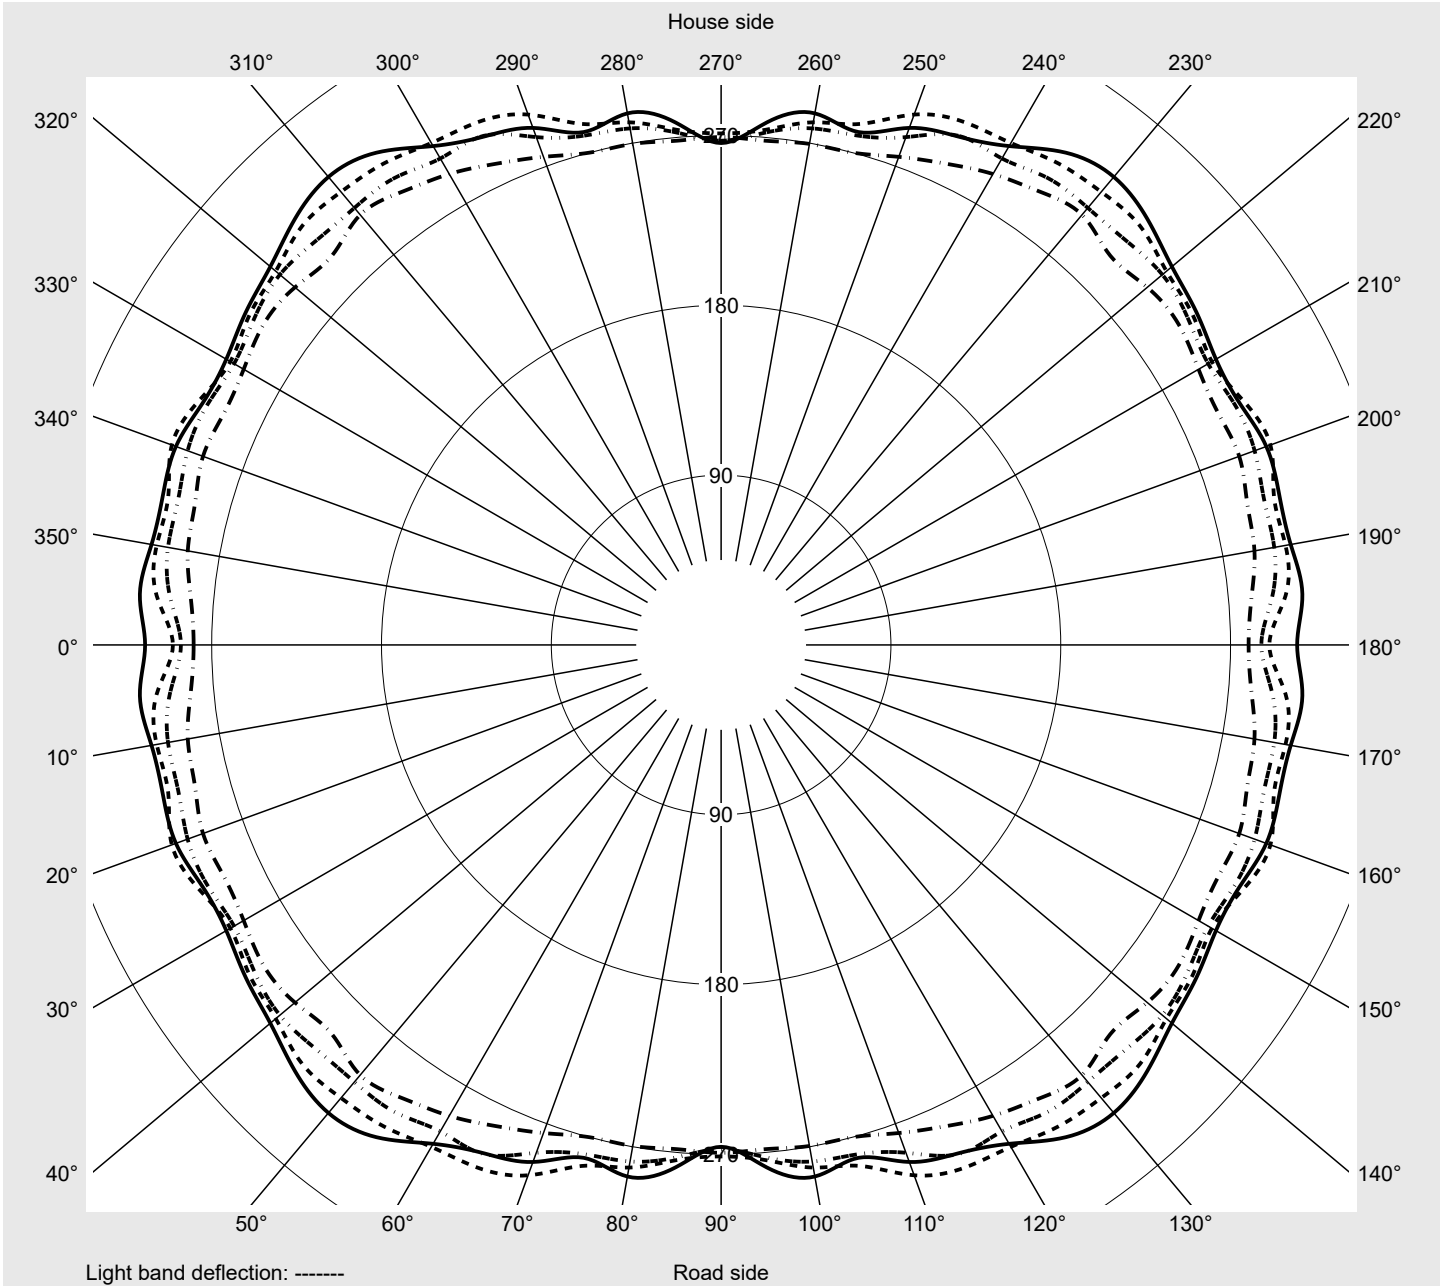

Photometric test report

Family DL® 20 LED	Order number: 5XA512832S008P EAN: 4058352546413	LP number 59489_17
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1
2,5°	93.4	93.2	93.1	93.3	93.3	93.3	93.3	93.3	93.4	93.5
5,0°	102.6	102.9	102.9	103.0	102.9	102.9	103.0	103.0	103.1	103.3
7,5°	120.6	120.2	120.1	120.1	119.8	119.6	119.7	119.6	119.8	120.3
10,0°	139.0	139.1	138.5	138.4	137.3	136.8	136.8	136.3	136.6	137.5
12,5°	152.1	151.2	150.5	150.5	149.0	148.4	148.7	147.7	147.9	149.4
15,0°	158.5	157.9	157.9	158.4	157.4	157.4	158.2	157.5	157.6	159.0
17,5°	169.1	168.6	169.4	170.4	170.6	171.4	172.2	172.4	172.1	172.5
20,0°	182.5	183.9	185.1	185.3	186.6	187.2	186.8	186.8	186.6	186.5
22,5°	198.4	198.7	199.5	198.7	200.2	200.0	198.4	199.1	198.5	197.4
25,0°	207.3	209.4	209.1	207.0	208.7	208.9	206.7	207.5	207.4	205.9
27,5°	214.5	216.3	216.8	214.4	215.4	215.5	214.3	214.7	214.1	213.5
30,0°	219.3	221.6	223.0	220.8	221.0	222.5	222.0	220.9	220.0	219.9
32,5°	228.9	230.3	232.4	230.1	228.5	229.7	230.3	229.4	230.0	229.4
35,0°	237.2	241.2	242.0	238.8	237.4	239.3	241.5	239.9	239.5	240.8
37,5°	248.9	251.0	250.2	248.6	251.3	252.2	253.8	251.9	252.2	254.2
40,0°	262.2	264.6	262.5	260.0	264.5	267.0	266.1	268.6	268.1	269.8
42,5°	275.2	277.3	275.3	277.1	278.3	279.3	279.4	282.4	282.6	279.4
45,0°	279.6	282.1	287.0	288.7	292.2	290.7	292.2	296.1	294.8	291.7
47,5°	286.3	293.2	297.7	297.9	300.9	300.6	298.1	302.0	305.3	303.3
50,0°	290.6	300.3	303.8	303.4	309.8	305.6	300.3	305.1	308.1	314.0
52,5°	305.3	309.2	306.5	306.3	307.5	303.2	302.8	307.5	311.9	319.4
55,0°	311.0	305.4	298.9	300.0	292.0	289.0	292.6	299.2	298.2	304.3
57,5°	282.2	276.7	270.3	271.8	266.1	264.4	268.1	272.4	272.2	276.3
60,0°	247.6	245.5	244.2	239.0	236.3	232.0	232.9	238.4	241.6	244.4
62,5°	205.4	209.1	210.1	207.7	204.4	198.0	200.9	206.1	205.1	205.5
65,0°	177.5	177.6	176.7	178.2	173.4	171.3	172.2	176.4	174.3	174.3
67,5°	143.2	143.6	143.1	145.0	143.3	140.0	143.1	149.0	147.3	144.4
70,0°	114.9	113.5	112.8	112.7	112.4	110.9	112.3	119.6	115.8	111.4
72,5°	78.2	80.5	81.1	78.8	75.5	76.3	77.9	81.3	79.6	74.4
75,0°	50.1	48.6	45.8	43.9	43.4	42.5	42.2	43.8	44.5	42.1
77,5°	21.0	22.0	20.5	20.2	21.3	21.4	20.6	22.0	22.3	21.2
80,0°	9.7	9.8	9.3	9.1	9.7	10.1	9.8	10.2	9.9	9.2
82,5°	4.6	4.9	4.8	4.7	4.8	4.9	4.7	4.9	4.9	4.8
85,0°	2.3	2.4	2.4	2.3	2.3	2.3	2.3	2.4	2.4	2.3
87,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512832S008P EAN: 4058352546413	LP number 59489_17
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	50° 130° 230° 310°	55° 125° 235° 305°	60° 120° 240° 300°	65° 115° 245° 295°	70° 110° 250° 290°	75° 105° 255° 285°	80° 100° 260° 280°	85° 95° 265° 275°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	92.1	0.1	0.1
2,5°	93.6	93.6	93.8	93.7	93.8	93.9	94.0	94.0	94.0	1.1	1.3
5,0°	103.5	103.8	104.1	104.3	104.4	104.7	104.7	104.8	104.8	2.5	3.7
7,5°	120.8	121.4	122.0	122.4	122.6	123.0	123.1	123.2	123.3	4.3	8.1
10,0°	137.7	138.2	139.0	139.1	139.5	140.3	140.0	140.2	140.7	6.6	14.7
12,5°	149.2	149.7	150.7	150.0	150.0	150.8	150.0	149.8	150.7	8.9	23.5
15,0°	158.8	159.0	159.7	158.5	158.3	159.1	158.1	157.8	158.5	11.2	34.8
17,5°	172.6	172.6	172.5	172.3	172.4	172.6	172.5	172.7	172.9	14.2	48.9
20,0°	187.2	186.9	186.0	186.5	187.0	186.8	187.9	188.4	188.0	17.5	66.4
22,5°	198.9	198.8	197.2	198.1	198.3	197.6	199.7	199.8	198.5	20.8	87.3
25,0°	207.7	207.1	204.7	205.8	206.0	204.4	206.4	206.2	204.0	24.0	111.2
27,5°	215.2	215.1	211.4	213.0	213.8	212.2	213.4	213.2	211.2	27.1	138.3
30,0°	222.0	221.9	217.5	218.7	221.0	221.0	221.2	219.6	217.4	30.3	168.6
32,5°	230.7	230.2	225.0	226.1	228.5	226.7	226.4	226.4	224.8	33.7	202.3
35,0°	242.1	239.9	236.9	238.1	238.4	235.2	234.4	234.3	233.1	37.5	239.8
37,5°	257.9	254.0	251.8	253.1	250.1	245.3	243.6	245.6	246.2	41.9	281.6
40,0°	273.6	269.3	265.8	265.6	261.7	256.1	255.0	256.8	259.0	46.6	328.2
42,5°	285.3	281.6	279.0	274.3	269.2	263.3	265.7	264.5	267.2	51.1	379.3
45,0°	297.6	293.5	288.2	281.5	275.3	270.1	269.7	268.3	269.2	55.3	434.6
47,5°	302.4	302.0	297.7	297.7	286.4	279.5	278.0	272.6	267.2	59.4	494.0
50,0°	313.4	311.6	307.2	305.6	299.1	285.9	281.3	274.1	271.1	63.1	557.1
52,5°	323.8	318.5	305.3	297.3	291.6	281.4	286.1	278.0	266.0	65.8	622.9
55,0°	308.6	301.6	284.6	267.9	262.8	266.7	273.7	261.2	253.9	64.7	687.6
57,5°	281.4	273.7	260.4	243.6	239.6	241.8	248.4	242.0	234.7	60.7	748.3
60,0°	252.7	236.3	225.6	218.2	209.4	207.3	215.1	212.9	207.5	54.9	803.2
62,5°	210.3	199.3	188.5	191.6	187.9	180.1	183.3	184.8	175.8	48.1	851.3
65,0°	177.5	172.0	164.5	167.2	167.2	158.3	157.6	157.0	151.2	42.2	893.6
67,5°	143.0	139.2	137.6	142.5	139.9	135.1	129.6	129.7	130.3	35.6	929.2
70,0°	108.8	106.6	108.9	113.6	113.6	108.1	104.3	105.9	104.6	28.6	957.8
72,5°	72.6	73.7	76.1	79.3	78.8	76.0	73.7	73.5	74.9	20.1	977.9
75,0°	42.7	43.0	42.7	43.6	43.1	44.3	40.7	40.8	41.6	11.5	989.5
77,5°	21.9	21.5	21.5	22.1	20.4	19.9	19.5	19.9	19.4	5.6	995.1
80,0°	9.5	9.8	9.7	10.1	9.8	9.4	9.7	9.9	9.3	2.6	997.7
82,5°	4.9	5.0	4.9	5.3	5.0	4.8	5.1	5.2	4.9	1.3	999.0
85,0°	2.4	2.4	2.4	2.4	2.4	2.3	2.5	2.4	2.3	0.6	999.7
87,5°	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.2	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512832S008P EAN: 4058352546413	LP number 59489_17
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4250	43.6	44.8	44.2
95	240	4033	41.1	42.2	41.7
90	227	3830	38.8	39.8	39.3
85	213	3609	36.3	37.3	36.8
80	200	3402	34.2	35.0	34.6
75	187	3193	32.0	32.8	32.4
70	173	2967	29.6	30.3	30.0
65	160	2755	27.4	28.1	27.8
60	148	2558	25.4	26.1	25.8
55	135	2342	23.3	23.9	23.6
50	122	2124	21.2	21.7	21.4
45	109	1905	19.1	19.5	19.3
40	97	1701	17.2	17.6	17.4
35	85	1494	15.3	15.6	15.4
30	72	1270	13.2	13.6	13.4
25	60	1060	11.5	11.7	11.6
20	48	849	9.7	9.8	9.8
15	36	637	7.8	7.9	7.8
11	27	476	6.5	6.6	6.6