




Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
	Version cover, opal, direct-/ indirect distribution, diffuse Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 6320 lm Power consumption = 33.5 W Luminous efficacy = 188.7 lm/W	serial documentation 18.01.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 294 cd/klm**

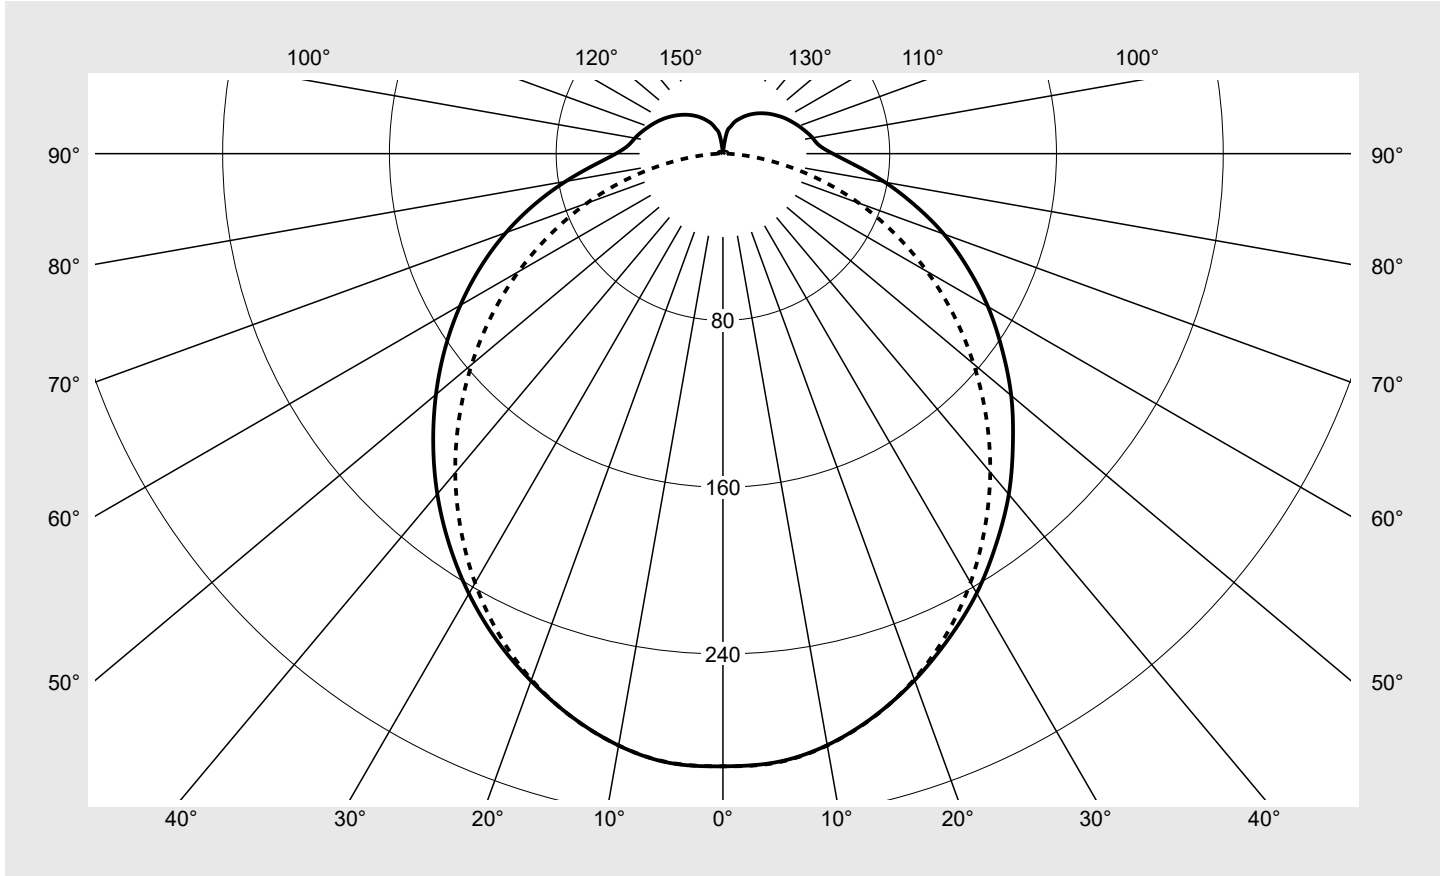

Classifications	
DIN 5040	B 3 1
CIE	N1=44 N2=73 N3=91 N4=87 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	87.4%
ϕ_o	12.6%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	23.0	24.1	24.7
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7
4H	2H	20.8	22.2	21.4	22.7	23.2	20.5	21.8	21.1	22.3	22.9
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.6
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7
8H	4H	24.2	25.0	24.8	25.7	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.4	26.1	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0
	8H	25.9	26.6	26.6	27.2	27.9	24.3	24.9	24.9	25.5	26.3
	12H	26.5	27.0	27.2	27.7	28.5	24.4	24.9	25.1	25.6	26.4
12H	4H	24.2	24.9	24.8	25.6	26.3	23.4	24.1	24.0	24.7	25.4
	6H	25.4	26.0	26.1	26.7	27.4	24.1	24.7	24.8	25.4	26.1
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500	H(C0) = 25	H(C180) = 25
			B = 76	H(C90) = 25	H(C270) = 25

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m ²											
45°	11605.7	11592.5	12026.7	13771.0	12075.2	11602.3	11596.2	11587.5	12037.5	13796.0	12080.6	11617.0
50°	11184.5	11144.0	11479.4	13278.9	11496.7	11112.9	11134.4	11118.1	11473.6	13306.3	11514.0	11138.8
55°	10746.8	10708.3	10909.3	12766.3	10915.5	10636.6	10698.8	10658.7	10896.8	12789.2	10946.7	10691.8
60°	10369.8	10277.3	10335.5	12189.1	10321.8	10170.0	10272.6	10199.8	10294.3	12206.6	10369.8	10241.5
65°	9965.2	9846.8	9762.9	11523.8	9724.5	9703.2	9852.9	9748.8	9693.8	11534.1	9786.0	9807.6
70°	9602.6	9368.4	9122.0	10762.2	9060.3	9179.2	9430.2	9230.1	9016.3	10762.2	9139.6	9295.6
75°	9154.0	8825.5	8328.3	9677.4	8231.6	8626.5	8974.9	8659.7	8185.7	9662.7	8346.0	8784.0
80°	8792.2	8324.8	7448.2	8155.9	7264.6	8120.9	8530.4	8111.2	7257.0	8125.0	7389.1	8286.0
85°	8507.1	7989.9	6555.3	6021.6	6392.8	7687.9	8267.9	7756.6	6340.3	5952.7	6538.4	7870.2

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

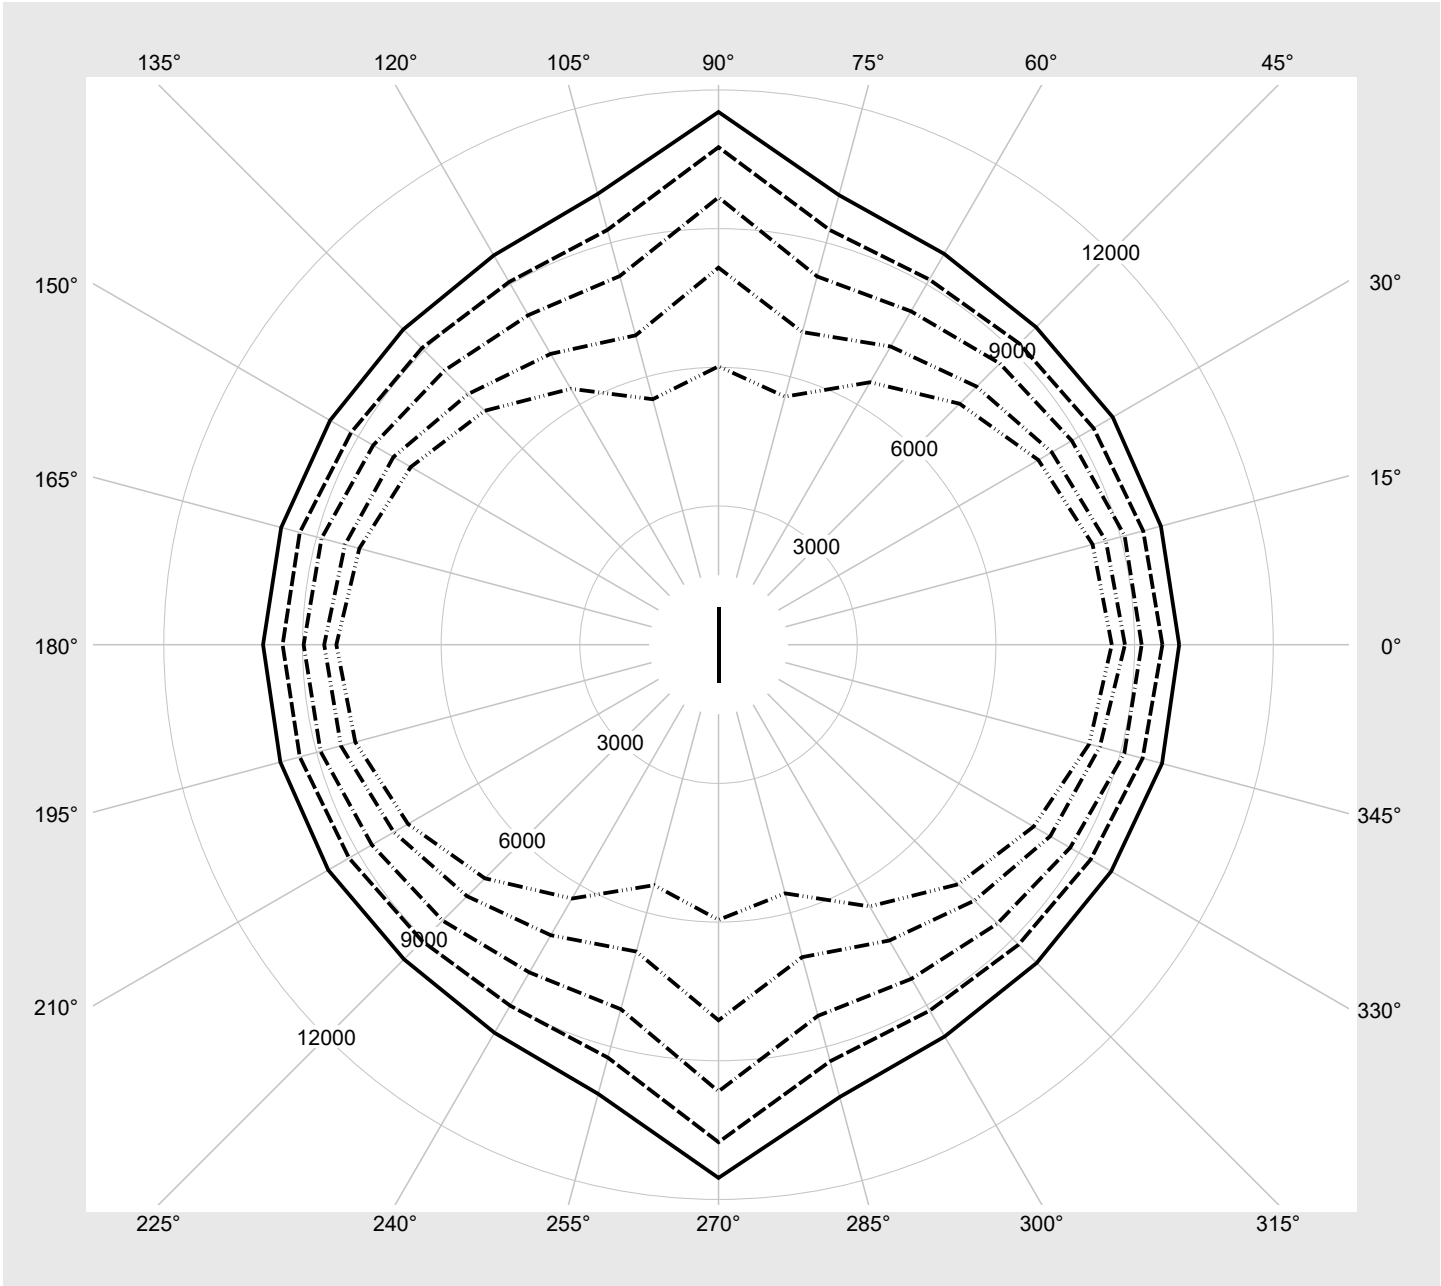

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1DDN46XM EAN: 4069025021618	LP number 59520_139
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6320	33.5
95	241	252	6008	31.8
90	228	250	5692	30.1
85	215	248	5376	28.5
80	202	246	5060	27.0
75	189	243	4740	25.4
70	176	241	4420	23.8
65	163	238	4100	22.2
60	151	235	3802	20.7
55	138	232	3481	19.1
50	125	228	3156	17.4
45	113	224	2855	15.8
40	100	220	2530	14.1
35	87	215	2202	12.3
30	75	209	1900	10.7
25	62	202	1570	9.1
20	50	194	1264	7.6
15	38	184	959	6.0
10	25	169	625	4.1
6	15	150	369	2.7