
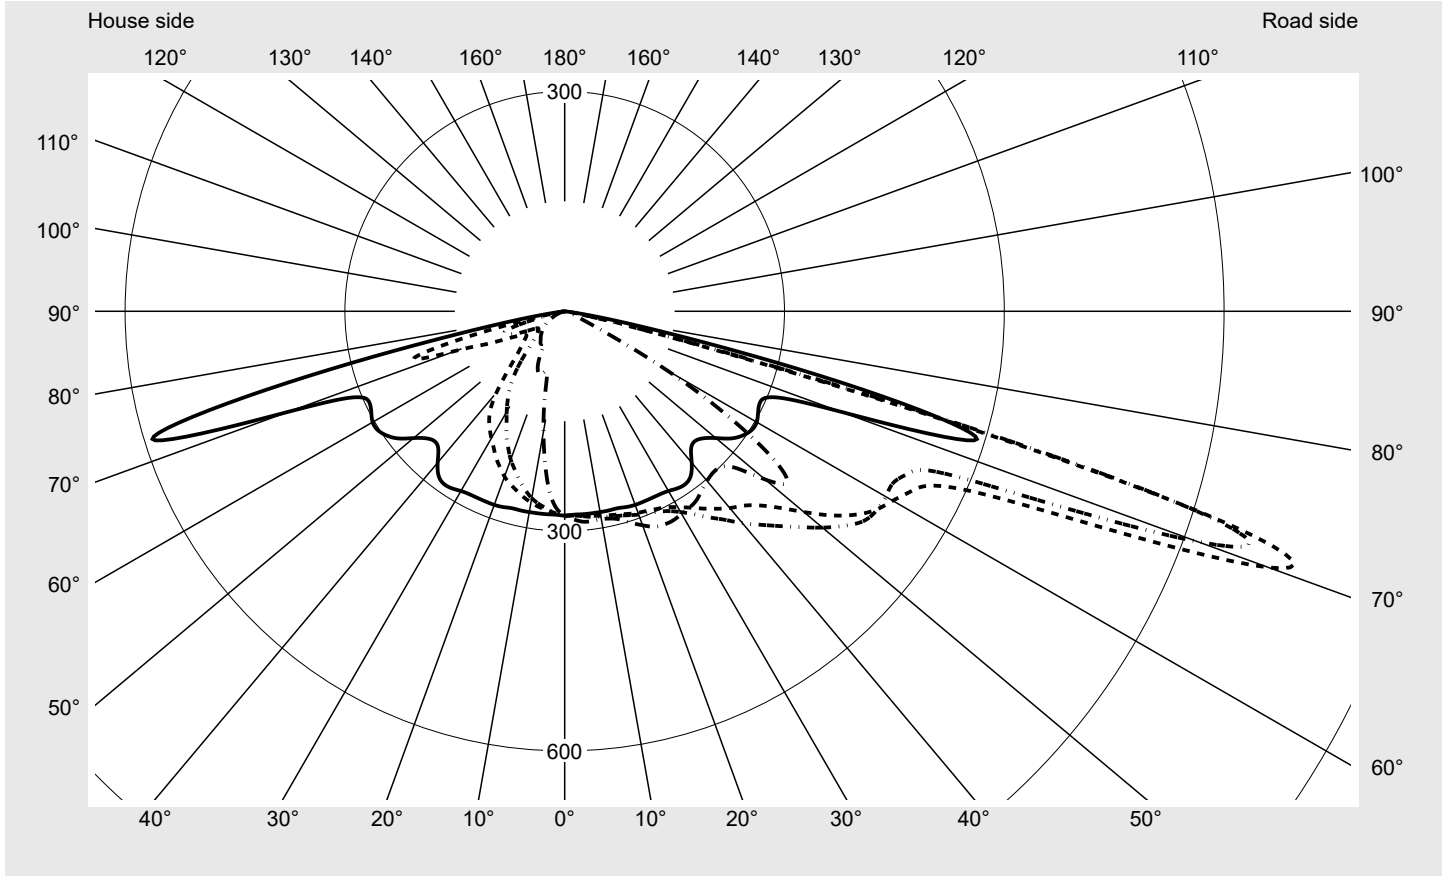


# Photometric test report

<b>Family</b> <b>Streetlight 21 micro LED</b>	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> <b>59535_96</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up <b>Optic</b> asymmetric, extremely wide distribution (P0.8a), Back Light Control (BLC) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG-Smart Interface <b>Rated values</b> Net luminous flux = 4470 lm Power consumption = 39.1 W Luminous efficacy = 114.3 lm/W	<b>serial documentation</b> <b>18.01.2024</b>



**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 1022 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	1022.3
Imax 80°	56.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 micro LED	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> 59535_96
---	--	------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

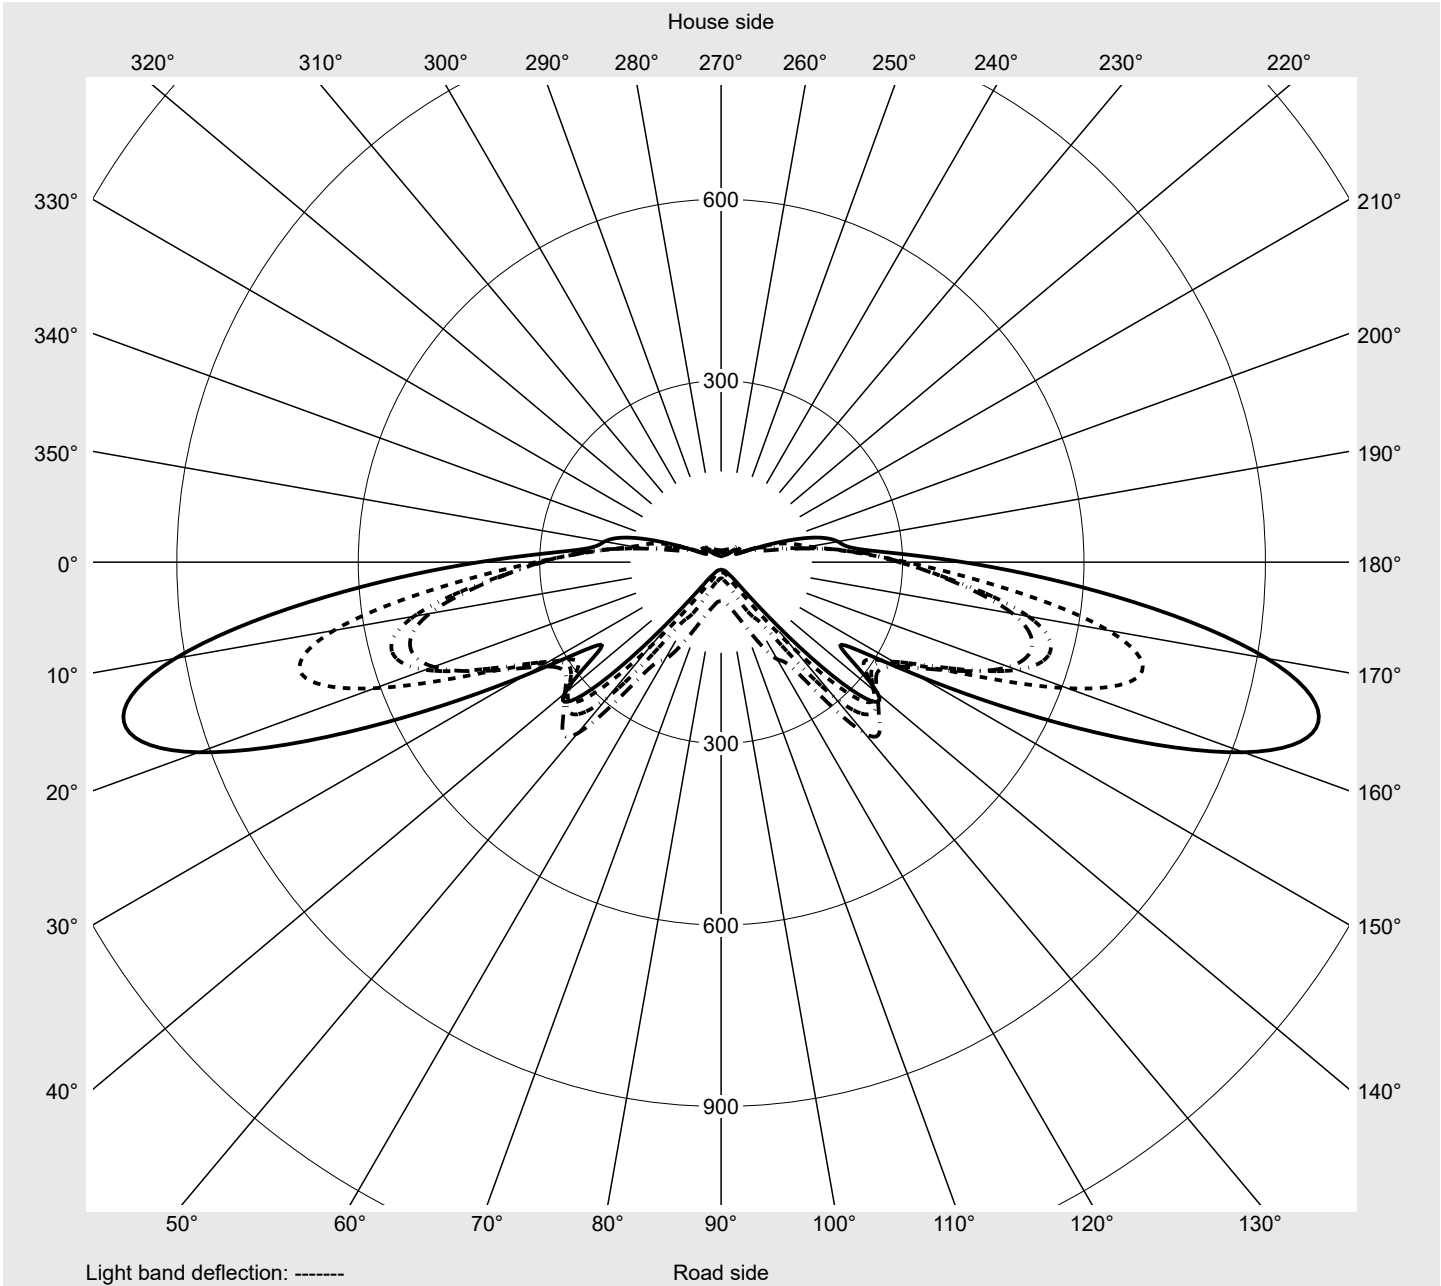

## Photometric test report

<b>Family</b> <b>Streetlight 21 micro LED</b>	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> <b>59535_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	277.9	277.8	278.3	278.5	279.1	279.5	279.7	280.3	281.1	281.1	281.8	282.0	282.5
5,0°	278.0	278.0	278.8	279.6	280.7	281.8	282.5	283.4	284.3	284.7	285.3	285.7	286.3
7,5°	278.2	278.8	279.7	281.6	283.0	284.3	285.2	285.8	286.5	286.6	286.8	287.0	287.2
10,0°	278.3	279.3	281.1	283.2	284.8	286.1	286.8	287.1	287.4	287.5	287.6	287.5	287.6
12,5°	278.4	280.6	282.9	285.1	287.1	288.1	288.1	288.3	288.6	288.3	288.2	288.3	288.1
15,0°	278.3	281.8	284.2	287.0	288.9	289.7	290.4	290.4	290.4	290.5	290.7	291.2	291.5
17,5°	280.1	284.2	287.0	289.9	291.8	292.6	293.2	293.3	294.2	295.6	296.5	297.9	299.1
20,0°	281.2	286.5	289.9	292.7	295.2	296.4	297.4	298.7	300.7	302.2	304.8	306.3	307.6
22,5°	281.2	288.0	291.8	294.7	298.0	300.7	303.7	306.7	309.6	312.0	314.3	316.4	318.0
25,0°	281.2	289.0	293.5	297.6	302.0	305.6	310.8	316.1	320.1	323.0	325.6	327.5	328.0
27,5°	281.6	290.6	296.3	301.5	307.4	313.2	319.9	326.8	332.3	336.2	338.0	338.5	336.9
30,0°	283.2	294.4	301.5	308.8	316.5	324.6	332.6	340.2	345.8	350.2	351.0	348.3	344.3
32,5°	286.5	299.7	308.4	317.7	328.5	340.0	349.8	357.0	362.1	365.5	364.2	358.0	349.5
35,0°	287.6	303.8	315.5	328.7	343.4	357.5	368.6	376.7	381.4	382.7	377.3	366.1	353.1
37,5°	282.8	302.1	319.8	339.7	358.7	375.8	388.1	395.7	398.9	396.8	386.6	370.4	354.4
40,0°	269.7	294.5	321.2	350.6	377.6	398.0	410.2	417.0	415.9	407.6	392.5	373.6	355.1
42,5°	255.3	287.6	322.7	360.0	395.2	420.8	432.6	434.9	428.7	414.1	394.4	373.9	354.4
45,0°	251.0	289.5	331.0	374.7	414.6	444.9	453.6	450.5	436.8	415.6	393.7	371.5	352.8
47,5°	256.6	303.0	350.2	396.9	436.1	462.6	468.6	458.1	439.5	412.5	387.5	369.7	355.1
50,0°	269.2	324.0	378.1	426.2	459.3	475.7	475.8	456.8	430.3	401.5	381.2	373.1	369.5
52,5°	285.2	346.9	408.8	457.5	481.0	483.4	467.9	440.5	409.6	388.7	382.1	388.8	404.4
55,0°	295.9	364.8	434.7	484.0	498.6	480.9	443.0	412.5	385.1	377.3	391.6	422.7	440.8
57,5°	302.2	378.2	457.4	504.1	505.0	463.7	409.7	376.6	362.7	372.1	410.7	405.5	386.0
60,0°	302.7	385.2	474.2	517.0	506.3	445.5	376.2	342.3	346.6	374.1	408.1	323.4	289.9
62,5°	297.6	389.4	489.3	532.5	506.1	424.7	345.6	316.1	337.3	370.1	369.8	228.7	185.2
65,0°	294.2	397.3	515.7	563.9	520.7	414.1	329.1	304.9	329.7	352.9	292.0	146.3	103.0
67,5°	306.5	462.0	650.1	717.4	609.4	431.9	331.0	288.1	329.0	319.8	183.6	76.0	42.3
70,0°	400.3	655.6	916.4	1022.3	919.1	647.3	374.3	240.7	338.2	282.9	84.5	28.5	20.0
72,5°	586.0	762.4	853.4	904.4	899.0	672.4	361.6	293.9	353.5	133.4	22.0	16.9	14.5
75,0°	449.7	381.0	325.6	308.5	339.8	261.0	278.4	408.8	241.2	30.0	14.0	12.7	10.9
77,5°	187.6	136.4	104.4	83.4	66.4	31.3	81.0	143.9	55.8	10.9	9.4	9.1	7.9
80,0°	56.2	38.7	28.1	20.2	12.5	7.1	6.9	10.5	5.9	5.4	6.4	5.7	5.0
82,5°	9.6	8.1	6.9	5.8	4.4	3.9	3.4	3.0	2.7	2.5	2.7	2.4	2.4
85,0°	2.7	2.5	2.3	2.2	1.9	1.7	1.6	1.6	1.3	1.3	1.2	1.1	1.0
87,5°	1.5	1.3	1.2	1.2	1.1	1.0	1.0	0.8	0.8	0.8	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 micro LED</b>	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> <b>59535_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8
2,5°	282.9	283.2	283.5	283.8	284.1	284.2	277.4	276.4	276.1	275.6	274.5	273.9	273.1
5,0°	286.6	287.0	287.2	287.6	288.0	288.3	277.0	274.5	272.6	270.8	268.5	266.3	264.1
7,5°	287.4	287.5	287.8	288.2	288.3	288.6	276.2	272.6	269.3	265.7	261.4	256.5	251.1
10,0°	287.2	287.1	287.2	287.7	288.3	288.1	275.3	270.3	265.0	258.9	250.7	242.0	231.8
12,5°	288.1	288.2	288.7	289.2	289.4	289.8	274.1	267.4	259.7	249.5	236.8	222.9	208.7
15,0°	292.0	292.1	292.7	293.8	294.2	294.4	273.1	264.3	253.4	238.6	221.3	203.4	184.9
17,5°	299.9	300.3	300.8	301.6	302.6	302.8	273.2	261.7	247.2	226.6	204.9	181.7	160.7
20,0°	308.0	308.8	309.2	309.9	310.3	310.8	273.2	259.9	240.1	215.4	188.9	162.4	139.4
22,5°	318.6	318.4	318.1	317.7	317.8	318.3	271.5	255.2	230.6	201.6	170.3	143.2	114.9
25,0°	327.4	325.7	323.3	321.8	320.7	321.2	269.5	249.4	221.2	187.9	153.1	121.8	90.5
27,5°	334.3	330.2	326.2	323.3	321.5	321.5	266.7	243.2	210.0	171.9	135.7	99.1	71.1
30,0°	339.2	333.1	326.9	322.2	319.5	319.3	265.3	237.9	200.2	158.3	118.4	79.9	62.3
32,5°	341.5	333.3	325.9	320.7	318.1	317.3	264.9	232.9	190.4	145.0	101.3	66.5	60.1
35,0°	342.5	333.9	325.9	318.9	315.1	314.2	263.0	225.7	179.7	131.6	85.9	59.6	60.6
37,5°	342.0	331.6	322.7	314.3	309.4	307.4	254.3	213.3	165.2	116.7	73.0	56.4	60.0
40,0°	340.1	328.2	319.5	310.6	304.4	302.4	235.8	192.1	144.6	99.3	62.9	54.2	57.1
42,5°	337.2	325.3	318.1	307.7	301.1	299.2	216.4	169.2	122.0	81.3	56.4	52.1	54.2
45,0°	337.1	325.6	317.5	309.4	303.1	301.1	203.9	150.0	103.2	66.2	51.0	50.1	52.0
47,5°	343.8	336.0	329.8	323.8	318.2	316.4	200.2	139.3	88.8	56.2	48.4	48.6	50.7
50,0°	367.8	368.7	368.6	364.8	359.1	357.0	204.6	135.1	79.1	49.7	47.4	49.0	50.6
52,5°	419.9	422.4	412.8	399.2	386.2	382.4	211.0	133.0	72.3	46.2	47.5	49.5	49.6
55,0°	424.6	395.0	374.2	359.3	344.6	341.1	216.4	132.7	66.2	43.9	45.5	46.9	45.5
57,5°	353.8	310.6	285.4	270.3	259.7	257.6	218.5	130.4	61.9	43.1	41.0	41.0	39.3
60,0°	250.3	204.6	182.6	173.4	165.1	161.8	217.0	129.2	64.3	47.9	38.9	36.0	36.2
62,5°	145.5	108.8	86.7	74.0	66.0	64.6	214.2	129.0	73.8	58.1	41.2	33.5	34.8
65,0°	67.5	45.0	35.7	31.3	27.6	26.8	210.1	133.0	90.9	71.2	45.1	31.9	34.7
67,5°	26.8	20.8	18.5	17.5	16.8	16.4	208.5	148.3	118.6	81.6	45.1	29.9	33.7
70,0°	16.2	14.4	13.8	13.2	12.7	12.3	236.4	195.9	156.6	87.0	37.9	28.1	32.3
72,5°	12.8	11.4	10.8	10.2	9.6	9.4	409.6	322.7	215.6	78.7	30.0	27.9	29.6
75,0°	9.7	8.6	7.9	7.5	7.1	7.0	414.6	266.9	148.4	43.3	26.7	27.7	25.5
77,5°	6.7	5.8	5.3	5.0	4.7	4.6	158.3	92.5	50.4	16.7	18.7	22.5	20.1
80,0°	4.0	3.5	3.0	2.9	2.7	2.7	44.1	27.3	12.5	8.6	10.0	12.3	11.7
82,5°	2.2	2.1	1.8	1.8	1.7	1.7	10.0	6.4	4.8	4.8	5.1	5.3	5.2
85,0°	1.0	1.0	1.0	0.8	0.8	1.0	2.8	2.8	2.8	2.7	2.5	2.4	2.2
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 micro LED</b>	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> <b>59535_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	278.8	0.4	0.4
2,5°	272.2	271.8	271.0	270.4	269.8	269.5	269.2	268.7	268.6	268.6	268.5	3.3	3.7
5,0°	261.5	258.9	256.5	253.9	251.4	249.4	247.6	246.1	245.0	244.4	244.3	6.5	10.2
7,5°	244.8	238.5	232.3	226.9	221.6	217.2	213.5	210.6	208.6	207.3	206.8	9.4	19.6
10,0°	221.4	211.9	203.1	194.5	186.1	179.5	174.5	171.0	168.5	167.1	166.7	12.0	31.6
12,5°	195.0	181.2	169.8	160.0	151.3	144.4	138.5	134.0	131.0	128.9	128.4	14.2	45.8
15,0°	167.9	153.5	140.2	128.2	117.7	109.1	102.7	98.6	95.9	94.7	94.3	16.3	62.0
17,5°	142.2	124.6	108.6	95.7	87.6	83.9	83.1	83.8	84.7	85.5	85.9	18.4	80.4
20,0°	116.6	96.4	83.1	78.2	78.6	81.3	84.5	87.3	89.3	90.3	90.9	20.8	101.2
22,5°	89.5	75.2	72.6	76.0	80.9	85.1	88.4	90.5	91.6	91.8	92.2	23.2	124.4
25,0°	71.4	68.6	73.3	79.7	85.5	88.8	90.0	89.7	88.7	87.4	87.1	25.6	150.0
27,5°	64.7	70.1	78.6	86.0	89.6	90.0	87.9	84.8	81.5	78.7	77.4	28.0	178.0
30,0°	64.8	74.0	83.0	87.6	87.7	84.1	78.9	73.3	68.2	64.5	62.9	30.3	208.3
32,5°	67.5	77.3	83.7	84.9	81.4	75.6	69.2	63.0	57.6	53.9	52.5	32.7	241.0
35,0°	69.5	77.5	81.3	79.5	74.6	69.1	63.6	59.6	56.8	55.4	54.7	35.2	276.2
37,5°	66.9	72.0	72.9	70.1	66.3	64.1	63.0	61.0	57.8	55.1	54.2	37.4	313.5
40,0°	61.1	63.3	62.3	60.6	62.2	62.0	58.2	55.0	53.0	51.5	51.0	39.1	352.7
42,5°	56.2	56.2	55.5	58.5	59.0	54.9	52.9	51.4	50.1	49.0	48.4	40.8	393.5
45,0°	53.0	52.6	55.5	57.6	52.9	50.7	49.0	47.7	46.7	46.0	45.7	42.7	436.2
47,5°	51.0	53.0	57.0	52.2	48.3	46.4	45.0	44.0	43.2	42.7	42.6	45.2	481.4
50,0°	50.3	54.8	53.7	46.7	43.9	42.3	41.2	40.5	39.8	39.4	39.2	48.5	529.9
52,5°	49.2	54.1	48.4	42.2	39.7	38.5	37.5	36.4	35.8	35.3	35.3	52.1	582.0
55,0°	47.2	51.3	42.8	37.7	35.7	34.3	33.3	32.8	32.2	31.9	31.9	53.0	634.9
57,5°	46.8	46.6	37.7	33.1	31.7	30.7	29.9	29.5	29.0	28.8	28.8	50.6	685.5
60,0°	45.6	41.7	32.2	29.5	28.5	27.6	26.4	25.5	24.7	24.2	24.2	46.4	731.9
62,5°	43.5	35.8	28.2	26.2	24.8	23.3	21.9	20.9	20.2	19.7	19.8	41.6	773.6
65,0°	39.3	31.9	24.7	22.4	20.8	19.0	17.8	17.1	16.4	16.2	16.2	38.9	812.4
67,5°	35.7	27.6	20.9	18.1	16.8	15.5	14.4	13.8	13.5	13.3	13.3	40.2	852.7
70,0°	31.4	23.6	17.7	15.1	13.8	12.3	11.5	10.8	10.3	9.9	9.7	49.7	902.3
72,5°	26.8	19.7	14.6	12.0	10.5	9.1	8.2	7.7	7.3	6.8	6.8	52.1	954.4
75,0°	22.1	15.8	11.6	9.2	7.7	6.8	5.8	5.3	4.8	4.6	4.6	30.6	985.0
77,5°	16.3	11.4	8.2	6.4	5.3	4.4	3.7	3.1	2.9	2.7	2.7	10.4	995.4
80,0°	9.8	6.7	5.0	4.0	3.1	2.5	2.1	1.7	1.3	1.0	1.0	2.9	998.4
82,5°	4.5	3.5	2.8	2.1	1.6	1.3	1.1	1.0	0.7	0.6	0.5	1.0	999.3
85,0°	1.9	1.7	1.5	1.1	0.8	0.8	0.7	0.6	0.5	0.5	0.5	0.4	999.8
87,5°	1.2	1.1	0.8	0.8	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 micro LED	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> 59535_96
---	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4470	39.1	40.8	40.0
95	238	252	4244	36.6	38.1	37.4
90	223	249	4025	34.2	35.7	35.0
85	208	247	3801	31.9	33.3	32.6
80	193	244	3571	29.7	30.9	30.3
75	179	241	3351	27.5	28.6	28.0
70	165	238	3127	25.4	26.5	26.0
65	152	235	2912	23.4	24.4	23.9
60	138	232	2676	21.3	22.2	21.8
55	125	228	2452	19.4	20.2	19.8
50	113	224	2241	17.7	18.4	18.0
45	100	220	2007	15.8	16.5	16.2
40	88	215	1785	14.1	14.6	14.4
35	76	210	1559	12.4	12.9	12.6
30	65	204	1348	10.8	11.2	11.0
25	53	197	1113	9.2	9.5	9.4
20	42	188	893	7.7	7.8	7.8
15	31	177	669	6.1	6.3	6.2
12	24	168	525	5.1	5.3	5.2

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4580	39.6	41.3	40.4
95	239	252	4358	37.2	38.8	38.0
90	223	249	4115	34.7	36.1	35.4
85	209	247	3898	32.5	33.9	33.2
80	194	244	3660	30.1	31.5	30.8
75	180	241	3433	28.0	29.1	28.6
70	166	238	3202	25.9	27.0	26.4
65	153	235	2981	24.0	24.9	24.4
60	139	232	2739	21.8	22.7	22.2
55	126	228	2510	19.9	20.7	20.3
50	114	225	2295	18.1	18.9	18.5
45	101	220	2055	16.2	16.8	16.5
40	89	216	1830	14.5	15.0	14.8
35	77	210	1600	12.8	13.2	13.0
30	65	204	1366	11.0	11.4	11.2
25	54	197	1147	9.4	9.8	9.6
20	43	189	924	7.9	8.2	8.0
15	31	177	677	6.2	6.4	6.3
12	24	168	530	5.2	5.4	5.3

## Photometric test report

<b>Family</b> Streetlight 21 micro LED	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> 59535_96
---	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4530	39.3	41.0	40.2
95	238	252	4298	36.8	38.3	37.6
90	223	249	4075	34.4	35.9	35.2
85	208	247	3846	32.1	33.5	32.8
80	194	244	3627	29.9	31.3	30.6
75	180	241	3404	27.8	28.9	28.4
70	166	238	3176	25.7	26.8	26.2
65	152	235	2941	23.6	24.6	24.1
60	139	232	2719	21.7	22.5	22.1
55	126	228	2493	19.8	20.5	20.2
50	113	224	2261	17.8	18.5	18.2
45	101	220	2043	16.0	16.7	16.4
40	89	216	1819	14.3	14.9	14.6
35	77	210	1591	12.7	13.1	12.9
30	65	204	1358	10.9	11.3	11.1
25	54	197	1141	9.4	9.7	9.6
20	42	188	899	7.7	7.9	7.8
15	31	177	674	6.2	6.4	6.3
12	24	168	528	5.2	5.3	5.2

**Photometric test report**

<b>Family</b> Streetlight 21 micro LED	<b>Order number: 5XE1R33S08DB</b> <b>EAN: 4069025148629</b>	<b>LP number</b> <b>59535_96</b>
---	--	-------------------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	4470.0	39.1
5.0	4580.0	39.6
15.0	4530.0	39.3