




Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
	Version post-top or side-entry mounting, NEMA 7 pin (DALI) Optic asymmetric, extremely wide distribution (P0.8a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 80 Controlgear ECG-DALI Plus Rated values Net luminous flux = 4340 lm Power consumption = 39.1 W Luminous efficacy = 111 lm/W	serial documentation 18.01.2024





Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 879 cd/klm**

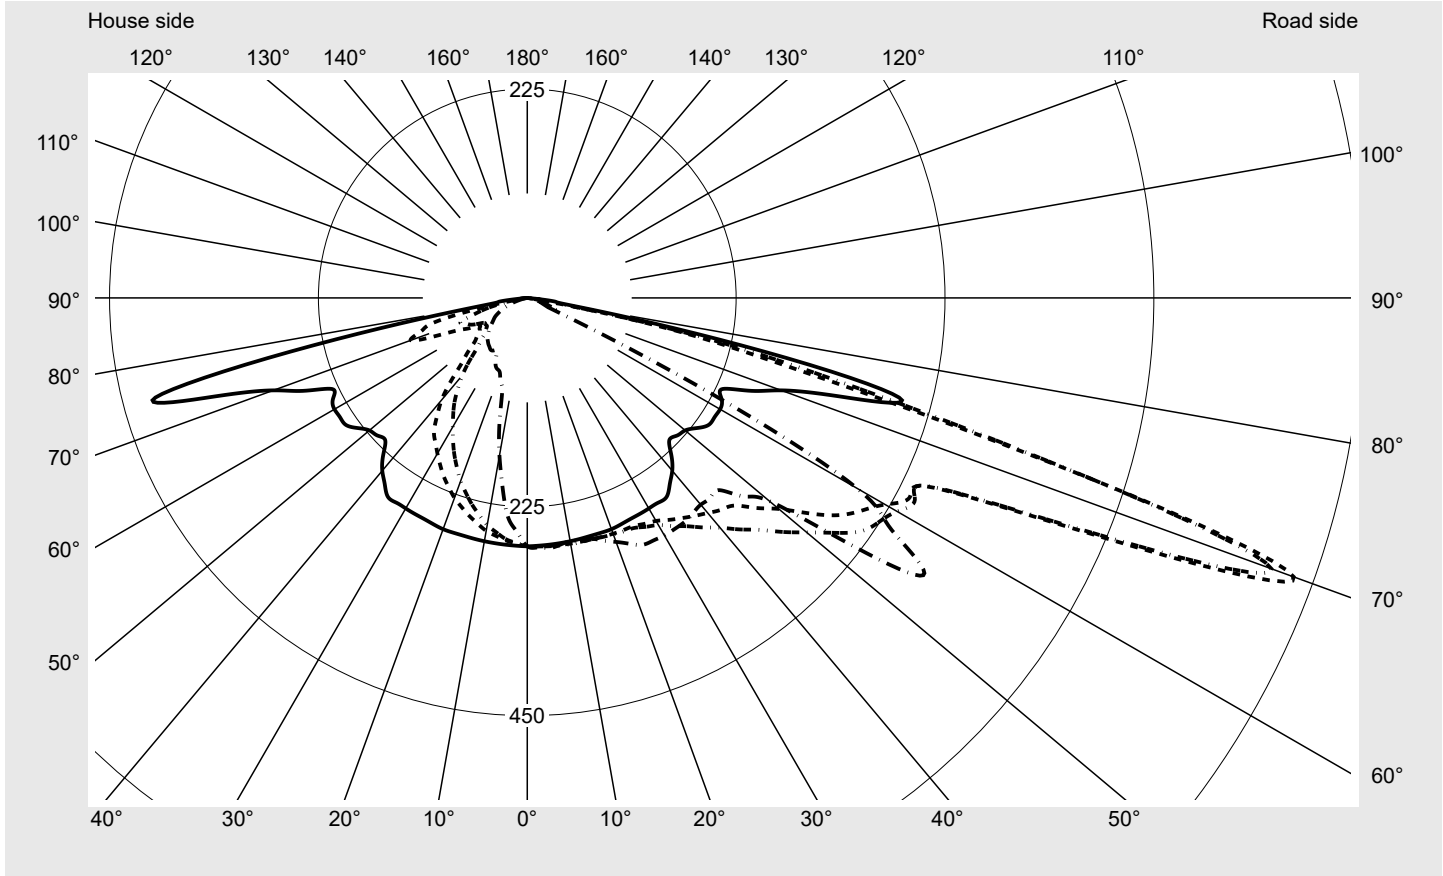


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	878.7
Imax 80°	57.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

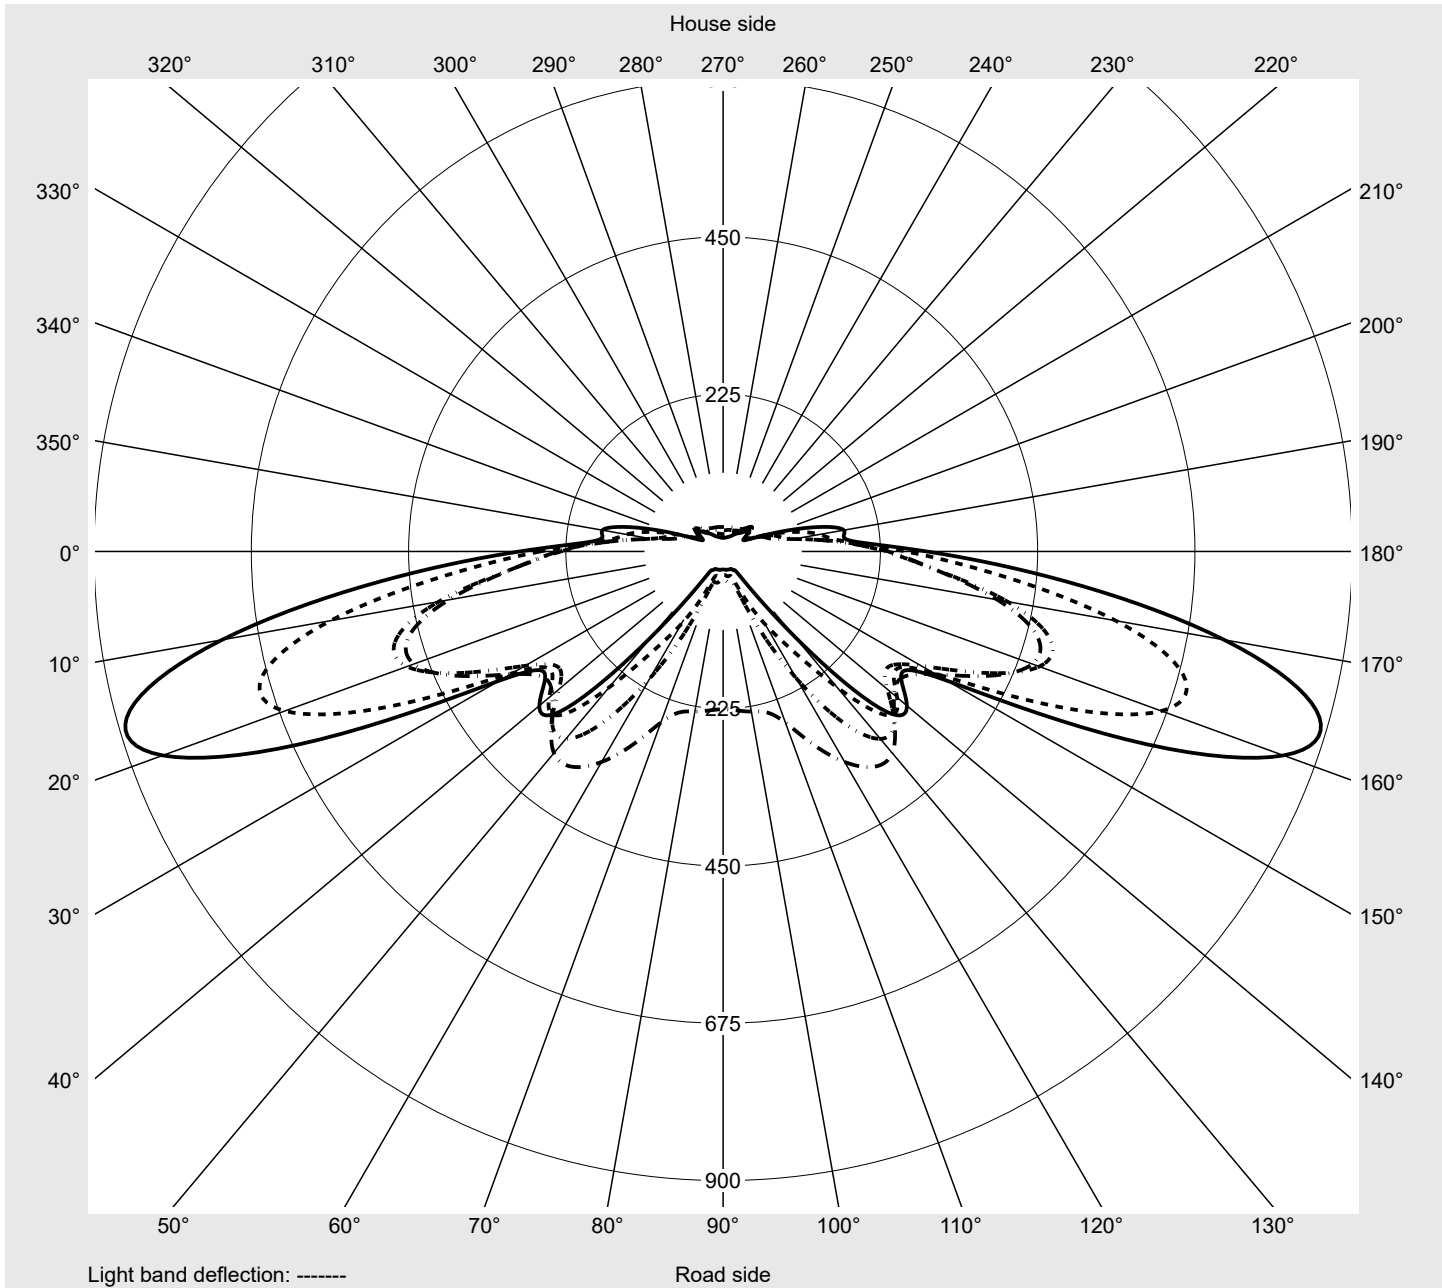

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	267.2	267.2	267.4	267.7	268.0	268.2	268.3	268.4	268.7	268.6	268.6	268.7	268.7
5,0°	266.9	266.9	267.2	267.8	268.6	268.9	269.1	269.3	269.8	269.6	269.6	269.8	269.9
7,5°	266.5	266.7	267.4	268.3	269.0	269.1	269.0	269.1	269.2	269.0	268.6	268.3	268.2
10,0°	266.2	266.6	267.5	268.8	269.4	269.4	269.0	268.9	268.7	268.3	267.5	266.8	266.5
12,5°	265.7	266.8	267.7	268.9	269.3	269.2	268.7	268.4	268.0	267.7	267.2	266.8	266.7
15,0°	265.2	267.0	267.9	269.1	269.2	269.1	268.3	267.9	267.3	267.0	266.9	266.8	267.0
17,5°	265.2	267.9	268.8	269.7	270.1	270.0	269.8	269.8	269.9	270.4	270.8	271.1	271.6
20,0°	265.1	268.9	269.6	270.3	271.0	270.8	271.2	271.7	272.4	273.8	274.7	275.4	276.3
22,5°	264.0	268.4	269.8	270.7	272.2	273.3	274.8	276.9	278.7	280.6	282.2	283.8	285.0
25,0°	262.8	268.0	269.9	271.2	273.4	275.7	278.4	282.1	285.0	287.4	289.7	292.2	293.7
27,5°	262.3	269.0	271.7	274.3	277.9	281.8	286.1	291.1	295.3	299.0	301.4	302.9	302.7
30,0°	261.9	269.9	273.5	277.4	282.5	287.8	293.9	300.0	305.5	310.6	313.1	313.5	311.7
32,5°	261.8	271.7	277.3	283.5	291.4	299.5	307.7	315.0	321.0	325.6	326.4	323.2	318.0
35,0°	261.7	273.6	281.1	289.6	300.3	311.1	321.4	329.9	336.4	340.6	339.8	332.9	324.3
37,5°	252.3	268.4	281.4	296.0	311.7	326.6	338.9	348.1	353.7	354.6	350.3	339.3	327.6
40,0°	243.0	263.2	281.8	302.4	323.1	342.1	356.4	366.4	370.9	368.7	360.7	345.6	330.9
42,5°	229.8	256.4	281.5	309.4	338.2	363.9	378.3	385.7	385.6	377.9	365.2	348.0	332.0
45,0°	216.5	249.6	281.2	316.3	353.3	385.7	400.3	405.0	400.3	387.0	369.7	350.4	333.1
47,5°	219.3	258.6	295.9	335.0	373.2	403.4	416.6	415.9	404.4	385.7	366.0	350.2	338.2
50,0°	222.0	267.6	310.6	353.7	393.0	421.0	433.0	426.9	408.5	384.3	362.2	350.0	343.3
52,5°	230.3	281.2	331.6	380.9	415.7	432.1	429.8	415.1	391.8	372.1	363.5	370.8	388.4
55,0°	238.5	294.7	352.7	408.1	438.3	443.1	426.6	403.4	375.0	359.8	364.8	391.6	433.4
57,5°	239.2	300.2	368.4	426.7	449.2	436.9	401.3	371.3	353.4	354.2	384.0	423.0	459.6
60,0°	239.9	305.7	384.0	445.2	460.1	430.6	376.1	339.2	331.9	348.6	403.2	454.3	485.7
62,5°	236.0	306.5	398.6	464.7	470.8	420.8	351.7	313.7	319.3	347.2	376.6	376.0	347.7
65,0°	232.2	307.3	413.1	484.1	481.4	410.9	327.3	288.2	306.7	345.7	350.0	297.8	209.7
67,5°	261.7	400.0	570.4	681.4	667.3	523.6	348.4	299.5	324.9	331.4	253.7	172.7	120.4
70,0°	291.2	492.6	727.8	878.7	853.1	636.3	369.5	310.8	343.1	317.0	157.5	47.7	31.0
72,5°	353.0	430.5	526.3	594.6	600.5	549.8	505.8	527.8	350.6	186.2	90.1	34.6	25.1
75,0°	414.8	368.5	324.8	310.5	347.9	463.4	642.1	744.8	358.1	55.4	22.7	21.6	19.3
77,5°	236.0	205.6	178.8	168.2	183.7	239.0	334.0	387.5	184.9	33.3	17.6	16.7	14.7
80,0°	57.3	42.7	32.7	25.9	19.4	14.6	25.9	30.2	11.7	11.3	12.5	11.9	10.0
82,5°	30.0	22.6	17.5	14.0	10.7	8.3	13.9	16.1	6.8	6.6	7.4	7.1	6.4
85,0°	2.7	2.5	2.3	2.2	2.1	2.0	2.0	2.0	2.0	2.0	2.3	2.4	2.7
87,5°	1.4	1.3	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	268.8	268.7	268.8	268.9	268.9	269.0	266.5	265.7	264.9	264.3	263.2	262.1	260.9
5,0°	270.0	269.8	270.0	270.2	270.3	270.5	265.5	264.0	262.3	261.0	259.0	256.8	254.3
7,5°	268.1	268.0	267.8	268.0	268.1	268.3	264.6	261.7	258.5	254.8	250.1	245.2	240.0
10,0°	266.2	266.2	265.6	265.7	265.9	266.2	263.7	259.4	254.8	248.5	241.2	233.7	225.8
12,5°	266.6	266.7	266.6	266.8	267.1	267.4	262.2	256.2	248.7	239.4	229.0	218.0	206.6
15,0°	267.0	267.3	267.5	267.9	268.3	268.7	260.7	253.0	242.7	230.3	216.7	202.2	187.3
17,5°	271.9	272.4	272.7	273.3	273.7	274.2	260.0	249.6	236.0	220.1	202.7	184.7	166.5
20,0°	276.9	277.5	277.9	278.7	279.1	279.7	259.3	246.2	229.2	209.9	188.8	167.2	145.7
22,5°	285.7	286.0	285.3	285.9	286.0	286.6	256.1	240.7	220.9	197.9	173.1	148.9	124.7
25,0°	294.5	294.4	292.7	293.2	293.0	293.5	253.0	235.1	212.5	186.0	157.4	130.7	103.7
27,5°	301.7	299.6	296.6	295.1	294.3	294.5	249.8	229.0	203.1	173.2	142.1	112.9	90.5
30,0°	308.9	304.7	300.5	297.1	295.6	295.6	246.5	222.9	193.6	160.4	126.8	95.2	77.3
32,5°	313.0	307.3	302.0	297.5	295.4	295.3	243.8	216.9	184.3	148.5	113.2	85.2	75.5
35,0°	317.0	310.0	303.6	298.0	295.1	294.9	241.1	211.0	175.1	136.5	99.5	75.1	73.7
37,5°	317.8	309.7	303.3	296.8	293.1	292.9	227.5	194.9	159.3	122.5	89.6	70.6	71.2
40,0°	318.5	309.4	303.1	295.7	291.1	290.8	213.8	178.8	143.5	108.6	79.7	66.1	68.6
42,5°	318.9	309.7	303.7	297.1	292.4	291.8	194.6	156.5	121.9	92.6	71.9	63.8	66.0
45,0°	319.2	310.1	304.3	298.5	293.8	292.9	175.4	134.2	100.3	76.6	64.1	61.5	63.3
47,5°	329.8	326.0	323.9	321.0	317.3	316.6	170.5	122.9	87.3	67.9	61.3	60.6	62.1
50,0°	340.3	341.9	343.4	343.5	340.8	340.4	165.5	111.6	74.4	59.3	58.4	59.8	60.9
52,5°	405.0	419.9	430.4	434.7	431.6	430.6	167.0	108.2	68.4	56.2	56.5	57.5	57.6
55,0°	469.7	498.0	517.3	525.9	522.3	520.8	168.4	104.8	62.4	53.0	54.6	55.3	54.3
57,5°	478.3	480.2	474.1	472.9	468.6	465.7	167.5	102.3	61.0	53.3	50.4	50.0	50.6
60,0°	486.8	462.4	430.8	419.9	414.9	410.5	166.7	99.7	59.6	53.6	46.2	44.6	46.9
62,5°	304.6	260.5	238.2	232.6	228.3	225.8	164.6	102.3	71.0	60.8	46.8	42.1	46.4
65,0°	122.3	58.5	45.5	45.3	41.7	41.1	162.5	104.9	82.5	68.0	47.5	39.6	45.8
67,5°	75.0	42.9	36.1	36.0	33.8	33.5	171.9	140.1	107.9	72.2	44.8	36.5	43.4
70,0°	27.6	27.3	26.7	26.8	26.0	25.9	181.3	175.3	133.4	76.4	42.1	33.3	41.1
72,5°	22.7	22.0	21.3	21.1	20.5	20.3	265.1	189.7	120.0	62.2	33.7	27.5	35.0
75,0°	17.7	16.6	15.9	15.3	15.0	14.8	348.9	204.0	106.7	47.9	25.3	21.8	29.0
77,5°	13.1	12.5	11.5	11.1	10.8	10.6	193.6	113.1	59.4	29.8	17.4	15.8	20.3
80,0°	8.4	8.3	7.2	6.9	6.6	6.5	38.3	22.1	12.2	11.8	9.4	9.8	11.6
82,5°	5.4	5.2	4.5	4.3	4.1	4.0	20.5	12.5	7.6	7.4	6.0	6.3	7.0
85,0°	2.3	2.1	1.8	1.7	1.6	1.5	2.8	2.8	2.9	2.9	2.7	2.7	2.5
87,5°	1.1	1.0	0.9	0.8	0.8	0.7	1.4	1.4	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	0.4	0.4
2,5°	259.6	258.4	257.3	256.2	255.1	254.3	253.6	253.0	252.6	252.4	252.3	3.2	3.6
5,0°	251.7	249.4	247.1	244.9	242.7	241.1	239.8	238.5	237.7	237.3	237.2	6.2	9.8
7,5°	234.8	230.1	225.2	220.5	216.3	213.0	210.1	207.9	206.2	205.4	204.8	9.0	18.7
10,0°	217.9	210.8	203.4	196.1	189.9	184.8	180.4	177.3	174.8	173.4	172.5	11.5	30.2
12,5°	195.6	185.0	175.2	166.1	158.0	151.4	146.3	142.8	140.4	139.1	138.4	13.6	43.8
15,0°	173.3	159.2	147.1	136.1	126.1	118.1	112.2	108.3	106.0	104.7	104.3	15.5	59.4
17,5°	149.3	133.3	121.0	111.9	105.2	100.8	98.1	96.7	95.8	95.3	95.2	17.6	76.9
20,0°	125.4	107.5	94.9	87.6	84.4	83.5	84.0	85.2	85.7	85.9	86.1	19.5	96.4
22,5°	105.4	93.2	87.8	86.3	86.0	85.8	85.4	85.1	84.3	83.6	83.3	21.7	118.1
25,0°	85.5	78.9	80.6	84.9	87.6	88.0	86.8	84.9	82.9	81.2	80.5	23.8	141.9
27,5°	81.2	81.9	85.3	88.0	88.0	85.8	82.5	79.3	76.2	74.0	73.1	26.1	168.0
30,0°	77.0	84.8	90.0	91.2	88.3	83.6	78.3	73.6	69.6	66.7	65.7	28.2	196.2
32,5°	79.1	85.7	88.8	87.8	84.1	79.6	75.2	71.9	69.4	67.7	67.1	30.6	226.8
35,0°	81.2	86.7	87.6	84.5	79.9	75.6	72.2	70.2	69.3	68.6	68.4	32.9	259.7
37,5°	76.3	79.2	78.9	77.1	76.1	74.0	71.1	69.2	67.9	67.1	66.7	34.9	294.6
40,0°	71.3	71.6	70.3	69.7	72.4	72.5	70.0	68.2	66.6	65.5	65.1	36.8	331.3
42,5°	67.4	67.5	68.8	69.1	68.9	68.5	66.8	65.5	64.3	63.3	62.9	38.5	369.8
45,0°	63.5	63.4	67.3	68.6	65.4	64.6	63.6	62.8	62.0	61.1	60.7	40.2	410.1
47,5°	62.2	64.8	65.8	64.2	61.6	61.0	60.1	59.3	58.4	57.5	57.2	42.8	452.8
50,0°	60.9	66.1	64.2	59.8	57.9	57.4	56.6	55.8	54.8	53.9	53.6	45.3	498.1
52,5°	59.8	63.6	59.5	55.6	53.9	53.3	52.6	51.7	50.6	49.9	49.7	50.1	548.1
55,0°	58.6	61.0	54.8	51.4	50.0	49.2	48.5	47.6	46.5	45.9	45.9	55.0	603.1
57,5°	57.5	56.2	50.1	47.2	46.0	45.1	44.4	43.8	43.2	42.8	42.8	55.3	658.4
60,0°	56.4	51.4	45.4	43.1	42.0	41.0	40.4	40.0	39.8	39.7	39.6	55.4	713.8
62,5°	54.0	47.8	42.0	39.7	38.3	37.1	36.5	36.0	35.5	35.1	35.0	47.7	761.5
65,0°	51.6	44.2	38.6	36.3	34.6	33.2	32.5	31.9	31.2	30.5	30.5	39.5	800.9
67,5°	48.3	41.4	36.3	33.4	30.6	28.5	27.4	26.5	25.7	25.0	24.9	43.3	844.2
70,0°	45.1	38.6	34.0	30.6	26.6	23.9	22.2	21.1	20.1	19.6	19.4	47.1	891.3
72,5°	38.7	34.3	30.3	25.9	21.5	18.5	16.7	15.5	14.5	14.0	13.8	42.6	933.9
75,0°	32.4	30.0	26.6	21.3	16.4	13.1	11.3	10.0	9.0	8.3	8.1	37.9	971.7
77,5°	22.7	22.3	20.0	15.8	11.7	9.2	7.7	6.6	5.6	4.9	4.7	21.1	992.8
80,0°	13.0	14.5	13.5	10.3	7.0	5.2	4.2	3.1	2.2	1.5	1.3	4.0	996.9
82,5°	7.7	8.3	7.6	6.0	4.2	3.2	2.6	2.0	1.5	1.0	0.9	2.3	999.2
85,0°	2.3	2.1	1.8	1.7	1.5	1.3	1.0	0.8	0.7	0.6	0.6	0.6	999.7
87,5°	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4340	39.1	40.8	40.0
95	238	252	4120	36.6	38.1	37.4
90	223	249	3909	34.2	35.7	35.0
85	208	247	3691	31.9	33.3	32.6
80	193	244	3468	29.7	30.9	30.3
75	179	241	3255	27.5	28.6	28.0
70	165	238	3038	25.4	26.5	26.0
65	152	235	2828	23.4	24.4	23.9
60	138	232	2600	21.3	22.2	21.8
55	125	228	2383	19.4	20.2	19.8
50	113	224	2177	17.7	18.4	18.0
45	100	220	1950	15.8	16.5	16.2
40	88	215	1736	14.1	14.6	14.4
35	76	210	1515	12.4	12.9	12.6
30	65	204	1310	10.8	11.2	11.0
25	53	197	1081	9.2	9.5	9.4
20	42	188	868	7.7	7.8	7.8
15	31	177	651	6.1	6.3	6.2
12	24	168	510	5.1	5.3	5.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4450	39.6	41.3	40.4
95	239	252	4234	37.2	38.8	38.0
90	223	249	3999	34.7	36.1	35.4
85	209	247	3788	32.5	33.9	33.2
80	194	244	3556	30.1	31.5	30.8
75	180	241	3337	28.0	29.1	28.6
70	166	238	3112	25.9	27.0	26.4
65	153	235	2898	24.0	24.9	24.4
60	139	232	2663	21.8	22.7	22.2
55	126	228	2440	19.9	20.7	20.3
50	114	225	2230	18.1	18.9	18.5
45	101	220	1999	16.1	16.8	16.5
40	89	216	1779	14.5	15.0	14.8
35	77	210	1556	12.8	13.2	13.0
30	65	204	1328	11.0	11.4	11.2
25	54	197	1115	9.4	9.8	9.6
20	43	189	899	7.9	8.2	8.0
15	31	177	658	6.2	6.4	6.3
12	24	168	516	5.2	5.4	5.3

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
--	--	-------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4400	39.3	41.0	40.2
95	238	252	4175	36.8	38.3	37.6
90	223	249	3958	34.4	35.9	35.2
85	208	247	3736	32.1	33.5	32.8
80	194	244	3523	29.9	31.3	30.6
75	180	241	3307	27.8	28.9	28.4
70	166	238	3085	25.7	26.8	26.2
65	152	235	2858	23.6	24.6	24.1
60	139	232	2643	21.7	22.5	22.1
55	126	228	2423	19.8	20.5	20.2
50	113	224	2197	17.8	18.5	18.2
45	101	220	1985	16.0	16.7	16.4
40	89	216	1768	14.3	14.9	14.6
35	77	210	1546	12.7	13.1	12.9
30	65	204	1321	10.9	11.3	11.1
25	54	197	1109	9.4	9.7	9.6
20	42	188	875	7.7	7.9	7.8
15	31	177	655	6.2	6.4	6.3
12	24	168	513	5.2	5.3	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U57N08DB EAN: 4058352995310	LP number 59536_85
--	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	4340.0	39.1
5.0	4450.0	39.6
15.0	4400.0	39.3