


# Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
<b>Version</b>	post-top- or mounting to wall arm, shielding on building side, Smart Interface down	<b>serial documentation</b> 18.03.2024
<b>Optic</b>	asymmetric, wide distribution (ST1.2a)	
<b>Cover</b>	cover transparent, PMMA	
<b>Lamps</b>	LED 3000 K   CRI ≥ 70	
<b>Controlgear</b>	EVG SITECO iQ - Smart Interface	
<b>Rated values</b>	Net luminous flux = 4660 lm Power consumption = 33.5 W Luminous efficacy = 139.1 lm/W	<b>siteco</b>

**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 762 cd/klm**

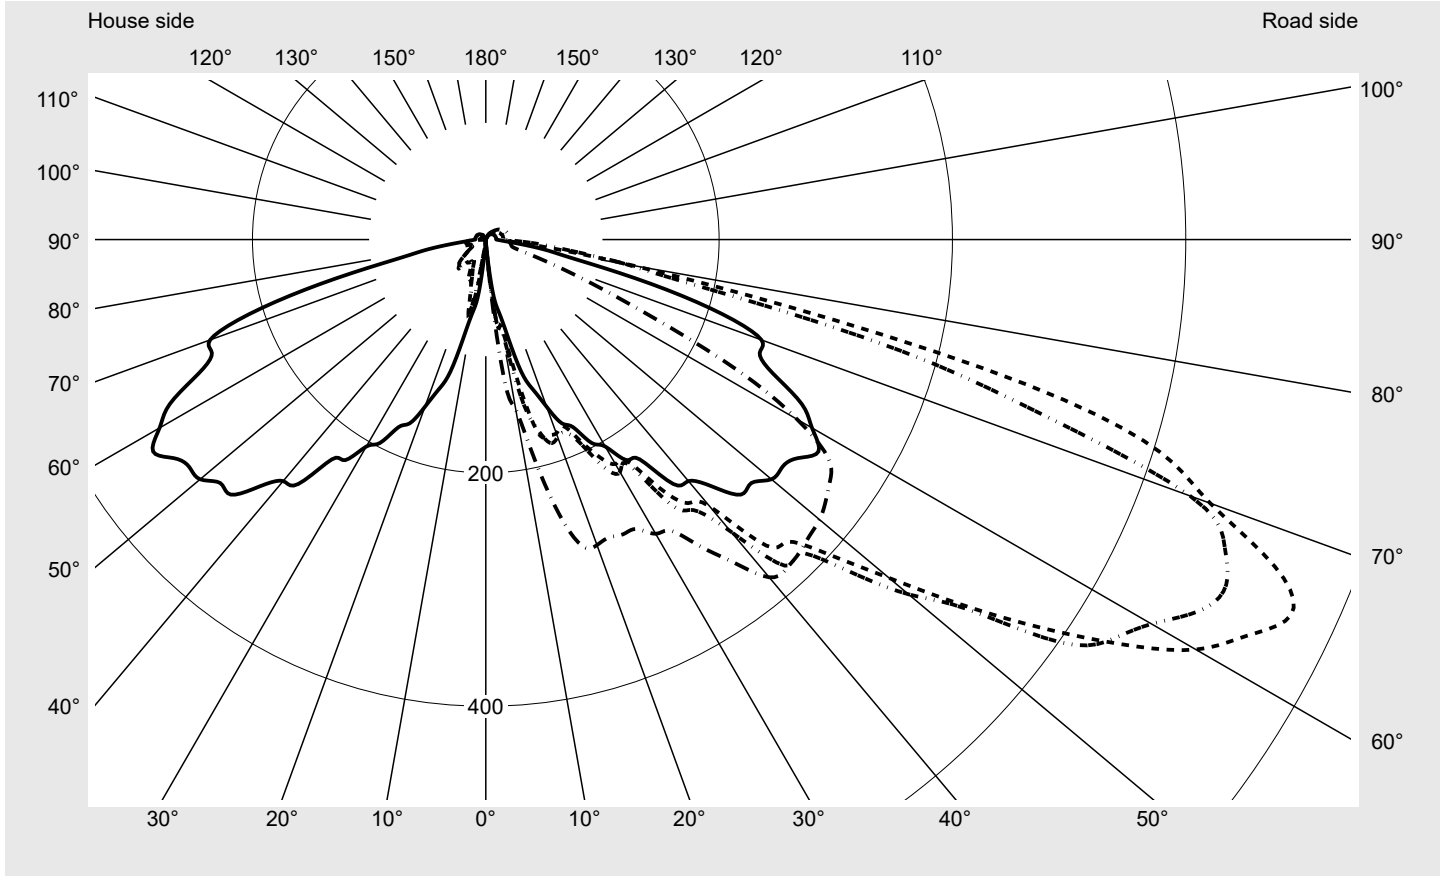

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	95.3%
Eta 90° - 180°	4.7%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	660.8
Imax 80°	154.4
Imax 90°	20.3
Imax >90°	20.3
Imax >95°	20.1


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
---------------------------	---	------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**      **siteco**

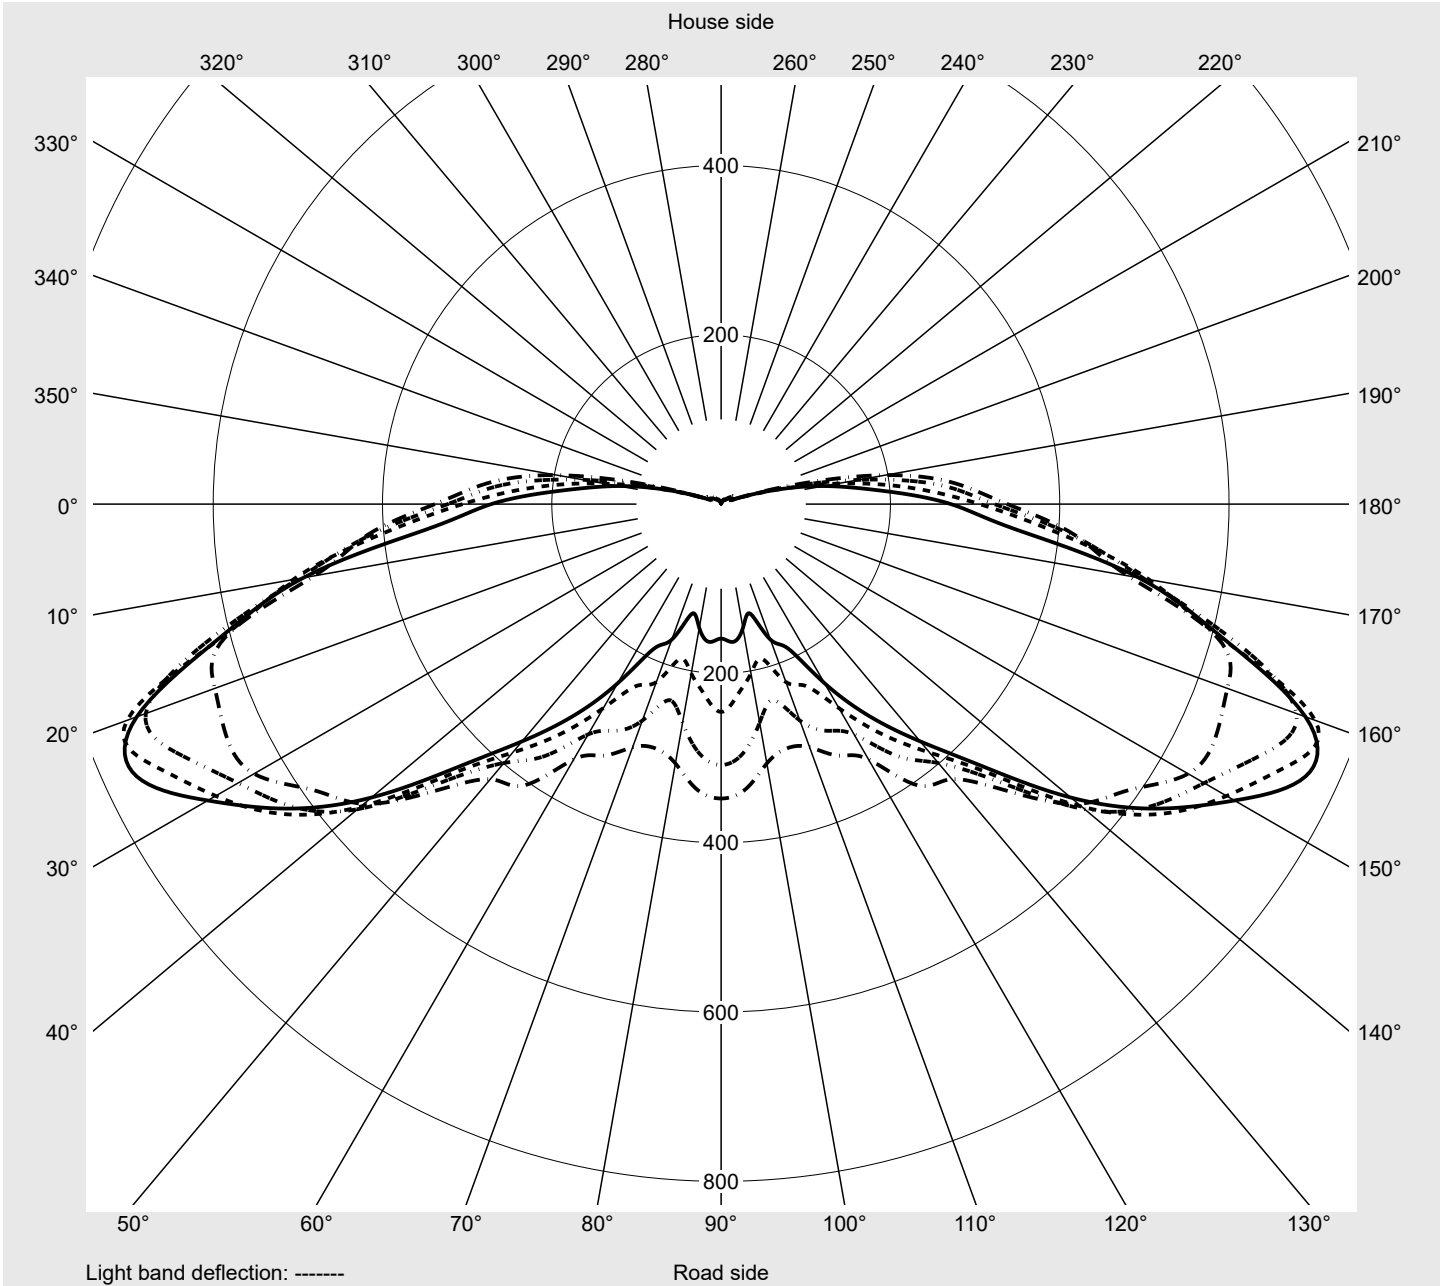

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	4.4	4.4	4.7	4.9	5.1	5.2	5.6	5.8	5.9	6.1	6.1	6.4	6.4
5,0°	9.7	11.2	12.9	14.1	15.4	17.9	21.2	24.7	27.1	29.6	30.8	31.3	31.2
7,5°	45.0	52.8	60.1	64.5	69.6	72.6	72.8	70.1	69.9	70.9	72.8	76.5	85.0
10,0°	62.1	66.5	68.9	72.8	75.3	75.5	77.5	83.3	91.4	105.8	119.2	126.1	132.6
12,5°	82.1	84.1	90.4	96.7	103.8	118.7	136.0	155.1	162.9	158.8	154.2	158.1	165.6
15,0°	117.2	121.9	138.5	149.0	162.4	170.2	166.8	172.5	178.6	179.8	180.5	186.6	190.3
17,5°	134.9	153.4	167.4	175.2	174.1	176.3	182.7	192.5	192.2	192.8	200.8	204.5	208.1
20,0°	152.5	162.5	166.6	173.4	177.3	176.8	180.1	177.9	188.8	192.3	195.2	202.3	209.3
22,5°	170.5	182.3	183.7	178.6	177.1	173.0	179.0	188.4	194.7	193.5	206.9	215.5	222.1
25,0°	177.6	181.5	195.7	193.7	197.9	189.3	193.4	202.7	209.4	214.9	219.1	231.1	245.5
27,5°	196.6	211.3	201.3	200.5	202.7	209.6	220.3	223.5	231.4	234.5	245.8	254.0	266.0
30,0°	204.9	212.0	221.5	215.2	215.7	222.1	230.1	252.1	257.5	261.6	270.2	284.8	292.2
32,5°	224.2	227.6	220.4	221.8	222.5	224.5	229.1	248.2	268.9	281.7	290.5	304.3	309.7
35,0°	229.9	237.4	247.2	237.2	249.2	260.2	278.0	295.6	305.6	326.4	332.9	335.4	343.5
37,5°	264.1	262.1	254.5	264.3	275.1	284.8	292.2	315.6	334.2	343.5	360.6	362.7	368.4
40,0°	270.2	270.7	270.1	268.4	277.3	298.5	326.8	342.9	362.2	376.7	378.2	391.4	396.5
42,5°	287.0	288.5	300.2	304.9	323.7	355.7	379.1	396.0	407.4	422.1	421.9	420.9	412.6
45,0°	309.2	301.5	308.8	309.3	329.1	366.2	380.3	411.3	434.8	448.2	453.8	431.7	430.9
47,5°	308.8	309.2	323.6	337.8	358.6	400.1	419.6	450.9	455.4	456.8	461.4	445.3	443.3
50,0°	319.7	342.0	368.4	399.2	393.8	451.2	473.1	485.8	468.7	461.5	458.7	444.6	432.1
52,5°	320.3	368.9	398.4	476.6	470.9	514.0	520.5	525.9	498.4	481.9	459.0	446.3	414.3
55,0°	326.6	395.0	425.6	538.7	556.5	579.5	602.2	555.0	535.9	486.6	451.6	431.7	375.9
57,5°	338.1	419.6	488.0	606.1	636.4	645.4	637.1	588.7	550.8	479.5	424.1	405.7	348.1
60,0°	322.9	415.5	507.3	629.2	723.3	702.8	659.0	621.5	560.8	463.4	399.2	363.3	314.1
62,5°	305.4	402.1	513.3	612.1	746.8	735.5	689.4	637.5	556.0	450.7	383.1	331.8	278.2
65,0°	271.6	351.5	501.2	614.6	734.6	761.6	700.3	627.1	539.3	438.9	365.9	306.1	244.3
67,5°	254.1	307.3	450.7	571.3	709.1	731.9	685.4	611.9	514.7	406.5	341.7	278.2	208.1
70,0°	251.4	326.1	450.5	563.1	644.7	660.8	642.5	541.6	452.2	369.9	306.8	245.5	179.1
72,5°	212.8	328.5	389.6	530.8	607.8	606.1	503.0	453.1	364.9	290.2	232.6	189.8	151.9
75,0°	146.5	260.4	336.6	456.0	486.6	479.5	368.1	318.6	216.5	190.6	183.7	170.3	141.9
77,5°	81.4	146.5	219.6	291.4	322.2	266.2	195.4	173.2	146.3	131.2	131.4	131.4	122.1
80,0°	54.0	73.5	108.7	132.1	154.4	127.7	122.8	133.6	104.0	75.5	57.7	51.3	60.3
82,5°	30.8	39.8	45.0	58.1	67.4	57.2	73.7	95.3	78.9	50.5	31.5	27.4	22.5
85,0°	16.9	19.0	17.8	17.6	18.3	24.9	47.6	58.2	45.0	29.5	23.5	21.5	20.1
87,5°	11.7	12.2	13.2	14.4	16.6	19.8	25.2	27.3	22.2	19.3	19.6	19.6	19.5
90,0°	9.1	10.5	11.5	12.5	14.1	15.2	16.3	17.1	17.6	18.3	18.6	19.0	19.1
92,5°	9.1	10.5	11.3	12.4	13.9	15.1	16.3	16.9	17.6	18.1	18.5	19.0	19.1
95,0°	9.1	10.2	11.2	12.4	13.7	15.1	16.1	16.9	17.6	18.1	18.5	18.8	19.1
97,5°	9.0	10.2	11.2	12.4	13.7	14.9	15.9	16.9	17.6	17.9	18.5	18.8	19.1
100,0°	9.0	10.2	11.2	12.0	13.7	14.9	15.9	16.8	17.3	17.9	18.3	18.6	18.8
102,5°	8.8	10.0	11.2	12.0	13.5	14.9	15.7	16.6	17.3	17.8	18.1	18.5	18.8
105,0°	8.8	10.0	10.8	12.0	13.4	14.6	15.6	16.4	16.9	17.4	17.8	18.5	18.6
107,5°	8.6	9.8	10.8	11.7	13.2	14.2	15.2	16.1	16.8	17.1	17.8	18.1	18.3
110,0°	8.5	9.7	10.5	11.5	12.9	13.9	14.9	15.7	16.4	16.8	17.4	17.8	17.9
112,5°	8.5	9.5	10.5	11.2	12.5	13.5	14.4	15.2	15.9	16.4	16.9	17.3	17.6

## Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575EU14HP00022 + 5XA54000XBXL</b> <b>EAN: 4069025027221 + 4058352415573</b>	<b>LP number</b> <b>59426_98</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
2,5°	6.8	6.6	6.8	6.8	6.8	6.8	4.2	4.1	4.1	4.1	3.9	3.9	3.9
5,0°	29.5	28.6	26.9	25.7	24.9	24.0	8.6	8.0	7.1	6.4	5.8	5.4	4.7
7,5°	95.5	104.8	107.9	110.7	121.1	120.9	38.6	29.0	19.6	14.6	9.7	6.9	5.8
10,0°	139.5	141.2	143.2	142.4	144.4	148.0	62.8	68.7	66.4	56.2	42.2	27.3	17.1
12,5°	173.4	187.6	189.6	187.8	189.8	192.3	75.3	72.0	64.7	60.6	63.3	65.5	59.9
15,0°	203.8	219.1	230.1	235.3	244.7	244.5	106.8	93.3	71.3	55.4	52.8	50.3	48.8
17,5°	215.0	228.7	245.2	259.4	269.7	275.3	117.8	101.4	70.3	46.7	42.5	41.3	40.1
20,0°	222.0	237.4	255.0	269.0	275.8	278.7	137.5	122.2	82.8	44.5	37.8	34.5	31.2
22,5°	230.6	238.2	253.1	267.3	275.6	276.3	158.5	144.3	100.4	49.8	39.8	29.6	24.0
25,0°	255.2	258.9	266.2	275.6	278.7	278.7	165.4	147.6	101.1	40.3	33.9	25.6	20.7
27,5°	274.8	277.2	283.9	286.1	282.1	279.7	183.9	160.7	107.7	32.8	28.3	21.8	19.0
30,0°	301.5	299.0	292.9	291.6	288.3	291.2	191.3	178.6	112.3	28.1	23.9	20.1	18.3
32,5°	320.3	315.1	304.6	301.0	301.5	296.0	217.2	193.9	119.2	26.9	22.0	19.8	18.5
35,0°	343.9	333.4	323.0	320.7	322.0	321.4	214.5	189.8	119.2	29.1	23.9	19.8	19.1
37,5°	372.7	369.8	355.6	344.9	349.3	348.8	245.3	211.1	133.1	30.3	24.7	23.0	22.7
40,0°	402.8	393.8	362.5	357.1	369.9	377.9	248.9	219.1	135.6	31.7	26.6	25.7	25.1
42,5°	421.9	400.8	369.8	371.8	380.1	382.0	274.3	222.1	133.2	34.7	33.5	29.1	28.1
45,0°	429.5	404.0	367.7	372.8	381.1	379.9	299.8	242.8	144.6	34.2	32.5	34.0	32.7
47,5°	432.2	391.4	366.7	374.0	380.3	376.2	295.8	225.4	126.6	32.3	30.8	31.7	31.8
50,0°	424.6	377.7	358.8	368.4	376.5	373.5	296.1	225.4	121.9	28.8	27.4	28.6	25.9
52,5°	402.6	364.0	349.6	357.6	369.1	367.4	292.9	227.2	114.1	25.6	23.9	24.2	21.8
55,0°	365.2	342.2	335.1	342.5	359.6	360.3	295.3	222.6	101.9	22.7	20.0	20.7	18.8
57,5°	327.8	305.6	298.8	311.0	337.6	347.8	278.5	197.1	84.0	20.1	17.3	17.6	16.6
60,0°	295.4	272.1	239.7	262.1	295.6	308.1	259.4	164.9	71.1	17.3	14.2	14.7	14.7
62,5°	237.0	223.7	189.5	203.2	225.9	245.5	223.5	139.7	61.0	17.6	13.7	13.0	12.4
65,0°	188.8	170.3	134.3	148.5	163.4	158.8	186.7	122.9	62.5	19.5	14.6	13.5	11.5
67,5°	154.2	119.5	84.1	95.0	100.6	98.2	176.9	113.4	59.8	19.8	15.2	13.4	10.8
70,0°	129.5	92.1	51.6	48.4	51.6	56.6	170.7	112.1	60.1	17.6	13.5	11.9	10.2
72,5°	106.0	60.4	35.6	29.3	28.4	30.5	149.8	102.9	56.2	20.1	15.4	12.2	10.5
75,0°	86.2	34.4	27.4	24.0	23.5	23.4	102.9	74.5	49.3	23.5	21.0	16.1	12.0
77,5°	53.3	26.6	23.2	22.2	22.2	22.3	57.9	48.6	42.3	23.0	20.7	16.3	11.7
80,0°	24.4	22.2	21.5	21.5	21.5	21.7	44.7	42.0	34.2	22.2	19.5	17.3	12.9
82,5°	21.0	20.5	20.7	20.8	21.0	21.0	28.8	26.6	23.9	17.4	15.9	13.2	10.2
85,0°	20.0	20.0	20.3	20.5	20.7	20.7	15.6	15.6	16.6	17.4	15.7	13.0	8.8
87,5°	19.6	20.0	20.1	20.5	20.5	20.3	11.0	11.0	11.7	11.7	10.7	9.1	7.6
90,0°	19.5	19.8	20.1	20.1	20.3	20.3	8.0	6.6	5.4	4.7	4.1	3.7	3.4
92,5°	19.5	19.8	20.1	20.1	20.3	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
95,0°	19.5	19.8	20.0	20.1	20.1	20.3	7.8	6.4	5.2	4.4	4.1	3.6	3.2
97,5°	19.5	19.5	19.8	20.1	20.1	20.0	7.8	6.4	5.1	4.6	3.9	3.6	3.2
100,0°	19.1	19.5	19.8	20.0	20.1	20.0	7.8	6.4	5.2	4.6	4.1	3.6	3.4
102,5°	19.1	19.5	19.8	19.8	20.0	19.6	7.8	6.4	5.2	4.4	3.9	3.6	3.0
105,0°	18.8	19.1	19.5	19.6	19.6	19.6	7.6	6.3	5.1	4.4	3.9	3.6	3.2
107,5°	18.6	18.8	19.1	19.5	19.3	19.3	7.5	6.1	5.1	4.4	3.9	3.6	3.0
110,0°	18.3	18.6	18.8	19.1	19.1	19.0	7.5	6.1	5.1	4.4	3.9	3.6	3.0
112,5°	17.8	18.1	18.5	18.6	18.6	18.6	7.5	6.1	5.1	4.4	3.9	3.6	3.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sitEco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	0.0	0.0
2,5°	3.9	3.9	3.9	4.2	4.4	4.7	4.4	4.2	4.2	3.9	3.7	0.1	0.1
5,0°	4.4	4.1	3.9	3.7	3.6	3.4	3.4	3.4	3.4	3.2	3.0	0.3	0.4
7,5°	4.7	3.9	3.7	3.6	3.4	3.6	3.6	3.4	3.2	3.2	3.0	1.6	2.0
10,0°	11.7	8.5	5.6	4.4	3.4	2.9	2.7	2.5	2.4	2.2	2.0	3.1	5.1
12,5°	43.5	27.3	15.1	7.1	3.7	3.2	2.5	2.2	1.9	1.9	1.7	5.4	10.5
15,0°	48.1	50.6	46.2	29.8	12.0	4.6	2.2	1.7	1.5	1.5	1.7	8.0	18.5
17,5°	38.3	36.6	35.2	24.2	14.6	6.9	2.0	1.7	1.5	1.5	1.4	9.9	28.4
20,0°	29.3	27.3	26.6	17.6	10.3	4.9	1.9	1.7	1.5	1.5	1.4	11.4	39.8
22,5°	22.2	21.3	18.8	13.2	7.6	3.9	1.7	1.5	1.4	1.2	1.4	13.1	52.9
25,0°	19.1	17.3	15.6	11.2	6.4	3.4	1.7	1.5	1.4	1.2	1.0	15.3	68.2
27,5°	18.1	15.9	15.1	10.7	5.8	3.4	1.7	1.5	1.4	1.2	1.0	17.8	86.0
30,0°	17.9	16.8	15.7	11.3	5.8	3.2	1.9	1.5	1.4	1.2	1.0	20.6	106.6
32,5°	18.1	17.4	16.1	11.2	6.4	3.4	1.9	1.5	1.4	1.2	1.0	23.2	129.7
35,0°	19.8	17.8	16.1	11.5	7.1	3.7	1.9	1.4	1.4	1.2	1.0	27.0	156.7
37,5°	20.0	18.3	15.7	11.5	7.8	3.9	1.7	1.5	1.4	1.2	1.0	31.2	187.9
40,0°	23.9	20.1	14.9	11.2	9.0	4.4	1.9	1.4	1.2	1.2	1.0	34.8	222.7
42,5°	26.2	20.8	15.9	12.2	8.8	5.4	2.2	1.5	1.2	1.0	1.0	39.6	262.3
45,0°	27.3	21.0	15.6	11.9	9.3	5.2	2.7	2.0	1.2	1.0	1.0	43.0	305.3
47,5°	27.4	20.1	14.7	11.3	9.3	5.4	2.5	1.9	1.4	1.0	1.0	45.9	351.2
50,0°	21.8	17.8	13.7	10.7	9.5	5.6	2.5	1.9	1.4	1.0	1.0	49.2	400.4
52,5°	18.8	15.1	11.7	9.3	8.5	5.8	2.7	1.9	1.2	1.0	1.0	52.7	453.1
55,0°	16.3	13.4	10.0	8.1	7.3	5.2	2.7	2.0	1.2	1.0	0.7	55.9	509.0
57,5°	14.2	11.3	8.3	7.1	6.4	4.9	2.7	1.9	1.2	0.8	0.7	57.9	566.8
60,0°	12.0	9.0	6.8	6.3	5.9	4.2	2.5	1.9	1.2	1.0	0.7	58.1	624.9
62,5°	10.3	7.6	5.9	5.4	5.4	4.1	2.7	1.9	1.2	1.0	0.7	56.5	681.5
65,0°	9.0	7.1	5.9	5.2	5.1	4.1	2.9	2.0	1.5	1.2	1.0	53.9	735.4
67,5°	8.8	7.3	5.9	5.1	4.9	4.2	3.0	2.2	1.7	1.4	1.0	50.1	785.6
70,0°	8.8	7.3	5.9	5.1	4.6	4.1	3.0	2.4	1.9	1.5	1.4	46.3	831.9
72,5°	8.6	6.8	5.6	4.6	4.1	3.7	2.9	2.2	1.9	1.5	1.4	40.3	872.2
75,0°	9.5	6.3	5.1	4.2	3.6	3.0	2.5	2.0	1.9	1.7	1.4	31.6	903.8
77,5°	8.3	5.8	4.4	3.7	3.0	2.5	2.2	1.9	1.7	1.4	1.4	20.6	924.4
80,0°	8.1	5.1	3.9	3.2	2.7	2.4	2.0	1.7	1.4	1.4	1.4	12.0	936.5
82,5°	8.1	4.6	3.4	2.9	2.4	2.0	1.9	1.5	1.4	1.4	1.4	7.2	943.7
85,0°	5.9	4.1	3.0	2.5	2.2	1.9	1.7	1.5	1.4	1.4	1.4	4.6	948.3
87,5°	5.6	3.4	2.7	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	3.4	951.7
90,0°	3.0	2.7	2.5	2.4	2.0	1.9	1.7	1.4	1.4	1.4	1.0	2.8	954.4
92,5°	3.0	2.7	2.4	2.4	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.8	957.2
95,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	960.0
97,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	962.7
100,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.0	2.7	965.4
102,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.0	2.6	968.0
105,0°	3.0	2.7	2.4	2.2	1.9	1.7	1.5	1.5	1.4	1.4	1.4	2.6	970.6
107,5°	2.7	2.5	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.5	973.1
110,0°	2.9	2.7	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	1.0	2.4	975.6
112,5°	2.9	2.7	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	1.0	2.3	977.9

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.5	9.5	10.3	11.2	12.2	13.2	14.1	14.7	15.4	16.1	16.4	16.8	17.1
117,5°	8.1	9.1	10.2	10.8	11.9	12.7	13.7	14.4	14.9	15.4	15.9	16.3	16.6
120,0°	8.1	9.1	9.8	10.5	11.3	12.4	13.0	13.7	14.4	14.7	15.2	15.7	15.9
122,5°	7.8	8.8	9.7	10.2	10.8	11.7	12.4	13.0	13.5	14.1	14.6	14.9	15.2
125,0°	7.6	8.5	9.3	9.8	10.3	11.0	11.9	12.4	12.9	13.4	13.7	14.1	14.2
127,5°	7.5	8.1	9.0	9.3	10.0	10.7	11.2	11.7	12.2	12.5	13.0	13.2	13.5
130,0°	7.1	7.8	8.6	9.0	9.5	10.0	10.7	11.0	11.5	11.9	12.2	12.5	12.7
132,5°	6.8	7.5	8.1	8.5	9.0	9.5	10.0	10.3	10.8	11.2	11.3	11.7	11.9
135,0°	6.3	6.9	7.6	8.0	8.3	8.8	9.3	9.7	9.8	10.2	10.5	10.8	10.8
137,5°	5.9	6.6	7.1	7.6	7.8	8.1	8.5	8.8	9.1	9.5	9.7	9.8	9.8
140,0°	5.6	6.3	6.6	6.9	7.3	7.6	7.8	8.1	8.5	8.5	8.8	9.0	9.0
142,5°	5.2	5.9	6.3	6.6	6.8	6.9	7.1	7.5	7.6	7.8	8.0	8.1	8.1
145,0°	4.9	5.4	5.8	5.9	6.3	6.4	6.4	6.8	6.8	7.1	7.1	7.3	7.5
147,5°	4.7	4.9	5.2	5.4	5.8	5.8	6.1	6.1	6.4	6.4	6.4	6.8	6.8
150,0°	4.2	4.4	4.6	4.7	5.1	5.1	5.4	5.4	5.4	5.8	5.8	5.8	5.8
152,5°	3.6	3.7	4.1	4.1	4.4	4.4	4.4	4.6	4.7	4.7	4.7	4.7	4.9
155,0°	2.7	3.0	3.0	3.4	3.4	3.4	3.6	3.6	3.7	3.7	3.7	3.7	3.7
157,5°	2.0	2.0	2.4	2.4	2.4	2.4	2.5	2.4	2.5	2.7	2.7	2.7	2.7
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.2	1.4	1.4	1.4	1.4
170,0°	1.2	1.0	1.2	1.2	1.0	1.2	1.2	1.2	1.2	1.2	1.2	1.0	1.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5575EU14HP00022 + 5XA54000XBXL</b> <b>EAN: 4069025027221 + 4058352415573</b>	<b>LP number</b> <b>59426_98</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	17.4	17.6	17.9	18.1	18.3	18.3	7.3	6.1	5.1	4.6	3.9	3.6	3.2
117,5°	16.8	17.1	17.4	17.4	17.6	17.6	7.1	6.1	5.1	4.6	4.1	3.6	3.2
120,0°	16.3	16.6	16.8	16.9	16.9	16.9	7.1	6.1	5.2	4.6	4.1	3.7	3.4
122,5°	15.4	15.6	15.7	15.9	15.9	15.9	6.9	5.9	4.9	4.6	4.1	3.6	3.4
125,0°	14.6	14.9	14.9	14.9	15.1	14.9	6.8	5.9	4.9	4.6	4.1	3.7	3.4
127,5°	13.9	13.9	14.1	14.2	14.2	14.2	6.6	5.8	4.9	4.4	4.1	3.6	3.4
130,0°	12.9	12.9	13.0	13.2	13.2	13.2	6.3	5.6	4.9	4.2	3.9	3.6	3.2
132,5°	11.9	12.0	12.2	12.2	12.2	12.2	5.9	5.2	4.6	4.1	3.7	3.4	3.0
135,0°	11.0	11.2	11.2	11.2	11.2	11.2	5.8	5.1	4.6	3.9	3.7	3.2	3.0
137,5°	10.2	10.2	10.2	10.2	10.2	10.2	5.4	4.9	4.2	3.7	3.4	3.2	2.7
140,0°	9.1	9.1	9.1	9.1	9.1	9.1	5.2	4.6	4.1	3.7	3.4	2.9	2.7
142,5°	8.1	8.1	8.1	8.1	8.1	8.5	4.9	4.4	3.9	3.6	3.2	3.0	2.7
145,0°	7.5	7.5	7.5	7.5	7.5	7.5	4.7	4.2	3.9	3.6	3.2	2.9	2.5
147,5°	6.8	6.8	6.8	6.8	6.8	6.8	4.4	4.1	3.7	3.4	3.0	2.7	2.5
150,0°	5.8	5.8	5.9	5.8	5.8	5.8	3.9	3.6	3.2	3.0	2.7	2.5	2.4
152,5°	5.1	5.1	4.9	4.7	4.7	4.7	3.4	3.0	2.7	2.5	2.4	2.2	2.0
155,0°	3.7	3.7	3.7	3.7	3.7	3.7	2.7	2.4	2.4	2.0	2.0	1.7	1.7
157,5°	2.7	2.7	2.7	2.7	2.7	2.7	2.0	2.0	1.7	1.7	1.7	1.7	1.5
160,0°	1.7	1.7	1.9	1.7	1.7	1.7	1.7	1.7	1.5	1.4	1.5	1.4	1.4
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.5	1.4	1.4	1.4	1.4	1.4	1.4
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
167,5°	1.4	1.4	1.2	1.0	1.2	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4
170,0°	1.4	1.0	1.2	1.4	1.2	1.0	1.2	1.2	1.2	1.2	1.4	1.4	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.3	980.2
117,5°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.4	1.4	1.4	2.2	982.3
120,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.7	1.4	1.4	1.4	2.1	984.4
122,5°	3.0	2.7	2.4	2.2	2.0	1.7	1.7	1.5	1.4	1.4	1.4	1.9	986.3
125,0°	3.0	2.7	2.4	2.4	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.8	988.1
127,5°	3.0	2.7	2.4	2.2	2.0	1.9	1.7	1.5	1.5	1.4	1.4	1.6	989.7
130,0°	2.9	2.5	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.5	991.2
132,5°	2.7	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.4	992.6
135,0°	2.7	2.4	2.0	2.0	1.9	1.7	1.7	1.7	1.5	1.7	1.4	1.2	993.8
137,5°	2.4	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.5	1.4	1.4	1.1	994.9
140,0°	2.4	2.0	2.0	1.7	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.0	995.9
142,5°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.5	1.4	1.4	1.4	0.8	996.7
145,0°	2.4	2.0	1.9	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	0.7	997.4
147,5°	2.2	2.0	1.7	1.7	1.7	1.7	1.4	1.4	1.5	1.4	1.4	0.6	998.1
150,0°	2.0	1.9	1.7	1.7	1.5	1.4	1.5	1.4	1.4	1.4	1.4	0.5	998.6
152,5°	1.9	1.7	1.7	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.4	999.0
155,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.3
157,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5
160,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.7
162,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.8
165,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.0	0.1	999.9
167,5°	1.4	1.4	1.4	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	999.9
170,0°	1.4	1.2	1.2	1.4	1.4	1.2	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number:</b> 5XA5575EU14HP00022 + 5XA54000XBXL <b>EAN:</b> 4069025027221 + 4058352415573	<b>LP number</b> 59426_98
---------------------------	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4660	33.5	36.0	34.8
95	241	252	4421	31.3	33.5	32.4
90	229	250	4201	29.3	31.3	30.3
85	216	248	3963	27.3	29.2	28.2
80	203	246	3724	25.4	27.1	26.2
75	190	243	3486	23.4	25.0	24.2
70	178	241	3266	21.7	23.2	22.4
65	165	238	3027	20.0	21.3	20.6
60	152	235	2789	18.2	19.4	18.8
55	140	232	2569	16.7	17.7	17.2
50	127	229	2330	15.0	16.0	15.5
45	114	225	2091	13.4	14.3	13.8
40	102	221	1871	12.0	12.7	12.4
35	89	216	1633	10.4	11.1	10.8
30	76	210	1394	8.9	9.4	9.2
25	63	203	1156	7.5	7.9	7.7
20	51	195	936	6.2	6.6	6.4
15	38	184	697	4.8	5.0	4.9
11	28	173	514	3.8	3.9	3.8