
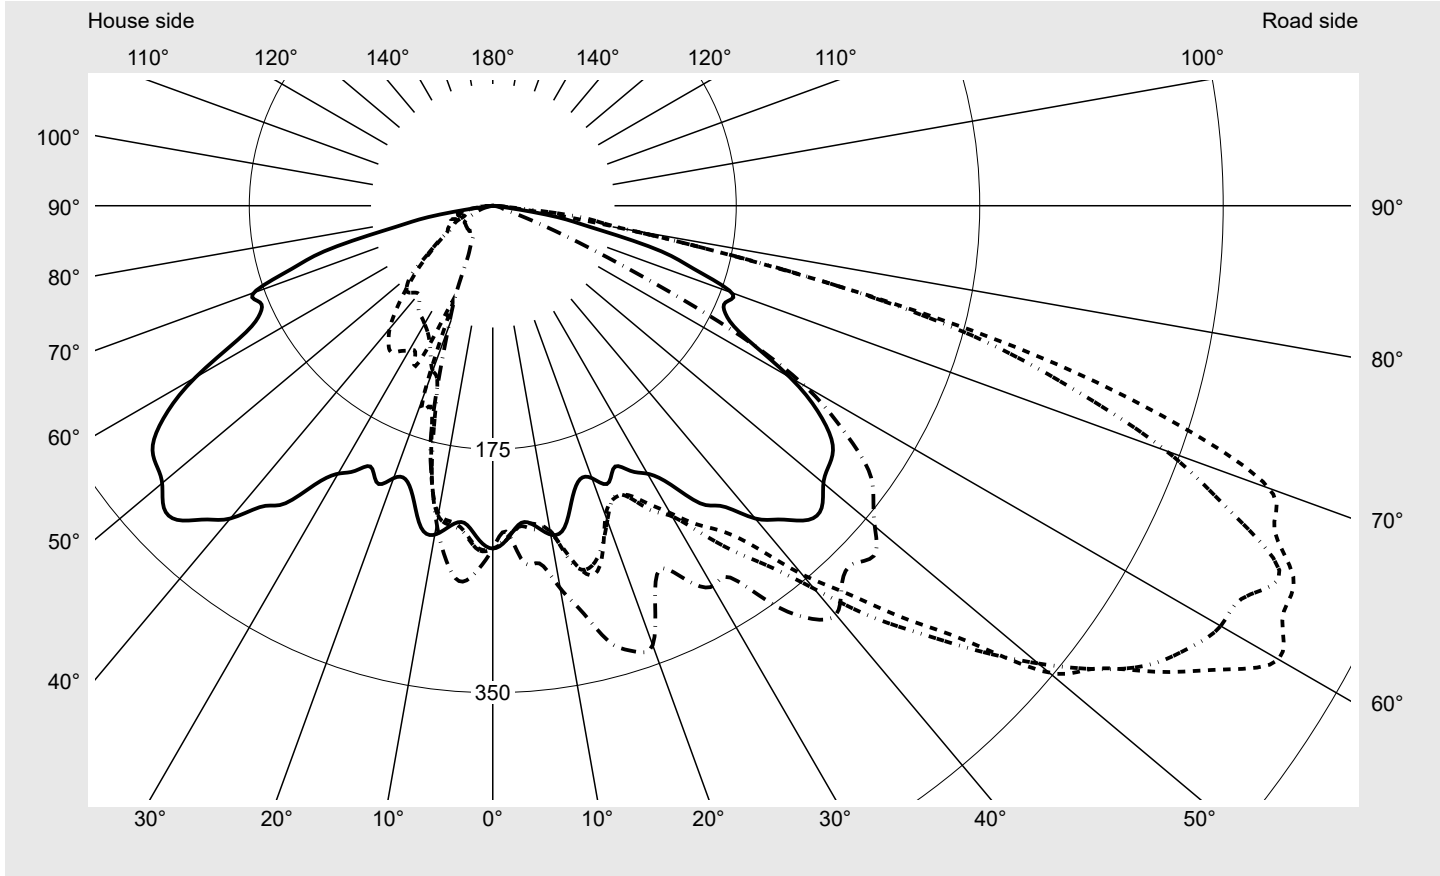


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST1.2a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Setting individual position Rated values Net luminous flux = 3710 lm Power consumption = 23.7 W Luminous efficacy = 156.5 lm/W	serial documentation 25.04.2024



Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 652 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	593.9
Imax 80°	98.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
--	--	-------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

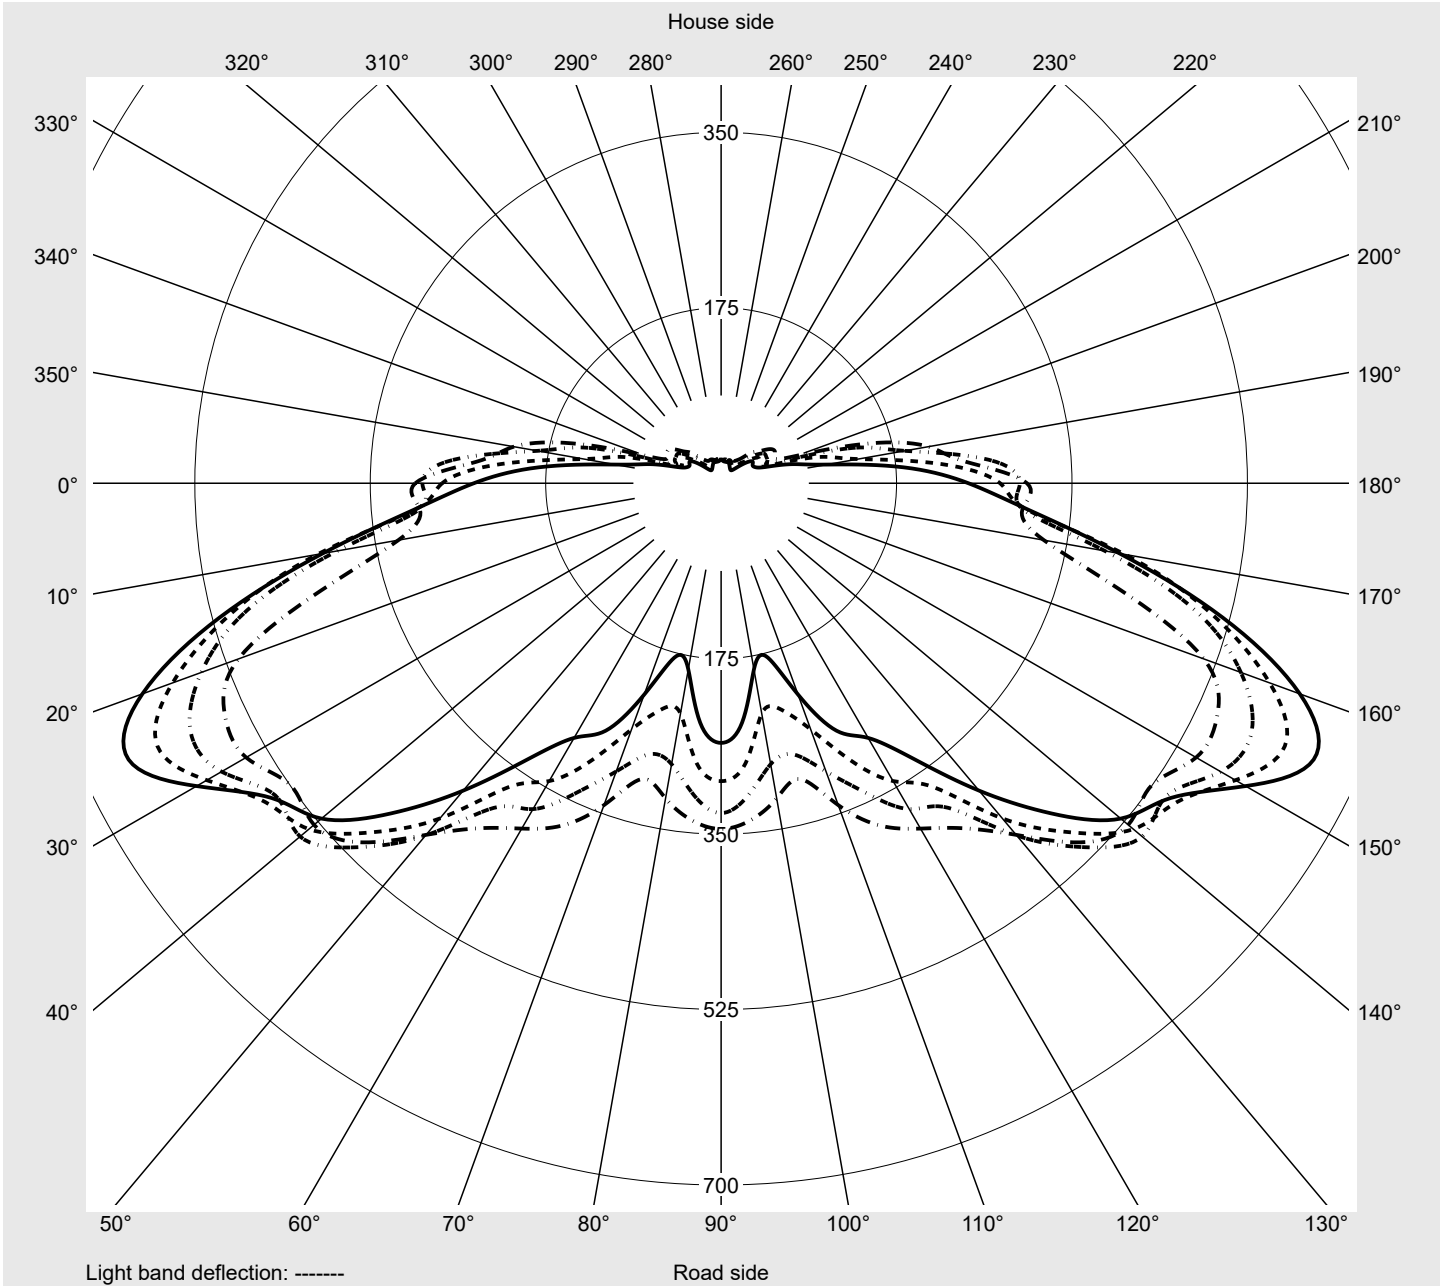

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	239.8	240.0	240.1	239.7	240.0	239.8	238.6	237.2	236.7	236.5	235.6	235.3	234.4
5,0°	229.1	228.4	228.7	229.6	230.3	230.5	231.2	232.4	235.4	238.5	239.7	241.9	242.5
7,5°	231.9	232.6	231.2	229.7	229.3	230.7	234.7	239.7	244.4	248.4	250.9	254.0	255.3
10,0°	240.0	245.5	244.0	240.9	238.8	237.8	236.9	240.2	245.1	251.2	258.7	264.9	272.0
12,5°	237.3	248.6	259.0	262.1	260.8	259.9	262.9	262.2	260.3	267.2	276.2	282.6	282.7
15,0°	219.3	225.4	240.1	256.9	269.9	275.0	269.3	265.6	263.3	261.3	264.6	271.9	281.1
17,5°	206.8	214.9	231.6	247.1	254.2	262.3	258.8	252.0	246.2	242.9	244.5	247.3	257.3
20,0°	208.4	221.3	226.4	230.6	233.9	237.1	240.8	248.5	251.5	245.3	240.1	242.0	254.3
22,5°	216.1	219.3	220.3	223.1	226.9	227.7	227.1	227.7	235.4	240.6	242.8	248.2	253.0
25,0°	207.1	214.4	224.2	232.5	232.6	229.4	231.1	234.6	239.8	243.8	257.3	260.7	268.7
27,5°	215.0	225.1	225.5	231.9	237.3	241.3	246.8	251.6	257.6	266.8	281.0	288.8	303.3
30,0°	222.4	233.4	237.1	242.8	250.8	255.0	257.8	266.5	281.3	295.2	308.3	320.8	334.8
32,5°	237.4	244.8	245.8	249.4	262.0	271.1	279.1	290.5	312.4	328.5	340.2	345.4	356.7
35,0°	261.6	267.3	267.7	267.3	274.5	285.1	303.6	321.6	334.8	353.0	362.6	378.3	388.1
37,5°	272.5	277.6	279.9	285.7	293.6	308.5	326.9	345.0	359.7	372.7	387.7	420.5	413.3
40,0°	293.4	297.1	299.4	309.9	319.5	345.9	359.3	367.5	382.1	408.4	414.9	433.9	441.4
42,5°	305.8	310.7	318.2	336.2	353.8	378.6	399.4	400.4	400.5	427.8	436.5	449.4	450.6
45,0°	319.6	313.1	321.5	373.8	392.3	420.0	434.8	431.2	434.8	457.0	452.4	447.1	446.6
47,5°	320.8	309.8	325.1	385.4	419.7	463.8	473.6	464.3	469.8	469.4	456.5	443.9	445.2
50,0°	310.2	307.2	315.4	392.2	452.4	522.3	511.8	491.4	505.3	487.1	454.1	435.2	423.2
52,5°	305.1	301.6	326.9	413.0	512.4	546.3	547.1	524.7	530.1	506.6	457.9	420.1	397.8
55,0°	298.1	302.5	388.7	489.5	551.8	584.1	575.4	542.9	548.3	513.5	458.7	395.3	375.4
57,5°	278.3	306.9	409.1	507.8	582.3	620.5	592.4	554.8	536.8	492.4	436.5	370.2	343.0
60,0°	246.7	308.6	403.8	518.1	614.4	652.2	604.1	547.4	520.4	465.8	400.3	336.1	293.3
62,5°	203.8	309.3	401.4	514.5	592.8	640.0	609.1	568.3	505.6	448.4	370.3	308.4	244.7
65,0°	184.8	305.8	399.8	491.5	545.4	635.2	624.2	536.2	477.4	421.4	336.1	290.3	208.4
67,5°	181.2	300.3	385.2	455.9	537.1	608.0	573.8	499.7	429.1	379.6	303.5	252.0	174.7
70,0°	182.8	298.3	348.6	421.3	536.1	593.9	515.4	439.2	393.7	335.0	261.7	204.6	153.3
72,5°	152.3	295.2	340.0	415.6	464.5	507.8	436.8	365.4	336.0	281.8	215.0	165.1	137.1
75,0°	123.4	244.9	296.2	319.8	343.4	381.6	351.0	272.8	224.7	206.6	172.7	145.5	127.0
77,5°	74.5	181.8	192.1	227.4	191.9	217.5	221.5	172.7	139.2	141.8	115.3	105.6	88.0
80,0°	47.1	60.2	72.3	86.8	96.2	97.8	98.2	98.9	96.2	95.3	52.2	40.0	30.9
82,5°	9.3	12.5	13.4	18.9	18.9	29.8	65.1	93.0	67.0	41.5	23.5	16.6	10.9
85,0°	3.5	3.3	3.7	4.4	5.5	7.4	9.6	16.6	11.6	10.1	9.4	7.2	6.3
87,5°	2.3	2.4	2.6	2.9	3.1	3.3	3.6	4.1	4.4	4.0	3.8	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
--	--	-------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	234.1	233.5	232.9	233.4	234.2	235.0	241.0	242.5	243.2	244.5	246.1	247.4	248.1
5,0°	244.3	246.1	247.2	250.8	255.4	257.5	231.6	232.2	232.8	232.6	234.9	236.2	234.4
7,5°	259.1	260.3	263.4	262.6	260.8	259.4	230.1	229.9	228.3	227.7	229.0	231.6	231.0
10,0°	272.7	271.8	271.6	272.6	275.4	279.2	233.5	228.8	225.7	223.4	224.7	226.2	223.3
12,5°	285.6	286.2	290.0	295.9	298.0	299.6	227.2	221.3	214.0	207.4	202.7	202.1	203.7
15,0°	282.9	288.2	301.7	314.1	320.8	324.6	210.7	201.6	193.5	182.8	169.7	162.8	156.0
17,5°	275.5	290.1	300.8	317.3	329.9	335.7	199.0	192.5	185.9	171.1	151.0	132.5	124.4
20,0°	266.9	281.0	296.7	311.8	330.4	336.1	198.2	187.6	172.6	163.2	145.4	126.2	113.8
22,5°	264.4	276.4	296.7	308.8	307.9	304.8	194.5	174.3	162.8	143.5	74.0	116.6	98.7
25,0°	273.7	286.6	295.4	294.2	295.9	287.6	195.6	169.8	156.1	135.8	121.1	107.6	89.5
27,5°	302.2	308.3	307.5	302.6	297.9	304.0	195.8	178.3	162.7	136.6	120.6	101.8	83.5
30,0°	338.0	331.1	312.4	313.6	311.7	315.9	207.9	188.4	165.9	142.2	120.1	98.1	77.8
32,5°	351.6	334.4	325.1	337.0	328.7	316.6	224.1	203.2	170.7	147.0	123.9	95.1	73.8
35,0°	381.8	364.5	359.3	364.4	357.6	348.7	254.1	231.6	188.3	154.7	127.9	92.7	72.5
37,5°	400.8	388.8	368.5	359.8	364.8	373.8	263.8	240.0	192.1	161.1	123.0	86.7	73.2
40,0°	426.7	407.3	369.0	349.1	366.6	383.8	284.2	250.4	192.1	160.5	115.3	82.8	76.0
42,5°	445.4	405.8	374.1	350.6	367.9	371.2	294.9	249.1	189.9	153.0	103.8	84.7	76.8
45,0°	454.6	404.8	367.5	355.3	367.9	364.9	304.7	253.4	189.5	145.6	91.7	87.2	83.4
47,5°	444.2	397.0	350.0	356.6	373.5	371.9	285.3	245.8	183.2	123.3	79.8	83.2	80.6
50,0°	415.6	363.0	328.5	334.1	367.2	358.4	246.0	208.6	170.2	99.8	69.6	75.4	71.6
52,5°	377.0	341.7	305.5	319.2	337.4	344.8	245.2	210.0	153.6	79.9	59.0	62.0	59.4
55,0°	340.5	305.9	280.1	284.6	312.2	329.0	268.2	186.1	136.3	60.7	50.5	52.1	51.7
57,5°	304.7	261.3	234.1	233.3	280.3	297.2	220.2	138.9	101.2	52.2	43.1	44.3	44.4
60,0°	272.4	224.3	180.1	188.5	239.8	259.0	182.4	107.2	73.6	47.7	37.8	36.3	38.0
62,5°	220.8	167.7	135.7	140.5	177.7	194.5	144.0	86.7	60.7	46.5	36.4	32.0	31.7
65,0°	173.8	118.9	93.3	100.8	117.9	110.3	115.5	69.8	50.4	41.5	34.4	30.3	28.6
67,5°	127.0	81.4	58.3	50.3	53.2	55.8	112.4	66.9	43.1	33.6	31.4	26.8	22.4
70,0°	110.0	67.0	36.1	23.4	24.0	23.7	111.5	64.4	43.1	30.9	28.2	21.7	19.7
72,5°	95.0	38.0	20.3	11.1	10.3	9.3	90.0	56.0	44.0	38.4	31.8	23.7	19.8
75,0°	83.9	21.9	12.7	8.3	7.2	7.1	63.0	53.1	47.7	34.4	29.9	25.7	18.1
77,5°	31.9	15.2	9.0	6.5	5.7	5.5	54.2	48.4	47.2	30.9	25.1	22.1	16.2
80,0°	14.1	9.7	6.4	5.0	4.4	4.2	36.4	35.4	29.8	22.2	19.6	18.2	16.2
82,5°	9.0	6.6	4.7	3.7	3.2	3.1	9.7	11.3	14.2	14.6	15.4	11.1	10.4
85,0°	5.2	3.9	2.9	2.3	1.9	1.7	3.1	3.1	3.2	3.3	3.4	3.5	3.5
87,5°	3.0	2.2	1.5	1.2	1.0	1.0	2.2	2.0	2.0	2.0	1.9	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	0.4	0.4
2,5°	249.5	252.2	254.7	257.5	259.7	261.3	261.3	261.3	262.1	262.4	262.8	2.9	3.3
5,0°	231.6	233.6	237.0	241.2	245.2	249.9	256.6	263.5	269.0	271.4	271.0	5.8	9.1
7,5°	225.8	225.3	227.9	229.8	234.2	239.7	243.5	246.5	250.9	255.1	256.9	8.6	17.7
10,0°	214.9	206.6	211.0	211.6	215.6	218.1	225.4	229.7	234.1	233.6	232.1	11.4	29.1
12,5°	205.5	194.6	195.1	193.5	195.4	200.0	205.8	215.1	216.6	206.7	202.2	14.2	43.3
15,0°	155.4	160.1	160.7	158.6	157.5	160.9	168.0	169.1	179.2	173.9	171.9	15.8	59.1
17,5°	121.8	123.5	125.8	124.8	119.6	125.9	127.1	123.3	124.5	126.5	127.6	16.7	75.9
20,0°	106.9	108.0	108.3	102.2	91.8	85.2	85.0	83.3	89.9	94.2	93.3	17.8	93.7
22,5°	90.5	90.6	95.5	88.8	77.0	70.1	67.6	63.8	62.9	62.6	70.1	18.6	112.3
25,0°	76.4	77.8	84.5	74.0	71.7	64.2	62.0	54.8	48.0	44.9	46.3	20.3	132.7
27,5°	68.7	60.3	56.3	57.6	57.9	53.0	52.5	44.8	39.0	37.0	36.1	22.7	155.4
30,0°	65.1	58.5	54.4	51.3	46.7	43.1	39.1	38.0	34.6	31.9	30.8	25.7	181.1
32,5°	63.3	57.4	53.7	46.9	39.3	34.9	32.3	30.9	29.7	28.1	26.3	28.9	210.0
35,0°	65.2	58.8	52.1	43.5	36.9	31.4	28.3	26.5	25.1	24.5	24.1	33.2	243.2
37,5°	66.6	58.3	50.3	42.4	36.2	31.2	26.4	24.9	23.6	24.2	23.4	36.8	280.0
40,0°	70.0	59.1	50.2	41.5	33.5	27.6	25.6	24.3	24.1	24.1	23.4	40.8	320.8
42,5°	71.2	59.5	50.3	40.5	32.6	27.3	24.6	24.4	24.3	23.8	24.8	44.5	365.3
45,0°	74.6	61.9	46.1	36.6	31.9	28.1	24.6	24.3	24.1	24.3	24.5	48.0	413.3
47,5°	70.1	55.1	41.9	34.0	30.1	27.6	24.8	24.2	24.2	24.2	24.6	50.6	463.9
50,0°	58.1	48.8	38.8	31.0	29.0	26.4	25.4	24.3	24.2	24.2	24.2	51.8	515.7
52,5°	49.6	43.2	33.6	28.2	25.7	25.8	25.3	24.1	24.3	24.7	24.1	53.3	569.0
55,0°	43.5	36.5	28.4	24.7	23.3	23.8	24.6	23.5	24.2	23.6	23.7	54.9	623.9
57,5°	36.2	29.1	22.9	20.4	21.4	22.1	23.1	22.7	22.9	23.1	23.6	53.9	677.8
60,0°	31.5	22.4	17.1	16.3	17.5	19.6	21.7	21.9	21.8	22.3	23.3	52.0	729.9
62,5°	25.2	17.7	13.2	12.8	14.7	17.2	19.3	19.4	19.7	20.4	20.9	49.2	779.1
65,0°	20.3	14.6	11.5	10.5	12.0	14.7	17.0	16.9	17.5	17.0	17.7	45.9	824.9
67,5°	18.1	13.7	10.7	9.4	10.0	11.5	13.5	14.1	14.8	13.6	14.4	41.9	866.8
70,0°	16.3	12.0	9.9	8.5	8.3	9.3	10.5	11.2	11.9	11.7	11.8	38.6	905.4
72,5°	14.7	10.9	8.3	7.1	6.8	7.7	8.1	8.4	9.0	9.3	9.3	34.1	939.5
75,0°	12.7	10.3	7.2	6.0	5.6	5.9	6.2	6.5	6.5	6.5	6.7	27.2	966.6
77,5°	10.4	7.6	5.8	5.1	4.5	4.1	4.4	4.6	3.7	3.2	3.1	18.1	984.8
80,0°	10.8	6.1	4.2	3.9	3.3	3.0	2.8	2.9	2.0	1.0	0.6	9.2	994.0
82,5°	7.4	4.7	3.4	2.9	2.5	2.2	1.9	1.9	1.1	0.6	0.4	4.3	998.3
85,0°	3.4	2.6	2.3	1.9	1.8	1.4	1.0	0.9	0.7	0.4	0.4	1.2	999.4
87,5°	1.6	1.5	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2AC1Y08GE EAN: 4069025078797	LP number 58293_439
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3710	23.7	24.3	24.0
95	241	252	3520	22.4	23.1	22.8
90	229	250	3345	21.3	21.9	21.6
85	216	248	3155	20.0	20.6	20.3
80	203	246	2965	18.9	19.4	19.2
75	190	243	2775	17.7	18.2	18.0
70	178	241	2600	16.5	17.0	16.8
65	165	238	2410	15.4	15.8	15.6
60	152	235	2220	14.3	14.6	14.4
55	140	232	2045	13.1	13.5	13.3
50	127	229	1855	12.0	12.3	12.2
45	114	225	1665	10.9	11.1	11.0
40	102	221	1490	9.9	10.2	10.0
35	89	216	1300	8.8	9.0	8.9
30	76	210	1110	7.7	7.9	7.8
25	63	203	920	6.6	6.8	6.7
20	51	195	745	5.6	5.8	5.7
15	39	185	570	4.7	4.8	4.8