


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
	Version post-top or side-entry mounting Optic asymmetric, extreme wide distribution (ST1.0a) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Setting factory setting Rated values Net luminous flux = 3460 lm Power consumption = 24.9 W Luminous efficacy = 139 lm/W	serial documentation 25.04.2024
		

Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 661 cd/klm**

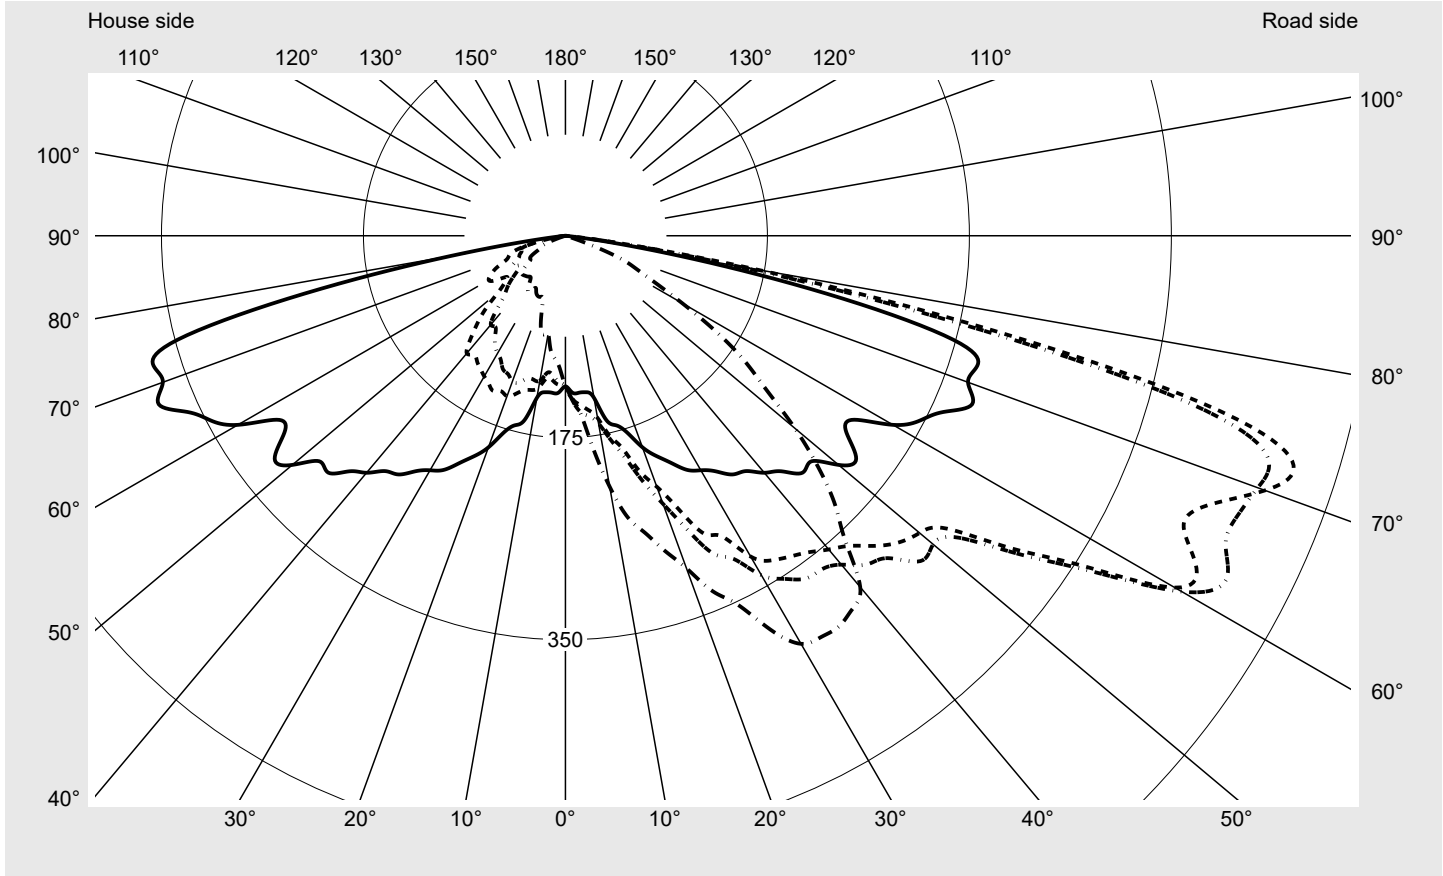

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	645.0
Imax 80°	167.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
--	--	-------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

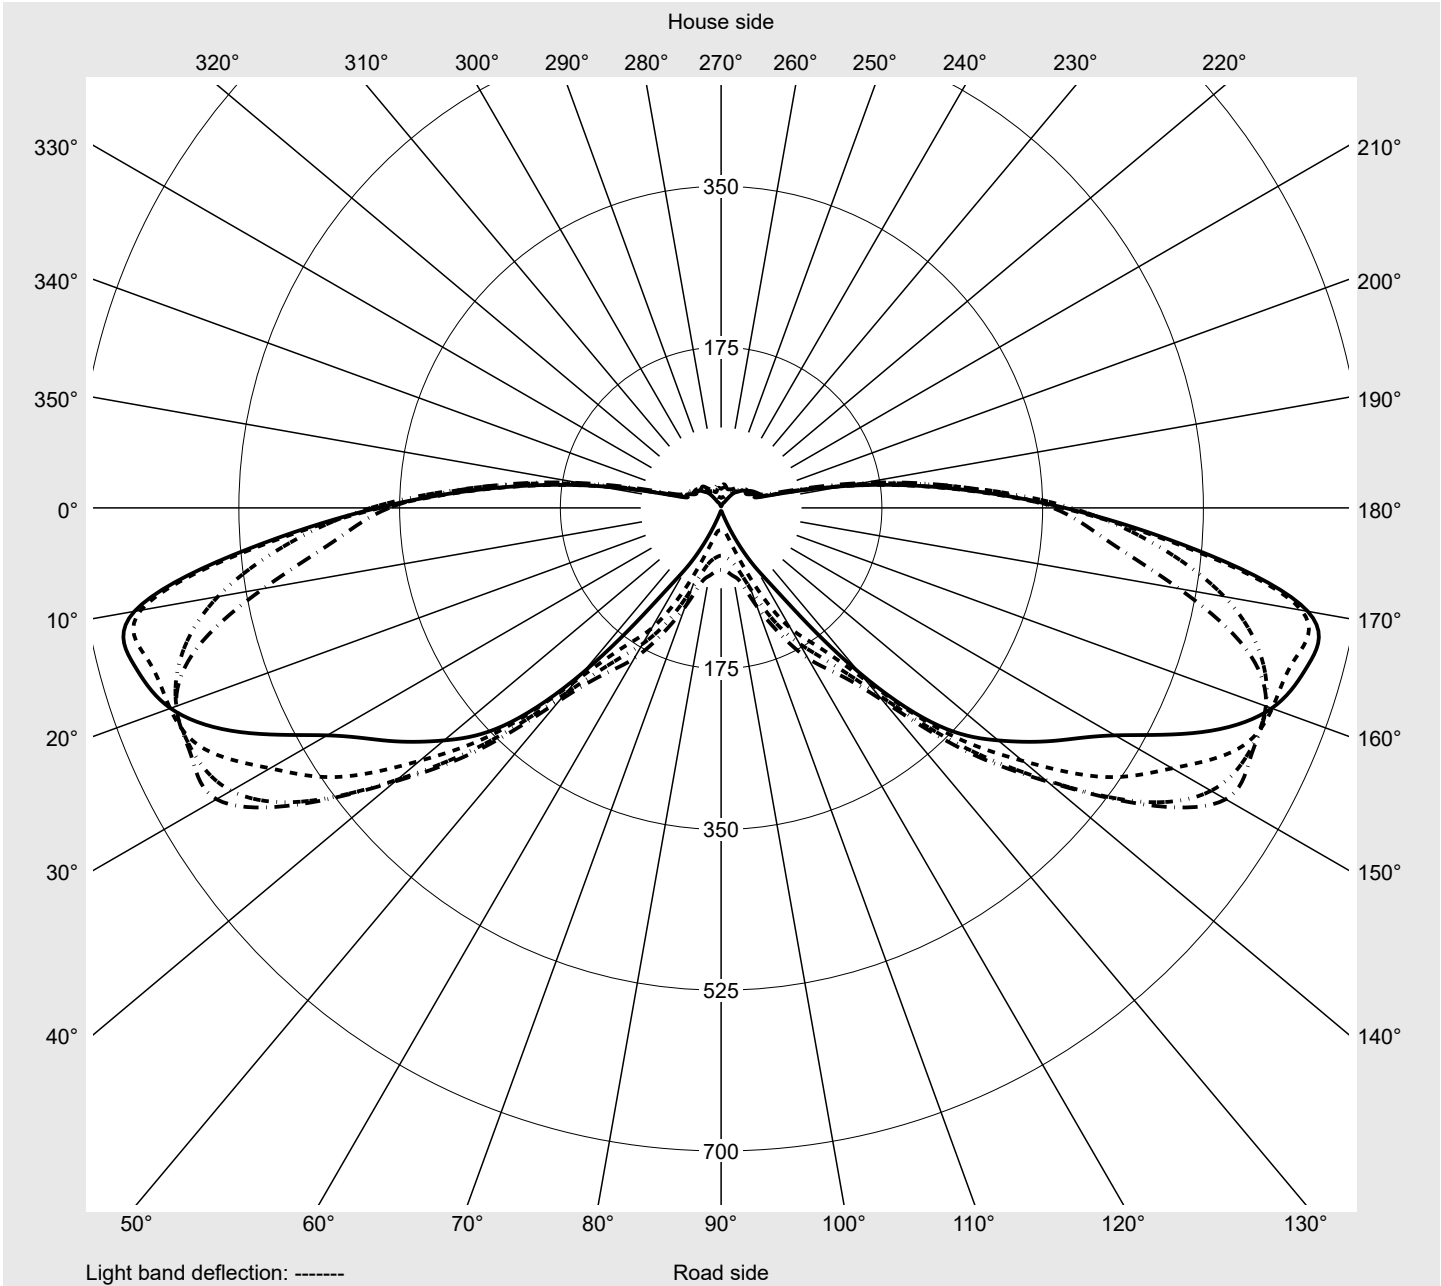

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	136.0	138.5	139.5	141.5	143.1	143.0	142.2	142.5	144.1	144.9	146.0	147.0	146.5
5,0°	136.5	139.7	143.0	147.1	153.5	155.8	154.9	157.2	159.8	161.3	162.4	161.4	159.9
7,5°	136.8	142.1	147.3	152.3	157.6	161.0	165.6	170.9	172.5	171.3	168.7	172.0	177.4
10,0°	142.6	147.8	153.0	160.3	165.1	169.3	177.3	184.1	187.2	191.2	197.2	200.3	201.5
12,5°	163.5	167.3	172.4	177.7	181.1	185.6	192.8	201.2	209.5	215.8	222.2	227.8	228.1
15,0°	170.1	176.4	184.9	190.6	198.6	206.4	211.4	221.4	229.1	235.7	249.5	253.9	257.3
17,5°	179.2	190.7	205.0	214.1	223.0	234.7	240.8	245.8	249.0	249.5	252.7	262.0	271.2
20,0°	195.1	207.0	215.2	231.4	247.2	258.6	268.3	276.9	278.8	279.9	278.5	281.6	289.1
22,5°	206.7	223.1	238.2	256.5	275.4	289.6	298.9	309.0	313.5	307.5	303.6	305.9	310.6
25,0°	217.3	238.7	261.6	285.0	304.1	321.3	330.9	339.9	339.8	328.5	325.0	328.2	331.9
27,5°	228.8	250.7	274.0	293.6	315.7	338.7	353.6	358.1	355.9	348.8	344.1	344.8	350.5
30,0°	234.6	257.8	285.1	320.9	339.6	353.2	369.3	375.8	373.0	369.3	367.3	365.9	370.3
32,5°	242.0	270.2	304.2	333.4	352.5	376.1	390.9	394.3	396.6	397.3	390.7	385.7	391.9
35,0°	252.5	278.7	309.9	339.3	362.7	383.0	387.6	394.2	399.9	400.7	399.8	396.9	399.9
37,5°	257.0	286.3	319.3	345.7	364.5	385.4	398.4	404.7	404.4	401.3	397.7	392.9	395.0
40,0°	268.1	303.0	333.2	354.8	372.0	393.7	405.0	408.1	406.8	400.0	392.0	388.4	386.3
42,5°	276.8	303.3	345.9	364.5	386.3	410.9	422.9	418.4	406.0	399.1	394.1	388.4	385.1
45,0°	290.4	314.6	356.8	380.0	395.0	419.0	427.9	425.9	414.6	410.1	393.1	372.1	367.5
47,5°	289.2	326.3	371.3	392.9	417.2	442.3	443.9	426.0	419.5	419.4	386.4	347.8	344.4
50,0°	308.9	351.5	380.8	400.6	415.9	441.5	454.5	442.7	420.7	400.5	372.2	341.7	317.5
52,5°	317.5	363.9	397.1	416.9	429.8	452.2	458.6	430.6	406.6	377.8	343.7	306.5	283.0
55,0°	297.2	367.5	434.3	472.6	481.5	479.0	482.2	456.7	420.1	362.3	306.7	278.1	254.3
57,5°	296.7	377.7	467.0	532.9	541.4	531.2	516.3	481.5	423.8	352.9	292.5	256.9	237.1
60,0°	327.7	424.7	532.9	609.7	616.7	592.2	550.6	499.9	432.9	346.5	293.2	258.0	225.8
62,5°	346.5	437.1	534.0	615.5	645.4	626.7	593.0	540.4	447.6	365.5	288.9	243.1	205.4
65,0°	361.3	424.1	506.1	591.1	631.1	636.8	634.3	563.0	463.4	371.8	274.1	220.4	189.1
67,5°	381.4	477.6	556.3	606.9	631.1	633.1	615.9	557.5	460.5	362.5	264.1	205.0	170.7
70,0°	371.2	512.4	641.5	645.0	638.4	620.8	567.0	510.7	428.4	345.5	245.1	184.7	151.5
72,5°	374.2	517.9	648.5	661.5	637.8	577.5	495.2	442.1	393.8	335.5	234.2	125.1	75.1
75,0°	347.7	473.1	561.8	587.5	559.1	469.3	379.1	352.4	316.6	217.7	99.9	32.0	9.7
77,5°	231.6	318.2	373.2	380.7	345.4	305.4	256.2	200.5	115.3	39.5	8.3	0.0	0.0
80,0°	101.0	138.7	164.6	167.3	147.4	125.6	89.2	36.7	6.9	0.0	0.0	0.0	0.0
82,5°	20.5	26.6	30.7	35.4	36.7	24.6	7.9	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	144.8	144.1	144.5	144.0	142.6	142.1	133.5	131.6	129.3	126.9	125.2	124.6	123.8
5,0°	158.2	157.8	158.6	158.1	156.5	155.6	133.0	130.2	125.9	121.7	119.4	118.0	114.8
7,5°	178.7	179.4	181.1	183.4	185.1	186.9	132.9	129.1	124.4	119.7	116.9	115.9	112.8
10,0°	205.7	209.9	211.3	215.8	220.4	220.8	140.7	137.8	133.5	127.5	121.9	117.7	111.5
12,5°	232.7	236.3	237.8	243.2	249.0	250.1	154.5	145.0	136.9	127.7	121.4	117.1	113.6
15,0°	261.2	261.9	264.6	264.9	265.0	266.5	160.7	148.9	138.6	128.1	120.8	113.7	107.5
17,5°	277.5	280.8	283.9	286.2	285.1	286.2	166.3	155.1	143.7	133.1	121.5	111.5	104.3
20,0°	298.0	303.4	307.6	308.4	304.5	306.5	178.5	161.6	148.0	134.3	118.9	109.4	102.2
22,5°	320.7	328.0	334.6	335.8	333.1	333.4	182.1	163.0	145.8	129.8	117.7	105.7	95.7
25,0°	338.4	346.6	350.8	353.0	353.2	352.4	190.0	168.2	148.2	127.8	111.4	98.7	90.7
27,5°	359.7	366.9	370.6	377.0	383.3	384.8	200.1	173.4	144.1	121.3	106.9	93.9	79.2
30,0°	375.7	381.5	390.6	401.2	407.5	408.3	205.1	174.8	140.7	117.5	99.7	85.4	71.7
32,5°	393.6	392.0	404.9	419.2	418.6	412.3	207.4	171.7	136.9	113.1	95.0	80.0	69.1
35,0°	404.5	402.8	409.9	423.8	420.5	413.2	213.2	170.1	133.3	106.3	88.2	76.3	67.6
37,5°	399.5	403.3	410.9	416.6	412.9	408.1	213.8	171.6	130.0	99.6	82.1	71.8	65.5
40,0°	386.3	392.3	396.4	395.6	396.2	397.4	217.2	175.9	133.0	100.6	81.7	68.4	61.2
42,5°	386.4	382.6	367.3	363.4	362.2	359.2	228.1	176.0	122.2	89.8	74.3	61.1	55.4
45,0°	365.8	359.0	351.7	346.0	334.0	330.8	235.4	171.4	108.4	76.4	69.0	58.8	52.0
47,5°	342.4	323.4	311.8	307.1	297.3	297.4	228.3	158.8	93.8	69.4	63.7	55.9	47.6
50,0°	302.7	287.1	278.3	268.0	258.2	259.5	230.0	147.2	75.7	63.0	57.4	50.4	44.1
52,5°	267.1	256.9	246.3	226.1	218.2	219.8	221.6	132.2	65.8	55.3	48.9	43.5	41.7
55,0°	236.1	223.9	208.7	185.6	183.8	190.1	211.1	127.7	62.2	48.9	42.9	40.1	39.1
57,5°	214.9	185.4	166.0	156.8	153.2	155.2	215.4	136.8	71.9	47.9	41.8	36.8	35.6
60,0°	190.0	155.2	132.8	126.9	120.0	116.8	227.3	144.6	76.8	52.7	46.0	38.9	36.5
62,5°	169.1	132.8	109.1	99.1	89.9	86.8	251.8	153.0	72.6	48.8	41.4	37.5	34.4
65,0°	151.1	114.6	84.7	75.2	69.3	67.5	262.0	156.1	66.1	44.4	40.7	36.8	31.7
67,5°	135.0	94.0	68.0	57.8	53.7	51.9	261.8	147.7	56.2	43.0	38.7	36.4	32.8
70,0°	105.8	62.0	38.0	27.3	24.7	24.3	246.4	137.3	52.4	40.5	36.3	34.4	34.0
72,5°	39.1	15.5	7.3	4.1	3.5	3.4	247.9	137.3	48.9	40.1	34.9	31.0	31.9
75,0°	0.8	0.0	0.0	0.0	0.0	0.0	221.1	119.2	39.4	37.2	34.1	29.4	28.2
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	144.4	78.3	25.0	25.1	25.2	20.5	15.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	62.8	34.1	12.2	12.0	10.8	6.6	2.1
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.0	6.8	2.7	2.6	1.8	0.7	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	0.2	0.2
2,5°	122.7	120.0	117.8	117.0	116.9	114.6	112.3	113.9	114.3	113.7	114.7	1.6	1.8
5,0°	111.7	109.2	107.6	107.8	107.6	106.4	106.8	106.6	106.1	106.5	106.6	3.2	5.0
7,5°	109.8	108.4	104.8	100.5	98.9	96.9	95.7	96.6	96.1	97.0	99.1	5.0	10.0
10,0°	107.0	105.7	103.6	102.1	100.6	98.1	97.2	93.4	87.9	86.3	86.3	7.1	17.1
12,5°	108.9	103.0	100.0	97.9	96.7	94.5	92.5	90.1	87.2	86.9	87.7	9.5	26.6
15,0°	102.9	98.9	93.7	89.9	86.2	83.4	81.8	80.9	80.2	81.1	82.5	12.0	38.6
17,5°	97.9	92.0	87.4	83.5	79.7	75.4	71.2	70.8	70.5	69.2	68.3	14.5	53.1
20,0°	94.0	88.2	83.8	80.3	77.8	74.4	69.6	64.6	60.5	58.6	57.5	17.5	70.6
22,5°	87.7	80.7	77.3	76.3	74.7	70.4	67.8	65.8	63.3	59.0	57.3	20.8	91.4
25,0°	82.5	75.7	71.0	69.8	66.1	61.6	60.8	59.7	57.3	56.8	57.3	24.1	115.5
27,5°	74.4	72.4	69.4	66.4	61.7	58.7	57.3	57.1	56.9	55.4	54.9	27.4	142.9
30,0°	64.9	65.9	63.6	59.1	58.8	59.6	58.4	57.0	54.2	52.0	52.1	30.7	173.6
32,5°	64.8	61.8	58.4	57.3	57.7	56.3	53.8	53.2	53.4	55.5	57.3	34.1	207.7
35,0°	62.9	58.8	54.5	54.8	56.4	52.9	48.3	48.1	53.0	56.5	56.7	36.7	244.4
37,5°	60.6	57.7	54.8	53.1	52.5	52.4	51.6	49.2	49.3	50.9	51.0	38.9	283.3
40,0°	57.8	54.5	53.2	51.0	47.8	47.5	49.6	50.7	50.8	48.8	46.9	40.9	324.2
42,5°	54.2	51.8	48.1	46.9	46.8	48.5	49.4	49.8	49.9	48.7	48.0	42.5	366.7
45,0°	52.0	50.5	45.3	46.0	48.5	46.7	50.3	53.4	49.4	48.0	49.1	44.0	410.7
47,5°	44.6	45.0	44.6	44.1	42.0	42.4	45.4	48.7	46.6	46.2	50.1	44.6	455.3
50,0°	42.7	41.3	41.0	44.4	43.6	41.8	43.7	45.3	45.4	47.0	49.3	44.9	500.3
52,5°	42.8	40.1	37.4	40.8	42.8	41.7	39.9	41.4	43.3	44.0	43.9	44.4	544.7
55,0°	39.5	36.8	37.5	39.4	39.1	38.7	37.6	37.9	37.9	37.7	37.2	44.9	589.6
57,5°	37.9	36.2	36.2	35.3	34.2	35.0	34.5	34.9	36.1	36.4	36.3	46.4	636.0
60,0°	36.1	36.7	35.0	31.8	29.8	29.4	31.0	31.5	31.8	32.4	33.0	49.2	685.2
62,5°	31.2	33.6	34.9	30.3	27.4	26.1	26.3	27.8	28.2	27.2	26.2	50.5	735.7
65,0°	29.9	30.4	30.5	26.2	23.6	22.4	21.6	22.8	25.2	25.6	24.1	50.4	786.1
67,5°	30.4	27.7	24.1	21.8	21.1	20.1	18.3	18.6	21.4	21.9	20.8	50.7	836.8
70,0°	32.0	26.4	22.3	18.3	17.7	16.6	13.9	12.3	12.1	11.4	10.9	49.4	886.2
72,5°	29.0	24.5	20.6	12.7	7.4	6.2	4.3	2.6	1.9	1.7	1.6	45.6	931.7
75,0°	24.1	16.9	8.6	3.1	0.8	0.2	0.0	0.0	0.0	0.0	0.0	36.5	968.3
77,5°	10.3	3.7	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	990.0
80,0°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	998.4
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2MC1F08GE EAN: 4069025076731	LP number 59453_272
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3460	24.9	25.7	25.3
95	241	252	3283	23.6	24.3	24.0
90	229	250	3119	22.4	23.1	22.8
85	216	248	2942	21.2	21.7	21.4
80	203	246	2765	19.9	20.5	20.2
75	190	243	2588	18.7	19.2	19.0
70	178	241	2425	17.5	18.0	17.8
65	165	238	2248	16.3	16.7	16.5
60	152	235	2071	15.1	15.5	15.3
55	140	232	1907	14.0	14.3	14.2
50	127	229	1730	12.8	13.1	13.0
45	114	225	1553	11.6	11.9	11.8
40	102	221	1389	10.6	10.9	10.8
35	89	216	1212	9.4	9.6	9.5
30	76	210	1035	8.2	8.4	8.3
25	63	203	858	7.1	7.3	7.2
20	51	195	695	6.1	6.2	6.2
15	38	184	518	4.9	5.0	5.0
11	29	175	395	4.0	4.1	4.0