




Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_20
	Version prismatic diffuser, opal, PMMA, extremely wide distribution, emergence lighting 3h Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 4330 lm Power consumption = 28.8 W Luminous efficacy = 150.3 lm/W	serial documentation 08.05.2024
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 335 cd/klm**

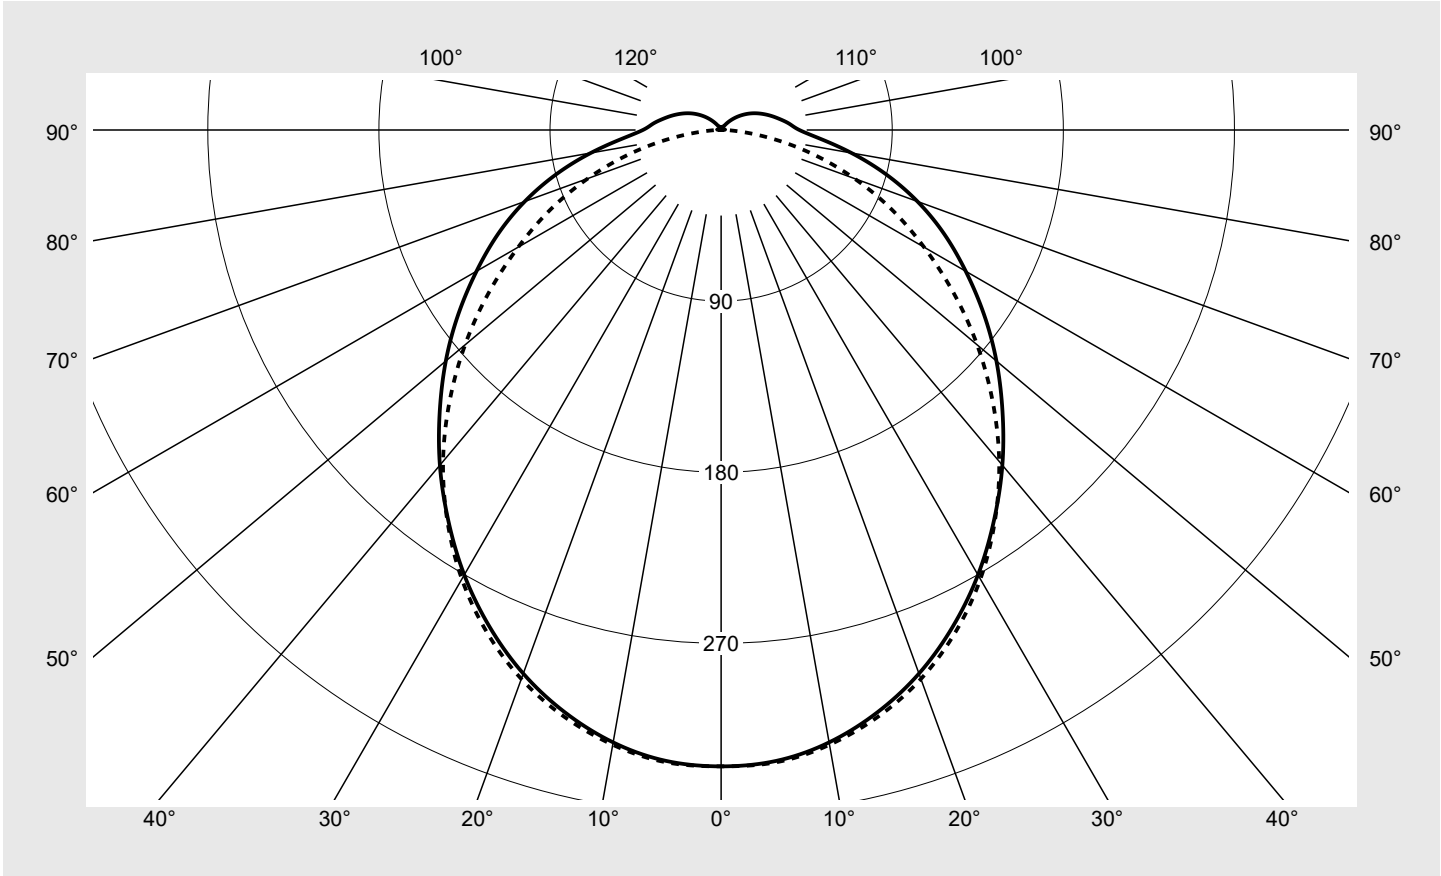

Classifications	
DIN 5040	A 4 1
CIE	N1=46 N2=76 N3=93 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	93.9%
ϕ_o	6.1%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_20
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	334.7	334.7	334.7	334.7	334.7	334.7	334.7	2.0	2.0
5°	333.1	333.6	331.1	331.9	332.7	333.2	333.8	15.9	17.9
10°	327.1	327.9	325.6	326.0	327.2	327.9	328.3	31.1	49.0
15°	317.2	318.4	316.4	316.9	317.9	318.6	319.4	45.1	94.1
20°	304.3	305.5	304.0	304.0	305.5	306.0	307.3	57.2	151.3
25°	288.3	289.5	288.3	288.0	289.4	289.8	291.5	67.0	218.3
30°	270.2	271.6	270.4	269.7	270.4	271.0	272.7	74.2	292.5
35°	250.3	251.6	250.4	249.2	249.0	249.3	251.0	78.6	371.1
40°	230.1	230.9	229.3	227.2	226.1	225.6	227.5	80.3	451.4
45°	209.3	209.8	207.4	204.4	202.0	200.5	202.0	79.4	530.9
50°	189.0	188.7	186.0	181.6	177.7	174.7	175.8	76.4	607.2
55°	168.7	168.2	164.8	159.1	153.5	149.2	149.2	71.4	678.6
60°	148.6	147.7	143.7	136.7	130.2	124.3	123.2	64.8	743.4
65°	129.5	127.8	123.0	114.9	108.3	100.8	99.1	57.1	800.4
70°	109.9	108.0	102.2	93.4	85.8	77.4	74.6	48.0	848.4
75°	89.7	87.9	81.7	72.5	63.8	55.3	51.1	38.1	886.5
80°	69.6	67.6	61.9	52.4	43.1	34.0	28.9	27.7	914.2
85°	52.2	49.9	44.6	35.4	25.7	16.3	10.6	18.5	932.7
90°	41.2	39.2	34.0	25.7	16.3	7.4	2.3	13.2	945.9
95°	36.2	34.5	30.1	22.6	13.9	5.6	2.0	11.4	957.3
100°	31.8	30.4	26.2	19.4	11.5	4.0	1.7	9.7	967.1
105°	27.9	26.5	22.5	16.5	9.2	2.5	1.5	8.1	975.2
110°	24.2	22.6	19.2	13.5	6.9	1.5	1.3	6.6	981.8
115°	20.8	19.1	16.0	10.8	4.9	1.4	1.2	5.2	987.0
120°	17.3	15.9	12.9	8.1	3.1	1.3	1.2	4.0	991.0
125°	13.9	12.5	9.8	5.6	1.6	1.3	1.1	2.9	993.8
130°	10.5	9.4	7.0	3.5	1.5	1.3	1.1	2.0	995.8
135°	7.3	6.4	4.4	1.9	1.5	1.2	1.0	1.3	997.1
140°	4.5	3.8	2.3	1.7	1.5	1.2	1.1	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.4	0.4	999.3
160°	1.8	1.8	1.7	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_20
-----------------------------	------------------------------------------------------------------	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.5	20.1	21.8	22.1	19.6	21.3	19.9	21.6	21.9
	3H	21.6	23.1	21.9	23.4	23.8	21.0	22.6	21.4	22.9	23.3
	4H	22.4	23.9	22.8	24.2	24.6	21.6	23.1	22.0	23.4	23.8
	6H	23.1	24.5	23.6	24.9	25.3	22.0	23.4	22.4	23.8	24.1
	8H	23.5	24.8	23.9	25.1	25.5	22.2	23.4	22.6	23.8	24.2
	12H	23.8	25.0	24.2	25.4	25.8	22.2	23.4	22.6	23.8	24.2
4H	2H	20.5	21.9	20.8	22.3	22.6	20.3	21.8	20.7	22.1	22.5
	3H	22.5	23.7	22.9	24.1	24.5	22.0	23.2	22.4	23.6	24.0
	4H	23.4	24.6	23.9	25.0	25.4	22.7	23.8	23.1	24.2	24.7
	6H	24.3	25.4	24.8	25.8	26.2	23.2	24.2	23.6	24.6	25.1
	8H	24.8	25.7	25.2	26.1	26.6	23.3	24.3	23.8	24.7	25.2
	12H	25.2	26.0	25.6	26.4	26.9	23.5	24.3	23.9	24.7	25.2
8H	4H	23.8	24.7	24.2	25.1	25.6	23.1	24.0	23.6	24.5	24.9
	6H	24.8	25.6	25.3	26.1	26.6	23.8	24.5	24.3	25.0	25.5
	8H	25.4	26.1	25.9	26.5	27.1	24.0	24.7	24.5	25.2	25.7
	12H	25.9	26.5	26.4	27.0	27.5	24.2	24.8	24.7	25.2	25.8
12H	4H	23.8	24.7	24.3	25.1	25.6	23.2	24.0	23.7	24.5	25.0
	6H	24.9	25.6	25.4	26.1	26.6	23.9	24.6	24.4	25.1	25.6
	8H	25.5	26.1	26.0	26.6	27.1	24.2	24.8	24.7	25.3	25.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1299	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		9136.0	9186.6	9235.2	9367.1	9645.2	10077.9	10772.3	
50°		8750.4	8768.5	8807.0	8895.6	9129.5	9526.6	10281.2	
55°		8379.2	8393.6	8400.8	8434.1	8598.1	8968.8	9741.5	
60°		8028.0	8020.5	7999.7	7964.8	8091.8	8387.5	9185.3	
65°		7734.8	7680.4	7610.0	7488.1	7614.7	7829.5	8682.0	
70°		7402.0	7322.1	7167.5	6971.4	7012.0	7135.3	8004.1	
75°		6982.7	6897.2	6679.5	6389.1	6288.6	6339.9	7136.8	
80°		6485.7	6362.2	6117.4	5685.6	5391.5	5192.8	5840.6	
85°		6102.4	5910.1	5634.9	5044.4	4452.6	3785.7	3946.4	

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_20
------------------------------------	------------------------------------------------------------------	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

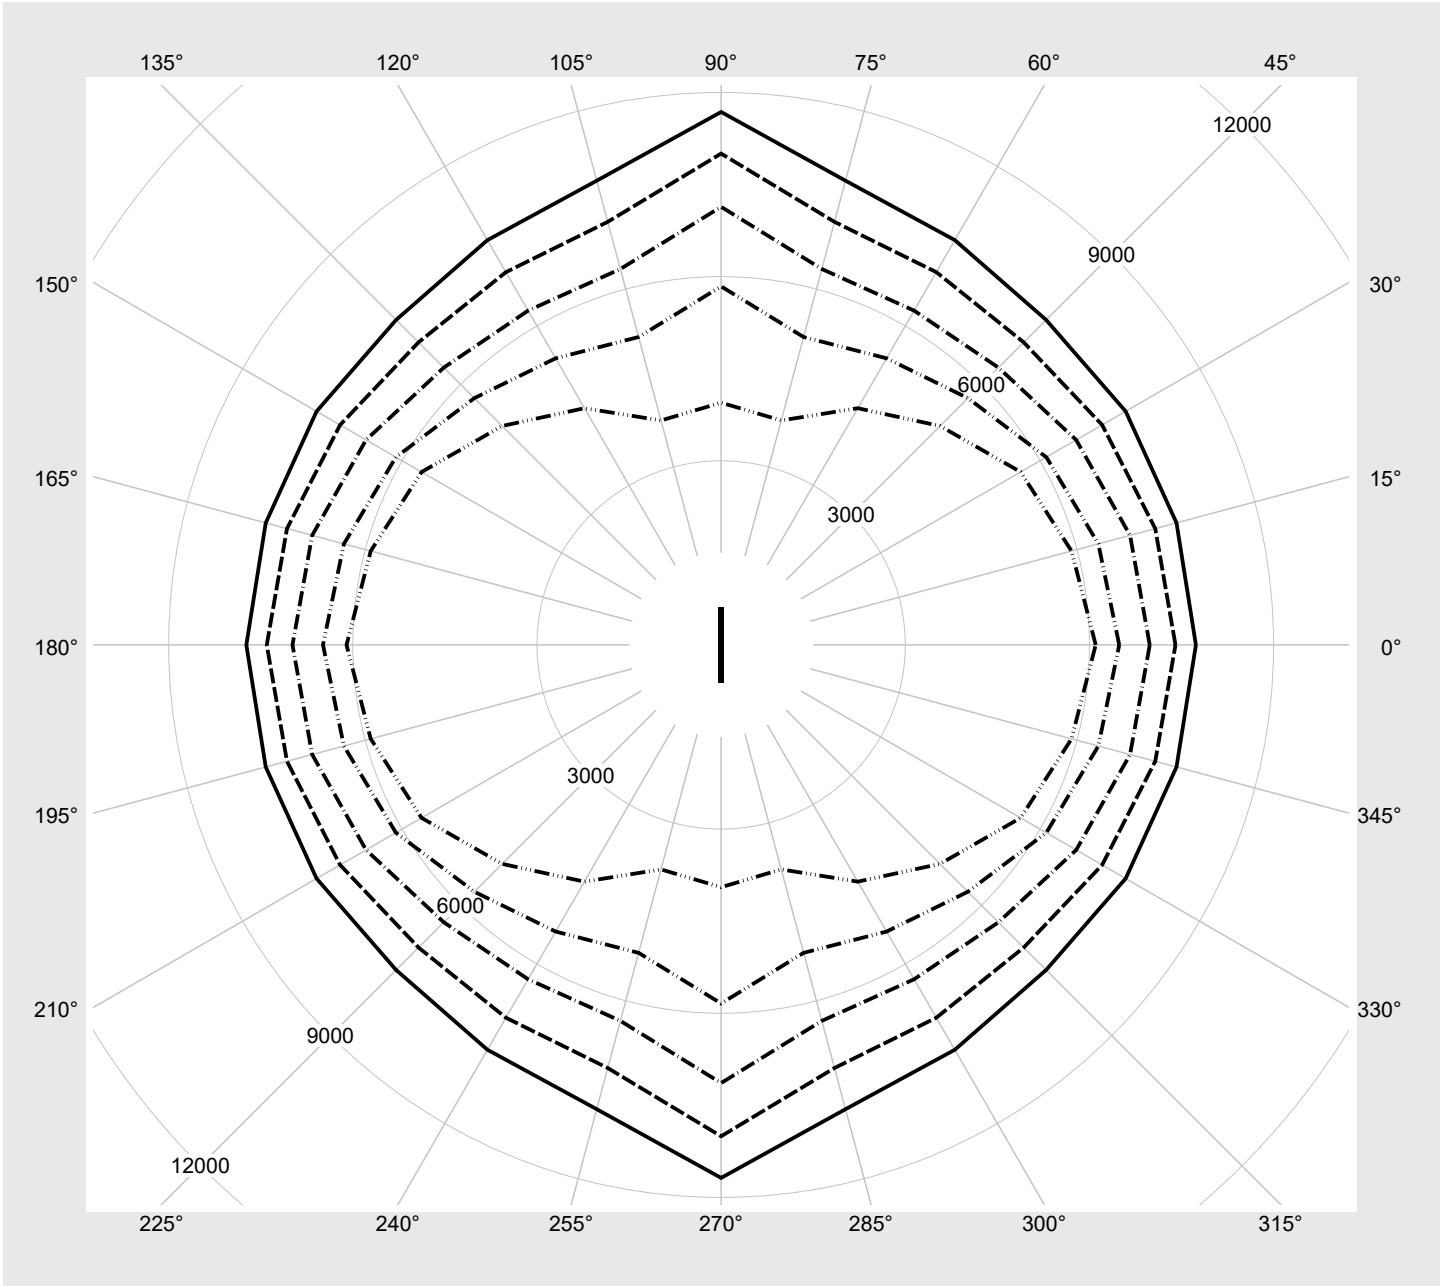

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_20
------------------------------------	------------------------------------------------------------------	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	4330	28.8
95	241	4116	27.7
90	228	3901	26.4
85	215	3686	25.2
80	202	3471	24.0
75	189	3253	22.8
70	176	3034	21.6
65	163	2814	20.5
60	150	2593	19.4
55	138	2388	18.4
50	125	2166	17.4
45	112	1943	16.3
40	100	1735	15.3
35	87	1510	14.2
30	75	1302	13.0
25	62	1076	11.8
20	50	866	10.7
15	38	655	9.3
10	25	427	7.7
5	13	215	6.0
2	5	74	4.7