


Photometric test report

Family Monsun® 21	Order number: 51FB207L447K3G EAN: 4069025131683	LP number 59394_22
	Version prismatic diffuser, opal, polycarbonate, extremely wide distribution, emergence lighting 3h	serial documentation 08.05.2024
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 4320 lm Power consumption = 31.3 W Luminous efficacy = 138 lm/W	

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 318 cd/klm**

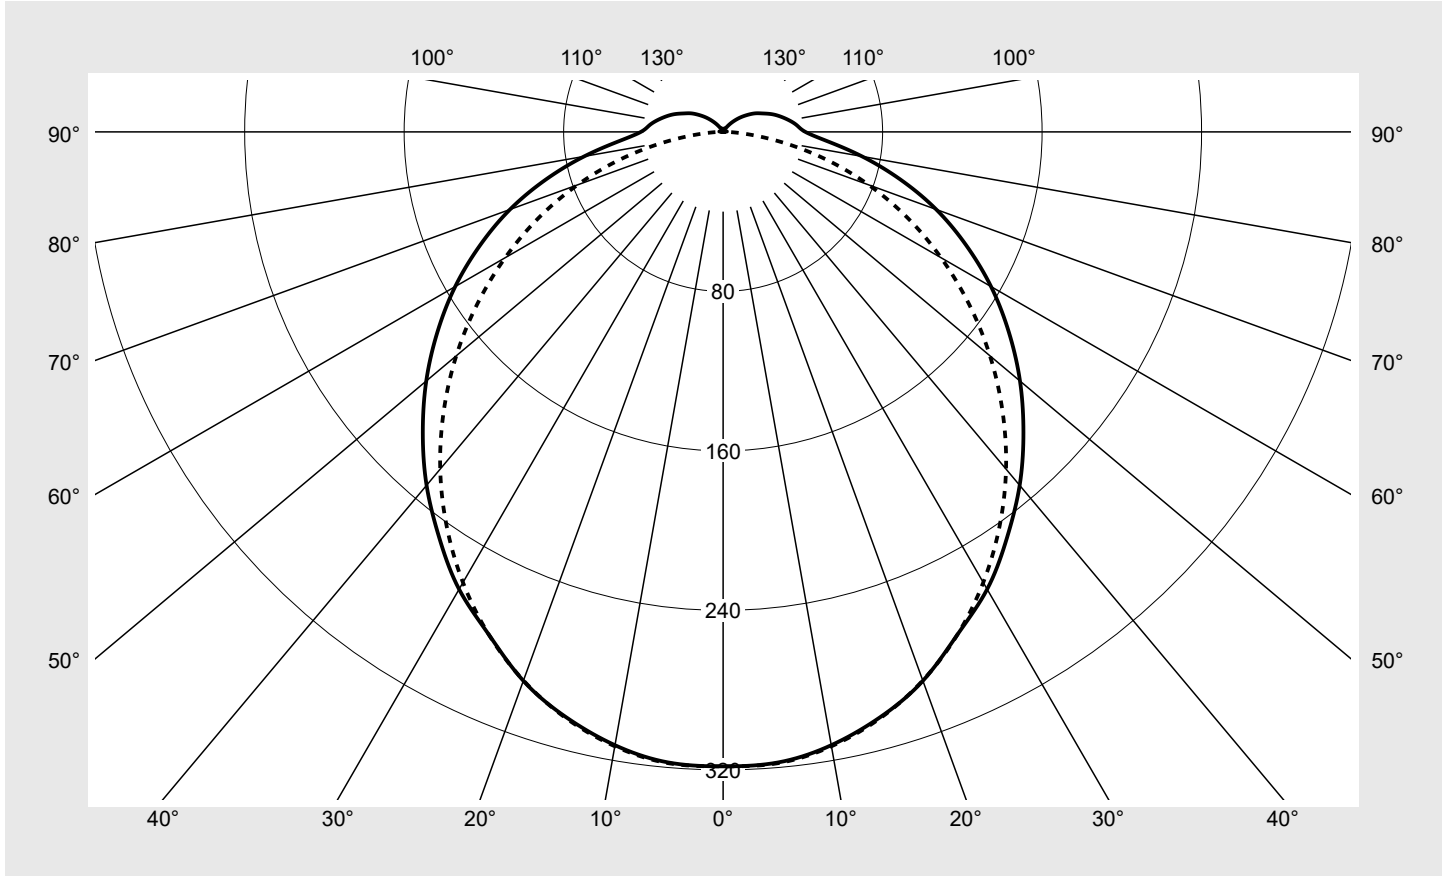

Classifications	
DIN 5040	A 4 1
CIE	N1=45 N2=75 N3=93 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	93.7%
ϕ_o	6.3%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB207L447K3G EAN: 4069025131683	LP number 59394_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	318.2	318.2	318.2	318.2	318.2	318.2	318.2	1.9	1.9
5°	317.5	317.5	315.1	315.9	316.6	317.2	317.8	15.1	17.0
10°	312.4	312.6	310.3	310.8	311.5	312.2	312.9	29.7	46.7
15°	304.0	304.5	302.1	302.5	303.1	303.6	304.5	43.0	89.7
20°	293.0	293.3	291.0	291.0	291.4	291.9	292.8	54.7	144.5
25°	278.2	280.0	277.5	276.9	276.9	277.3	278.2	64.3	208.8
30°	264.9	265.0	262.4	260.7	260.0	260.0	261.0	71.8	280.6
35°	248.3	248.5	245.7	243.1	241.2	240.6	241.7	76.7	357.3
40°	231.4	230.9	227.8	224.4	221.2	219.7	220.8	79.3	436.6
45°	213.0	212.5	208.9	204.3	200.0	197.3	198.2	79.4	515.9
50°	194.4	193.4	189.5	184.3	178.4	174.4	174.7	77.3	593.2
55°	174.9	174.0	169.9	163.6	156.5	151.3	150.6	73.2	666.4
60°	155.2	153.6	149.3	142.2	134.7	128.1	126.2	67.1	733.5
65°	134.5	133.3	127.9	120.6	112.6	105.3	102.1	59.5	793.0
70°	113.8	111.2	106.2	98.6	90.1	81.8	77.7	50.1	843.1
75°	91.9	90.6	84.2	76.2	67.3	58.7	53.5	39.7	882.8
80°	70.8	68.8	62.9	54.4	45.2	36.1	30.1	28.6	911.4
85°	52.2	50.3	44.7	36.3	26.8	17.6	11.2	18.9	930.2
90°	41.3	39.2	33.7	25.7	16.7	7.7	2.0	13.2	943.5
95°	37.2	35.5	30.5	23.1	14.2	5.7	1.8	11.7	955.1
100°	33.6	31.9	27.2	20.0	11.9	4.1	1.6	10.1	965.3
105°	29.8	28.2	23.6	17.2	9.5	2.6	1.4	8.5	973.8
110°	26.0	24.2	20.2	14.2	7.2	1.5	1.2	7.0	980.8
115°	21.9	20.5	16.9	11.4	5.1	1.4	1.2	5.5	986.3
120°	18.6	17.0	13.7	8.7	3.2	1.3	1.1	4.3	990.6
125°	14.8	13.4	10.4	6.0	1.7	1.3	1.1	3.1	993.6
130°	11.3	10.0	7.4	3.7	1.5	1.3	1.1	2.1	995.7
135°	7.8	6.8	4.7	1.9	1.5	1.3	1.0	1.3	997.1
140°	4.8	4.0	2.4	1.7	1.5	1.2	1.0	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.3	0.4	999.3
160°	1.8	1.8	1.8	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.6	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB207L447K3G EAN: 4069025131683	LP number 59394_22
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.9	21.7	20.3	22.0	22.3	19.6	21.4	20.0	21.7	22.0
	3H	21.8	23.3	22.1	23.7	24.0	21.2	22.8	21.6	23.1	23.5
	4H	22.6	24.1	23.0	24.4	24.8	21.8	23.3	22.2	23.6	24.0
	6H	23.3	24.7	23.7	25.1	25.5	22.2	23.6	22.6	24.0	24.4
	8H	23.7	25.0	24.1	25.3	25.7	22.4	23.7	22.8	24.1	24.5
	12H	24.0	25.2	24.4	25.6	26.0	22.4	23.7	22.9	24.1	24.5
4H	2H	20.7	22.1	21.1	22.5	22.9	20.4	21.9	20.8	22.3	22.6
	3H	22.7	24.0	23.1	24.3	24.8	22.2	23.5	22.6	23.8	24.3
	4H	23.7	24.8	24.1	25.2	25.6	22.9	24.1	23.4	24.5	24.9
	6H	24.5	25.6	25.0	26.0	26.4	23.4	24.5	23.9	24.9	25.4
	8H	24.9	25.9	25.4	26.3	26.8	23.6	24.6	24.1	25.0	25.5
	12H	25.3	26.1	25.8	26.6	27.1	23.7	24.6	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.9	23.4	24.3	23.8	24.7	25.2
	6H	25.0	25.8	25.5	26.3	26.8	24.0	24.8	24.5	25.3	25.8
	8H	25.5	26.3	26.0	26.7	27.2	24.3	25.0	24.8	25.5	26.0
	12H	26.1	26.7	26.6	27.1	27.7	24.4	25.0	24.9	25.5	26.1
12H	4H	24.0	24.9	24.5	25.4	25.8	23.5	24.3	23.9	24.7	25.2
	6H	25.1	25.8	25.6	26.3	26.8	24.2	24.9	24.7	25.4	25.9
	8H	25.7	26.3	26.2	26.8	27.3	24.5	25.1	25.0	25.6	26.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1299	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°	45°	9277.6	9284.0	9276.6	9343.4	9528.0	9891.4	10545.0	
50°	50°	8977.9	8963.1	8952.0	9003.3	9141.1	9487.4	10195.5	
55°	55°	8669.5	8659.3	8641.9	8652.8	8745.2	9070.3	9806.9	
60°	60°	8366.5	8324.3	8292.2	8261.9	8348.5	8624.7	9388.0	
65°	65°	8016.3	7990.9	7896.3	7845.1	7903.3	8155.9	8929.6	
70°	70°	7645.4	7525.7	7435.3	7346.9	7348.0	7530.0	8314.2	
75°	75°	7140.8	7097.1	6870.4	6700.9	6610.4	6713.7	7449.0	
80°	80°	6575.7	6451.3	6203.4	5888.8	5642.9	5512.5	6071.5	
85°	85°	6085.9	5943.0	5624.6	5167.8	4623.7	4068.7	4142.0	

Photometric test report

Family Monsun® 21	Order number: 51FB207L447K3G EAN: 4069025131683	LP number 59394_22
-----------------------------	--	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

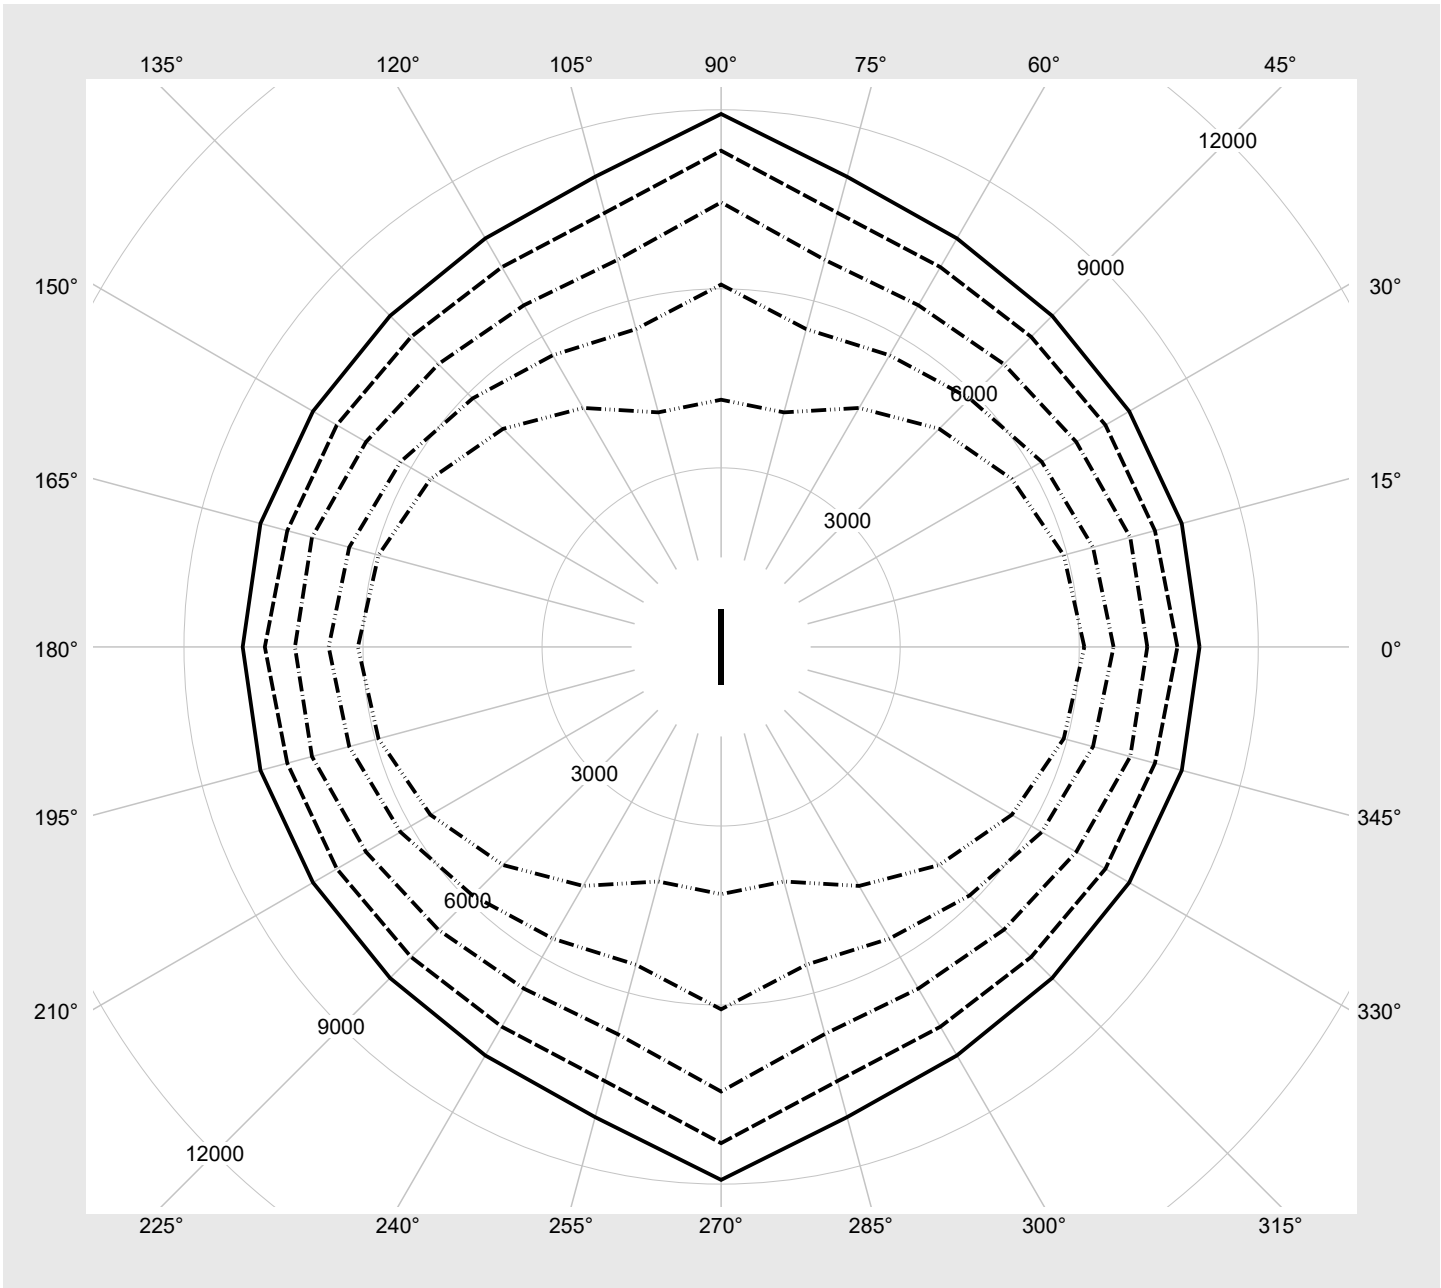

Photometric test report

Family
Monsun® 21

Order number: 51FB207L447K3G
EAN: 4069025131683

LP number
59394_22

Dimming levels table

environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	4320	31.3
95	241	4108	30.1
90	228	3893	28.7
85	215	3679	27.4
80	202	3463	26.1
75	189	3247	24.7
70	176	3031	23.3
65	163	2812	22.0
60	150	2592	20.8
55	137	2371	19.6
50	125	2166	18.5
45	112	1943	17.3
40	99	1720	16.1
35	87	1512	15.0
30	75	1304	13.8
25	62	1077	12.5
20	50	868	11.2
15	37	640	9.7
10	25	429	8.1
5	13	217	6.2
2	5	75	4.8