




Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
	Version post-top or side-entry mounting Optic asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 17750 lm Power consumption = 121.7 W Luminous efficacy = 145.8 lm/W	serial documentation 14.06.2024





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 514 cd/klm**

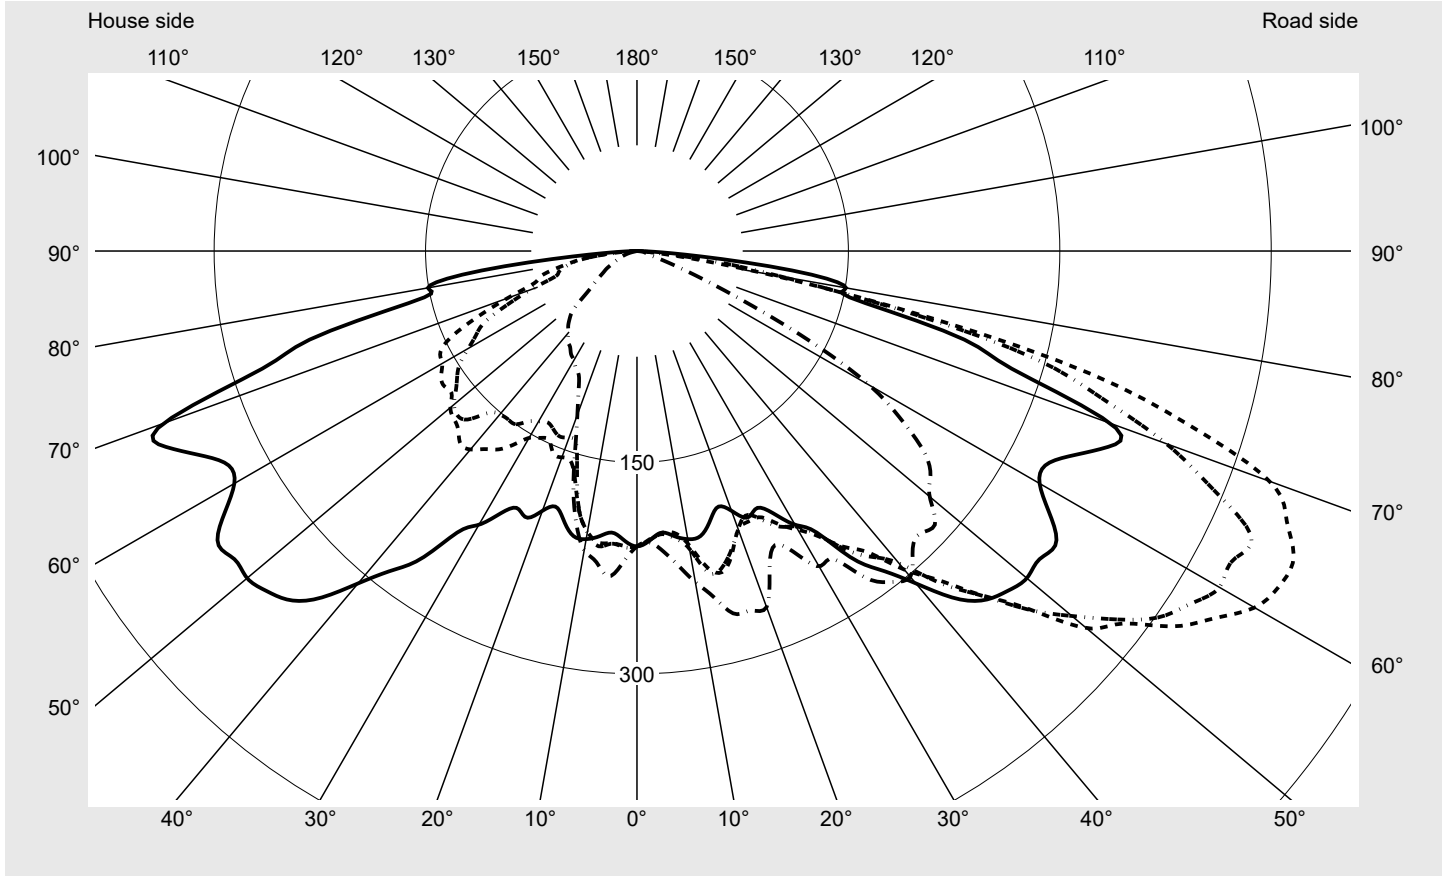


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	477.9
Imax 80°	150.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
--	--	-------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

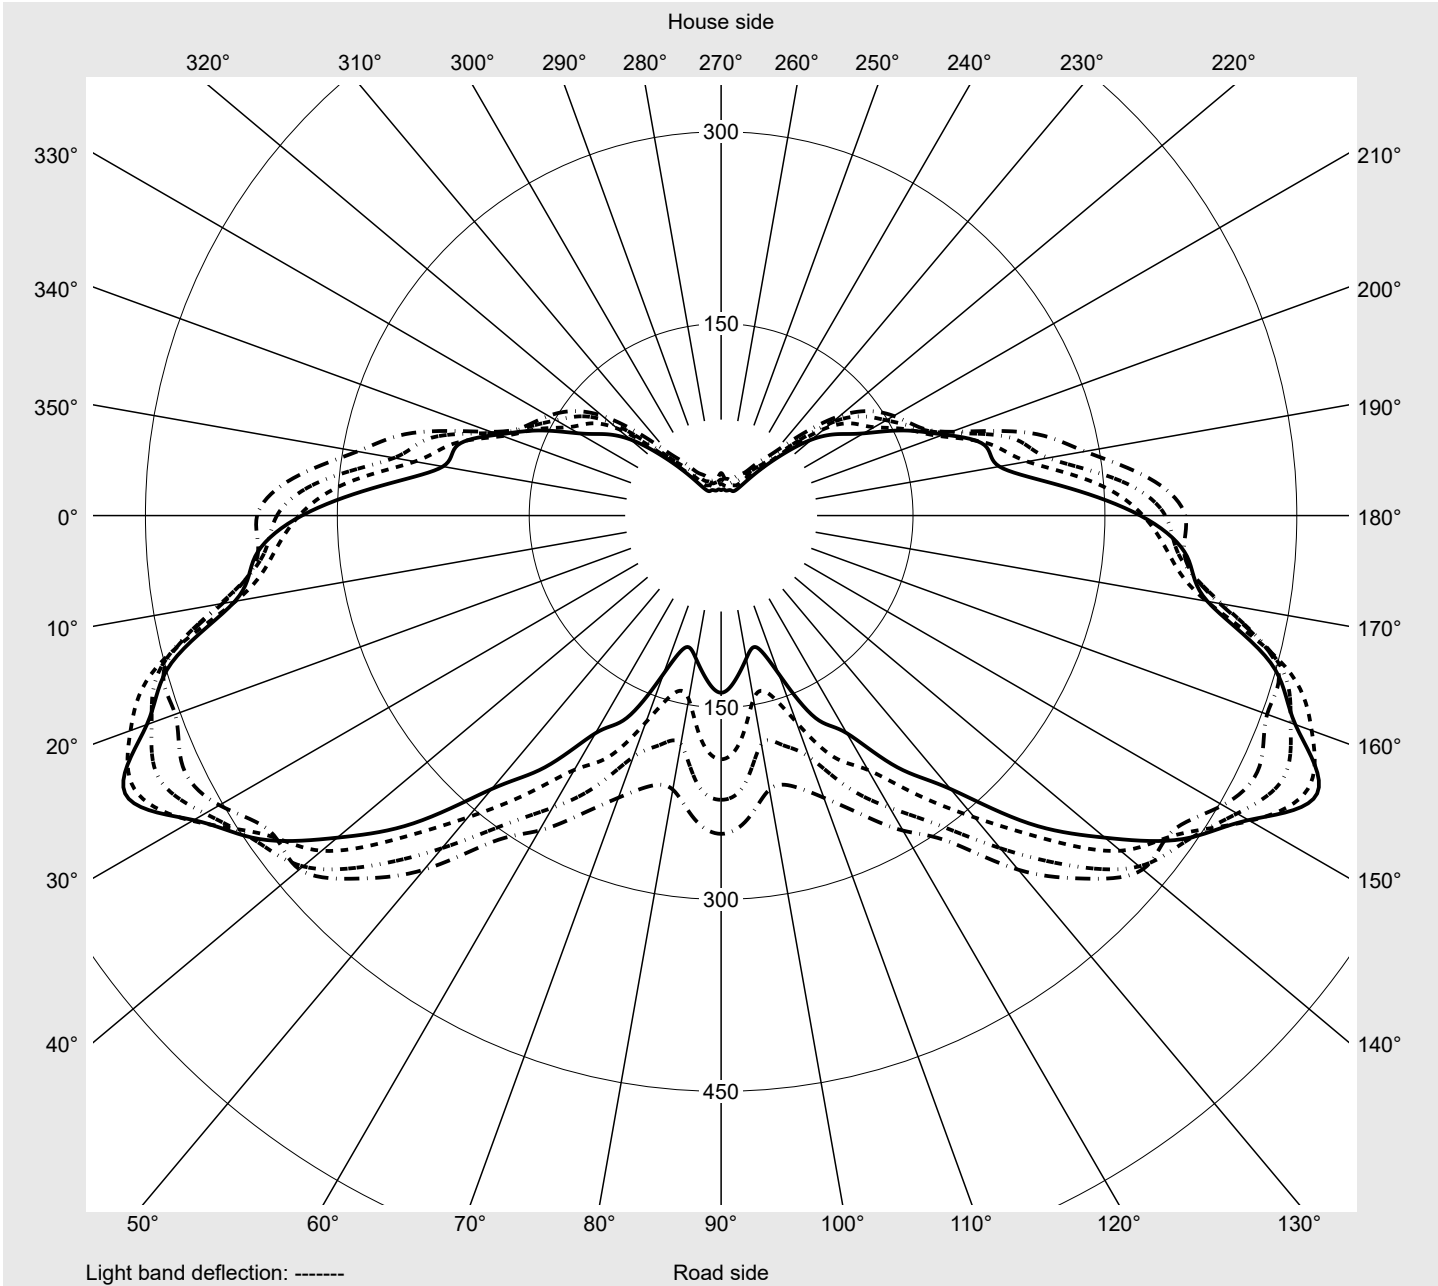

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	205.6	205.7	205.1	204.9	205.0	204.7	205.4	206.0	205.3	204.4	203.8	203.2	203.2
5,0°	200.6	200.0	200.2	201.0	201.0	200.8	201.6	203.7	204.4	207.0	208.6	208.8	209.5
7,5°	204.1	204.0	201.6	200.1	200.5	201.7	205.6	211.5	213.9	215.7	216.6	218.7	220.9
10,0°	207.6	209.2	209.7	209.8	209.4	211.5	214.5	217.2	219.6	222.1	226.6	230.1	232.8
12,5°	207.3	213.8	219.7	222.4	226.4	229.8	233.4	232.9	229.9	232.2	233.3	236.0	235.0
15,0°	199.0	200.3	211.5	229.6	237.5	235.5	232.7	228.6	224.1	226.5	229.3	229.9	235.7
17,5°	190.4	197.3	210.2	222.7	225.6	224.7	222.5	217.1	223.5	219.7	214.6	212.5	217.6
20,0°	196.1	203.0	207.3	214.6	213.8	210.1	210.1	216.7	224.8	216.2	208.8	208.6	214.3
22,5°	204.7	210.2	206.9	215.4	212.0	207.6	202.9	210.8	212.9	212.7	211.4	211.9	212.6
25,0°	201.2	207.7	211.1	218.3	214.4	208.4	210.5	217.3	217.4	220.3	221.0	220.3	222.0
27,5°	210.0	215.2	216.1	218.3	219.0	218.7	220.5	224.0	230.0	232.2	238.2	239.3	248.8
30,0°	224.2	230.6	232.5	231.7	231.8	228.4	225.6	229.7	241.6	250.9	258.1	265.1	275.3
32,5°	236.4	239.9	242.1	243.2	242.8	240.1	238.5	242.0	259.4	270.0	276.8	284.1	289.7
35,0°	266.1	266.9	261.8	256.5	252.6	256.3	258.8	263.1	271.7	283.6	290.8	306.4	310.7
37,5°	285.6	282.4	281.9	272.6	261.9	269.5	273.5	280.9	289.8	295.2	309.0	335.0	331.2
40,0°	307.8	307.6	298.3	291.3	284.3	295.0	289.2	296.4	304.1	319.2	325.8	343.3	347.7
42,5°	334.2	326.4	325.3	318.4	314.5	316.6	320.2	318.3	317.8	333.8	340.8	351.7	353.4
45,0°	349.9	346.2	344.7	343.7	341.8	345.2	345.6	339.4	342.9	358.9	350.5	347.1	349.5
47,5°	356.8	353.9	367.5	388.9	362.0	375.2	376.5	367.6	369.2	367.0	359.1	339.7	345.5
50,0°	361.1	368.7	382.5	428.7	381.0	416.2	402.8	390.6	393.2	377.3	353.6	334.3	323.6
52,5°	359.6	357.8	391.5	430.5	422.3	434.1	429.4	415.4	416.5	391.3	357.8	320.9	299.8
55,0°	362.7	363.8	395.8	449.4	454.2	464.3	452.8	430.3	430.2	401.3	361.3	311.3	284.3
57,5°	347.2	359.5	397.5	452.4	473.7	485.1	465.8	443.6	426.6	387.0	339.4	294.9	263.7
60,0°	329.9	351.7	385.3	456.5	491.3	506.0	477.3	434.9	407.6	357.1	307.9	266.0	229.6
62,5°	327.7	365.6	386.0	444.8	477.7	514.1	476.0	440.8	391.7	340.2	279.0	240.2	196.4
65,0°	342.5	392.5	389.2	425.5	456.9	514.1	481.3	416.2	364.1	317.6	257.1	222.8	161.8
67,5°	362.5	436.1	382.5	401.8	447.8	498.9	442.9	393.8	331.6	288.5	228.0	195.2	143.3
70,0°	357.4	420.3	359.9	368.3	453.9	477.9	399.8	347.8	309.6	257.3	197.9	158.9	124.3
72,5°	280.3	372.1	312.1	330.4	401.3	410.8	344.5	287.0	267.7	217.5	167.3	129.5	110.8
75,0°	237.1	318.5	240.6	282.1	301.1	327.3	288.7	220.4	187.0	164.0	134.5	116.5	98.1
77,5°	158.0	221.9	166.9	207.0	172.4	196.4	186.9	147.0	122.7	116.0	90.3	82.7	70.0
80,0°	150.6	123.0	102.1	123.8	86.4	93.9	102.8	105.1	85.9	78.7	44.1	38.5	30.3
82,5°	120.2	63.8	40.9	40.4	26.6	34.2	53.9	70.5	52.4	35.3	21.3	16.9	11.9
85,0°	49.4	23.6	13.4	9.2	7.5	9.3	11.5	16.7	14.6	10.6	10.4	8.0	6.3
87,5°	11.8	8.1	5.5	4.8	4.2	4.6	4.8	5.1	5.3	4.8	4.2	4.0	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	203.1	203.0	204.6	205.3	206.0	206.9	205.5	206.6	207.7	208.7	209.5	210.3	210.8
5,0°	209.5	210.0	210.5	212.3	214.2	213.9	201.5	202.7	202.5	204.3	208.1	208.4	207.5
7,5°	222.3	225.1	226.3	226.7	226.6	225.1	204.0	203.4	204.4	205.7	208.7	211.2	210.9
10,0°	232.0	231.2	232.4	233.6	235.5	238.6	202.7	201.4	201.3	202.7	202.3	202.6	205.2
12,5°	238.9	241.7	245.2	248.7	252.4	251.4	199.3	198.0	192.9	190.6	189.2	189.1	189.2
15,0°	236.9	243.3	249.4	258.1	262.3	266.4	194.4	191.9	184.6	178.8	169.3	164.2	160.6
17,5°	229.2	238.9	247.9	257.1	263.7	267.5	189.4	185.9	180.3	171.1	156.3	143.4	139.0
20,0°	221.0	231.2	243.0	255.2	265.6	268.8	191.0	182.0	174.2	167.5	155.8	140.7	134.8
22,5°	221.6	232.4	245.3	250.3	249.5	245.8	191.4	178.6	167.4	160.1	155.3	142.5	129.7
25,0°	228.0	237.5	241.9	238.9	237.8	230.6	192.1	174.4	168.7	155.9	147.8	139.9	126.5
27,5°	249.4	250.2	249.0	248.4	241.2	240.7	196.6	184.1	170.0	160.9	149.5	137.1	126.3
30,0°	274.3	269.2	254.3	256.1	254.8	258.3	216.4	204.4	186.6	170.7	153.1	139.5	127.1
32,5°	284.4	271.3	265.0	270.9	265.3	259.0	230.9	220.2	200.6	179.6	162.9	143.3	130.1
35,0°	305.2	293.7	290.6	292.2	285.6	283.0	265.8	250.6	220.5	193.1	171.9	150.0	132.3
37,5°	319.7	309.7	294.0	286.7	287.8	296.0	285.3	272.2	235.5	205.4	177.1	150.4	133.1
40,0°	337.7	321.9	291.1	275.9	284.7	301.7	313.3	292.7	247.2	217.3	183.8	151.3	139.1
42,5°	348.9	316.1	291.3	275.9	286.3	289.4	326.8	308.0	255.6	226.7	185.4	155.6	143.3
45,0°	352.6	315.7	285.9	274.4	284.0	283.7	347.3	328.5	269.4	236.2	179.4	168.9	149.4
47,5°	346.6	306.7	270.7	272.1	287.2	286.8	361.2	325.8	276.9	229.4	176.2	172.7	157.7
50,0°	323.6	284.0	254.7	255.4	280.5	271.1	358.8	318.5	269.0	216.6	172.8	169.4	157.1
52,5°	288.6	264.3	237.6	247.2	255.4	262.4	346.6	305.4	258.6	200.4	165.8	161.9	149.4
55,0°	257.2	234.7	219.2	217.5	238.2	248.8	335.7	288.7	249.7	191.5	167.0	155.8	142.3
57,5°	234.4	200.7	185.7	181.4	210.8	222.2	313.1	259.6	234.8	188.7	164.8	149.0	135.2
60,0°	208.2	171.9	144.2	145.7	176.3	190.5	293.5	243.1	216.8	181.7	159.6	138.1	125.5
62,5°	174.5	131.7	106.6	113.4	128.8	138.5	266.9	220.9	213.1	185.2	157.4	128.5	111.0
65,0°	137.2	94.0	76.8	79.0	87.3	81.9	252.2	222.4	206.5	180.2	146.4	119.0	100.4
67,5°	107.2	66.9	52.5	43.4	43.5	43.9	242.0	221.7	206.9	161.7	123.0	99.6	85.2
70,0°	90.4	52.1	32.8	21.8	21.0	21.8	214.0	256.9	208.7	129.3	97.7	80.3	74.0
72,5°	76.2	30.7	18.8	12.2	11.0	10.5	204.4	243.7	153.8	99.0	76.8	61.5	58.7
75,0°	60.2	19.9	12.8	9.5	8.5	8.3	180.0	179.3	126.0	89.8	71.5	57.5	49.9
77,5°	25.1	13.9	9.2	7.5	7.0	6.6	142.6	126.0	117.7	76.6	60.8	52.4	41.5
80,0°	13.4	9.4	6.7	5.7	5.4	5.4	107.1	124.7	99.0	59.9	47.4	45.6	27.2
82,5°	8.6	6.4	4.8	4.1	4.1	4.3	61.7	98.1	69.3	43.9	35.9	33.0	21.7
85,0°	5.2	4.0	3.0	2.6	2.2	2.2	35.4	45.5	27.0	19.3	18.2	15.9	11.8
87,5°	2.9	2.2	1.6	1.3	1.0	1.0	11.6	11.8	8.3	5.6	5.7	5.8	3.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	0.3	0.3
2,5°	212.0	213.1	214.4	216.5	219.1	220.0	220.3	220.4	221.1	221.3	220.8	2.5	2.8
5,0°	207.3	208.6	210.0	212.4	215.2	220.1	224.3	228.1	230.5	232.3	231.7	5.0	7.8
7,5°	207.1	207.6	207.9	208.0	210.6	214.3	217.8	219.4	220.6	222.9	222.3	7.6	15.4
10,0°	201.9	197.4	196.1	197.8	200.7	203.1	205.8	209.1	213.9	215.2	215.6	10.1	25.6
12,5°	188.7	186.8	187.2	188.9	189.0	192.0	194.9	202.2	202.9	199.9	198.5	12.7	38.2
15,0°	163.2	166.1	166.8	168.0	167.6	169.0	171.8	175.5	177.6	177.5	174.3	14.5	52.7
17,5°	142.4	145.3	148.6	146.6	142.2	141.3	142.5	140.5	139.6	141.9	145.2	15.7	68.4
20,0°	132.1	133.9	136.1	131.7	126.2	120.3	118.7	117.2	119.3	123.0	123.6	17.1	85.4
22,5°	121.6	123.3	127.5	122.6	117.2	111.3	108.1	104.4	104.1	105.1	108.4	18.6	104.0
25,0°	116.4	116.4	122.3	114.9	111.8	108.8	104.8	99.9	98.0	96.3	97.5	20.4	124.4
27,5°	113.5	110.4	106.0	104.2	104.7	100.3	99.3	95.7	92.3	93.2	93.9	22.8	147.2
30,0°	118.2	110.9	106.7	103.5	94.1	91.0	88.4	87.2	88.7	89.6	89.4	25.8	173.0
32,5°	121.5	114.0	109.5	100.2	88.8	83.6	80.0	80.0	84.3	86.3	87.0	28.8	201.9
35,0°	128.0	116.1	107.5	90.6	81.0	75.6	72.2	73.3	78.1	83.0	82.8	32.7	234.6
37,5°	127.5	116.2	104.9	90.3	73.2	71.2	67.5	68.7	74.1	79.7	80.7	36.1	270.7
40,0°	131.4	114.2	99.6	87.6	68.0	64.4	63.9	66.0	70.0	75.2	75.7	39.6	310.3
42,5°	134.7	114.2	96.0	77.4	69.2	62.4	60.4	61.5	65.2	69.3	72.3	43.1	353.4
45,0°	137.7	114.0	90.2	69.6	65.6	62.2	54.8	55.1	57.7	63.4	67.4	46.5	400.0
47,5°	135.7	108.6	82.1	66.4	62.0	58.8	49.4	45.7	48.7	56.3	60.7	49.4	449.4
50,0°	128.4	106.2	77.5	63.1	56.8	52.0	46.1	38.7	40.5	45.7	47.2	51.3	500.6
52,5°	126.2	101.8	73.6	57.3	47.5	43.0	38.5	34.1	34.3	36.5	39.1	52.3	552.9
55,0°	121.3	90.9	64.3	50.8	40.1	35.5	32.1	28.8	29.1	29.6	33.2	53.2	606.0
57,5°	113.2	77.9	54.8	44.2	35.4	30.0	28.4	26.1	26.1	26.7	28.2	52.6	658.6
60,0°	105.8	72.5	47.5	38.0	29.4	26.0	25.2	23.4	23.3	23.8	24.7	51.0	709.6
62,5°	92.5	67.2	45.6	30.4	23.1	21.1	21.2	20.4	20.0	20.6	19.9	49.0	758.6
65,0°	79.4	59.7	44.2	23.4	17.5	17.2	17.8	16.9	17.4	17.0	16.6	46.9	805.5
67,5°	69.4	52.0	33.4	16.8	12.4	12.9	14.2	13.4	14.0	14.0	13.3	44.2	849.8
70,0°	61.2	45.1	26.0	12.9	9.9	9.5	10.2	10.0	10.9	11.8	11.2	41.0	890.8
72,5°	54.5	37.0	17.5	9.7	7.6	7.4	7.3	7.4	7.9	9.1	8.6	35.2	926.1
75,0°	37.2	22.5	10.7	7.7	6.2	6.0	5.5	5.7	5.5	6.1	6.1	28.7	954.8
77,5°	24.6	13.7	8.0	6.1	4.8	4.3	4.0	3.9	3.0	2.8	2.6	20.1	974.8
80,0°	17.5	8.2	5.8	4.7	3.7	3.1	2.8	2.2	1.3	0.9	0.7	13.3	988.1
82,5°	13.4	6.6	4.4	3.5	2.9	2.2	1.8	1.6	0.9	0.4	0.5	7.7	995.8
85,0°	6.1	3.6	3.0	2.3	2.0	1.6	1.0	0.8	0.6	0.3	0.3	3.1	998.9
87,5°	2.8	2.2	1.6	1.3	1.1	0.9	0.7	0.6	0.4	0.3	0.3	1.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G51F08ME EAN: 4058352559338	LP number 58294_350
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17750	121.7	129.0	125.4
95	241	252	16842	114.2	121.1	117.6
90	229	250	16003	107.5	113.9	110.7
85	216	248	15094	100.4	106.4	103.4
80	203	246	14186	93.5	99.0	96.2
75	190	243	13278	86.8	91.8	89.3
70	178	241	12439	80.7	85.5	83.1
65	165	238	11531	74.2	78.6	76.4
60	152	235	10622	67.9	71.9	69.9
55	140	232	9783	62.2	65.8	64.0
50	127	229	8875	56.0	59.3	57.6
45	114	225	7967	50.0	52.9	51.4
40	102	221	7128	44.5	47.0	45.8
35	89	216	6219	38.7	40.8	39.8
30	76	210	5311	33.0	34.8	33.9
25	63	203	4403	27.4	28.8	28.1
20	51	195	3564	22.3	23.4	22.8
15	38	184	2656	16.9	17.7	17.3
13	34	180	2376	15.3	16.0	15.6