
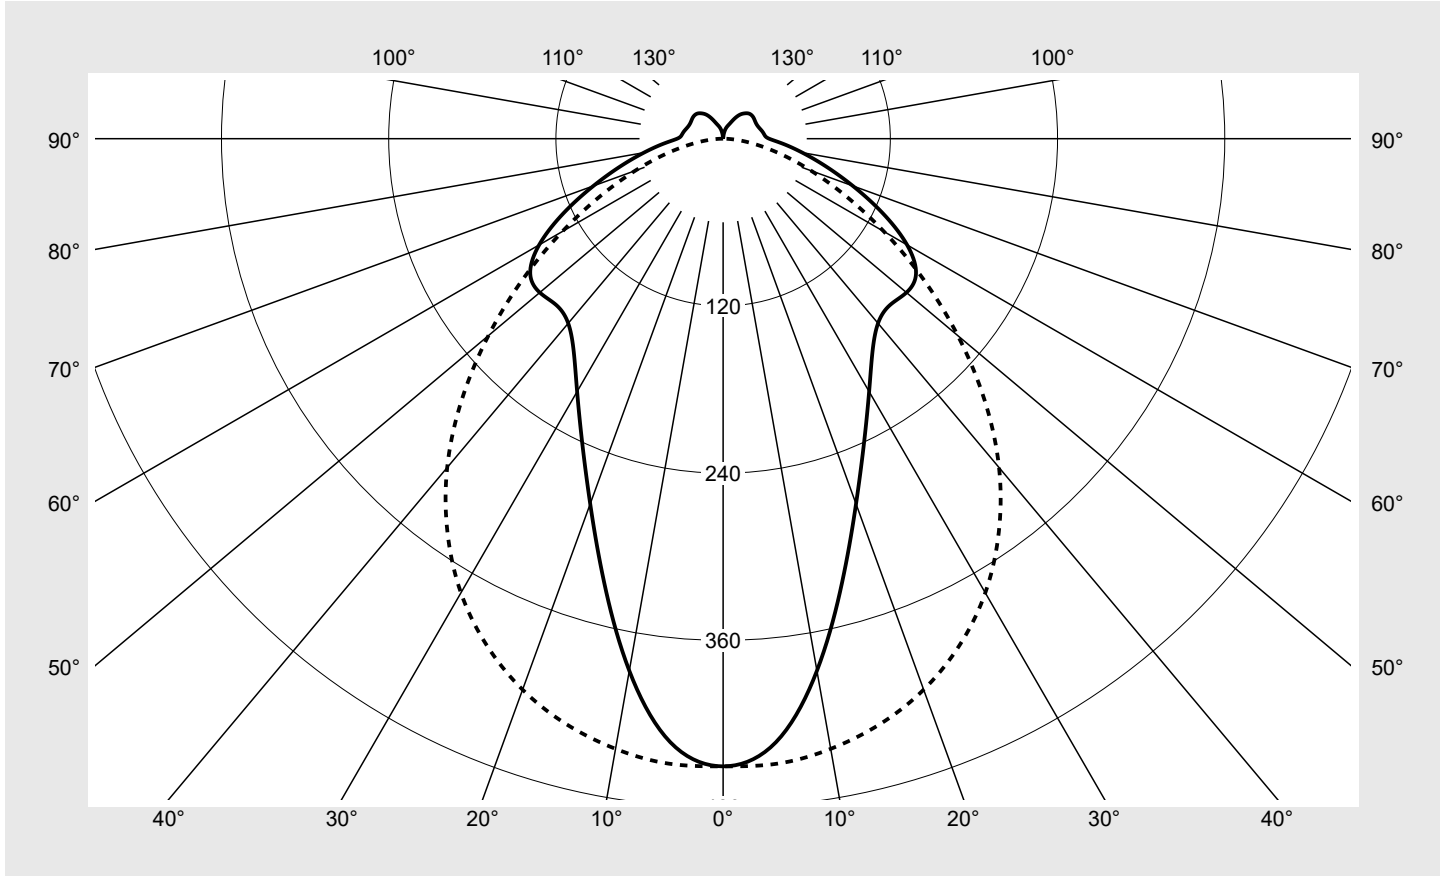


Photometric test report

Family Modario® 31 	Order number: 53BM8117U4GXC2 EAN: 4069025227089	LP number 59593_42
	Version diffuser optic, frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 16360 lm Power consumption = 90.4 W Luminous efficacy = 181 lm/W	serial documentation 30.08.2024

Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 450 cd/klm**



Classifications	
DIN 5040	A 4 1
CIE	N1=50 N2=78 N3=94 N4=90 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	90.4%
ϕ_o	9.6%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM8117U4GXC2 EAN: 4069025227089	LP number 59593_42
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	450.4	450.4	450.4	450.4	450.4	450.4	450.4	2.7	2.7
5°	434.8	434.4	434.2	439.8	445.7	448.7	450.2	21.1	23.8
10°	387.7	390.2	396.4	411.2	428.2	439.8	444.6	39.4	63.1
15°	329.8	334.4	345.9	370.2	400.2	424.7	434.9	53.4	116.5
20°	278.9	283.9	296.1	324.2	364.7	403.3	420.8	63.2	179.7
25°	239.6	243.9	253.6	279.8	325.0	376.1	401.3	69.5	249.1
30°	209.6	212.8	219.1	240.3	283.9	343.6	376.3	72.7	321.9
35°	186.9	188.8	191.5	205.8	243.8	306.6	344.9	73.5	395.4
40°	173.0	173.1	171.1	177.5	207.0	267.1	308.1	72.6	468.0
45°	169.1	166.9	158.6	155.4	174.1	225.8	265.4	70.9	538.9
50°	171.8	167.4	153.3	140.0	146.6	186.3	219.9	69.2	608.2
55°	169.0	164.3	148.2	128.3	123.8	150.1	175.1	66.4	674.5
60°	152.5	148.9	135.5	115.0	103.6	117.6	133.2	60.4	734.9
65°	126.3	124.1	114.5	97.6	84.4	89.2	96.9	51.5	786.4
70°	99.0	97.7	90.6	78.2	65.9	64.8	67.1	41.2	827.6
75°	76.1	75.0	69.7	60.3	49.1	44.1	43.1	31.6	859.2
80°	57.7	56.8	53.2	44.9	34.6	27.3	24.1	23.2	882.4
85°	43.5	42.6	39.5	32.5	22.9	14.7	10.1	16.3	898.6
90°	33.0	32.1	28.8	22.5	14.4	6.3	0.8	11.1	909.7
95°	29.9	28.9	25.8	20.4	13.4	6.1	0.9	10.0	919.7
100°	28.7	27.7	24.5	19.6	13.4	6.3	0.9	9.6	929.3
105°	27.4	26.4	23.6	19.5	13.7	6.7	0.8	9.2	938.4
110°	26.5	25.4	23.3	19.7	14.2	7.2	0.7	8.9	947.3
115°	26.1	25.1	23.5	20.2	14.6	6.8	0.8	8.6	955.9
120°	26.2	25.3	23.9	20.5	14.8	6.4	0.8	8.3	964.2
125°	26.5	25.6	24.0	20.4	14.4	6.3	0.8	7.8	972.0
130°	26.5	25.4	23.5	19.6	12.9	6.2	0.9	7.1	979.0
135°	25.6	24.4	22.2	18.2	10.9	5.6	1.1	6.1	985.2
140°	23.7	22.4	20.1	15.4	9.4	4.6	1.1	4.9	990.1
145°	21.0	19.8	17.0	12.1	7.6	3.5	1.3	3.7	993.8
150°	16.9	15.5	12.9	9.4	6.3	2.5	1.3	2.5	996.4
155°	12.6	11.7	10.1	7.4	5.2	1.9	1.4	1.7	998.0
160°	9.9	9.3	7.5	5.7	3.8	1.6	1.4	1.0	999.1
165°	7.7	7.3	5.1	4.1	2.4	1.5	1.4	0.6	999.7
170°	4.8	3.7	2.7	2.3	1.6	1.5	1.5	0.2	999.9
175°	1.6	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

Photometric test report

Family Modario® 31	Order number: 53BM8117U4GXC2 EAN: 4069025227089	LP number 59593_42
------------------------------	--	------------------------------

UGR-Table	Standard room	siteco								
------------------	----------------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.1	23.8	22.5	24.1	24.4	22.6	24.3	23.0	24.6	24.9
	3H	23.9	25.4	24.3	25.7	26.1	23.8	25.4	24.2	25.7	26.0
	4H	24.6	26.0	25.0	26.3	26.7	24.3	25.7	24.7	26.1	26.4
	6H	25.1	26.5	25.6	26.8	27.2	24.6	25.9	25.0	26.3	26.7
	8H	25.4	26.7	25.9	27.0	27.4	24.8	26.0	25.2	26.4	26.8
	12H	25.7	26.8	26.1	27.2	27.6	24.8	26.0	25.3	26.4	26.8
4H	2H	22.7	24.1	23.1	24.5	24.9	23.1	24.5	23.5	24.9	25.2
	3H	24.7	25.9	25.1	26.3	26.7	24.5	25.7	24.9	26.1	26.5
	4H	25.5	26.6	25.9	27.0	27.4	25.0	26.1	25.5	26.5	27.0
	6H	26.2	27.2	26.7	27.6	28.1	25.4	26.4	25.9	26.8	27.3
	8H	26.6	27.5	27.0	27.9	28.4	25.6	26.5	26.1	26.9	27.4
	12H	26.9	27.7	27.4	28.1	28.6	25.7	26.5	26.2	27.0	27.5
8H	4H	25.8	26.7	26.2	27.1	27.6	25.4	26.2	25.8	26.7	27.1
	6H	26.7	27.4	27.2	27.9	28.4	25.9	26.6	26.4	27.1	27.6
	8H	27.1	27.8	27.6	28.3	28.8	26.1	26.8	26.6	27.2	27.8
	12H	27.6	28.1	28.1	28.6	29.2	26.3	26.8	26.8	27.3	27.9
12H	4H	25.8	26.6	26.3	27.1	27.6	25.4	26.2	25.9	26.7	27.2
	6H	26.8	27.4	27.3	27.9	28.4	26.0	26.7	26.5	27.1	27.7
	8H	27.3	27.8	27.8	28.3	28.9	26.3	26.8	26.8	27.3	27.9

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2392	H(C0) = 25	H(C180) = 25
			B = 75	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		16353.5	16277.2	15872.0	16222.3	19242.2	26811.2	34223.4	
50°		17439.7	17166.6	16178.9	15507.2	17348.7	23971.0	31196.1	
55°		18201.8	17895.4	16689.1	15255.5	15903.3	21245.9	27834.5	
60°		17627.7	17439.8	16472.2	14896.3	14663.0	18653.0	24300.2	
65°		15890.4	15843.1	15255.4	13990.2	13421.7	16241.1	20913.5	
70°		13783.5	13819.6	13466.5	12656.9	12049.7	13963.3	17901.5	
75°		11942.8	12008.1	11825.5	11299.0	10662.5	11766.4	15172.6	
80°		10490.7	10557.9	10589.2	10084.6	9341.7	9642.6	12632.2	
85°		9458.2	9527.4	9622.7	9195.7	8233.3	7759.0	10521.8	

Photometric test report

Family
Modario® 31

Order number: 53BM8117U4GXC2
EAN: 4069025227089

LP number
59593_42

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

