

#### **Order No.:** 5TR101C0Q | **GTIN (EAN):** 4069025022646 **Product description:** Mod,trunk.rail,5SUa1SU,L1495,12x2.5<sup>2</sup>,wh



Modario<sup>®</sup>, trunking rail, of sheet steel, coated, pure white, 5x system unit 299mm 10-core and 1x system unit 1495mm 2-core, length: 1.495 mm, width: 58 mm, height: 43mm, through-wiring: 12x 2.5mm<sup>2</sup>, with terminal, 10+2-pole, max. 2.5mm<sup>2</sup>, protection rating (complete): for IP20 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 2.5 GTIN (EAN): 4069025022646

 1495
 |
 |
 58 |

 1495
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1
 1
 1000
 1000

 1

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 07.06.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

## ѕітесо

#### Order No.: 5TR101C0Q | GTIN (EAN): 4069025022646 Detailed technical description: Mod,trunk.rail,5SUa1SU,L1495,12x2.5<sup>2</sup>,wh



#### Key data

- Product type: trunking components group (TS)
- Product name: Modario<sup>®</sup>
- Order No.: 5TR101C0Q

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lamps:

 Supplement: for electrical and mechanical plug and socket connection of rail elements

#### **Certificates, Standards**

- Protection rating: for IP20 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- trunking rail: sheet steel, coated, pure white, 5x system unit 299mm 10-core and 1x system unit 1495mm 2-core
- Colour specification: pure white

#### Mounting

- Mounting method, mounting location: suspended mounting, surfacemounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

#### **Electrical connection**


- Connection: terminal, 10+2-pole, max.
  2.5mm<sup>2</sup>
- Through-wiring: 12x 2.5mm<sup>2</sup>

#### **Dimensions, Weight**

- Length: 1495mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 2.5kg

# ѕітесо

### **Order No.:** 5TR101C0Q | **GTIN (EAN):** 4069025022646 **Dimensions:** Mod,trunk.rail,5SUa1SU,L1495,12x2.5<sup>2</sup>,wh

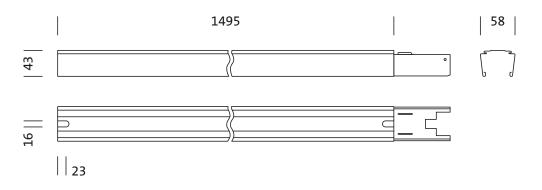

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 07.06.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -