

Order No.: 5LZ904002 | GTIN (EAN): 4008321292599


Product description: SConrepea,DALI,rec



SITECO Connectrepeater, master, central control, dimmable, installation type: recessed, installation location: in the luminaire, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 100..240V, voltage type: AC, 1 x DALI, 1 x TouchDim input, 1 x DALI broadcast, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1
GTIN (EAN): 4008321292599



Order No.: 5LZ904002 | GTIN (EAN): 4008321292599

Detailed technical description: SConrepea,DALI,rec



Key data

- System family: DALI
- Product type: repeater
- Product name: SITECO Connect
- Order No.: 5LZ904002

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+50°C
- Certification, designation: CE

Material, Colour

- housing: plastic, grey
- housing: plastic, grey
- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in the luminaire
- Supplement: only suitable for indoor use

Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm²
- Nominal voltage: 100..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 189mm
- Width: 30mm
- Height: 21mm
- Mounting distance: 180mm
- Weight: 0.1kg

Inputs

1x DALI

- Connection: plug-in terminal, 2-pole, max. 1.5mm²

1x TouchDim input

- Connection: plug-in terminal, 1-pole, max. 1.5mm²


Outputs

1x DALI broadcast

- Connection: plug-in terminal, 2-pole, max. 1.5mm²
- Limiting: max. 64x ECG DALI
- System current: max. 130mA
- Cable length: max. 300m

Order No.: 5LZ904002 | GTIN (EAN): 4008321292599

Dimensions: SConrepea,DALI,rec

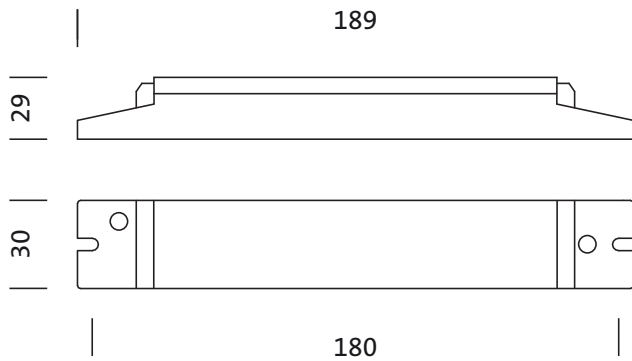

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 24.08.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -