

**Order No.:** 5LZ904712A | **GTIN (EAN):** 4058352548448


**Product description:** SCon21O,controller,centCtrl,netw.ETH



SITECO Connect 21-Ocontroller, master, central control, dimmable, installation type: recessed, installation location: in an electrical distributor, of plastic, part units: 6 part units, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, voltage: 100..240V, voltage type: AC, 1 x network connector Ethernet, 2 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2  
GTIN (EAN): 4058352548448

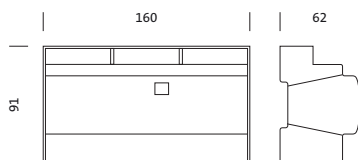

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 16.08.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ904712A | **GTIN (EAN):** 4058352548448

**Detailed technical description:** SCon21O,controller,centCtrl,netw.ETH



## Key data

- System family: SITECO Connect 21 O
- Product type: lighting management components
- Product name: SITECO Connect 21-O
- Order No.: 5LZ904712A

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

#### Material, Colour

- housing: plastic, grey, 6 part units
- Colour specification: grey

#### Mounting

- Mounting method, mounting location: recessed, in an electrical distributor
- Supplement: only suitable for indoor use

#### Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 100..240V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 91mm
- Width: 107mm
- Height: 62mm
- Weight: 0.2kg

#### Outputs

##### 2x DALI-2

- Connection: plug-in terminal, 2-pole, max. 2.5mm<sup>2</sup>
- Limiting: max. 64x ECG DALI
- System current: DALI current 250mA per DALI line
- Cable length: max. 300m


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 16.08.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ904712A | **GTIN (EAN):** 4058352548448

**Dimensions:** SCon21O,controller,centCtrl,netw.ETH

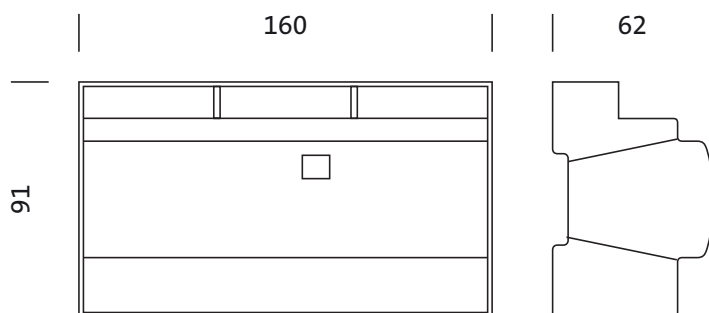

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 16.08.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -