


# Photometric test report

<b>Family</b> Rondel 31	<b>Order number:</b> 51WC10DA42A + 51WC10E <b>EAN:</b> 4058352616758 + 4058352616871	<b>LP number</b> 59346_7
<b>Version</b>	enclosure, PC, transparent, opal, emergency light element 3h operating duration, diffuse beam	<b>serial documentation</b> 09.09.2022
<b>Lamps</b>	LED 4000 K   CRI ≥ 80	
<b>Controlgear</b>	ECG-DALI	
<b>Setting</b>	emergency light operation: 3 h	
<b>Rated values</b>	Net luminous flux = 210 lm Power consumption = 2.0 W Luminous efficacy = 105 lm/W	



**Luminous intensity in cd/klm** C180-0 **Imax: 322 cd/klm**

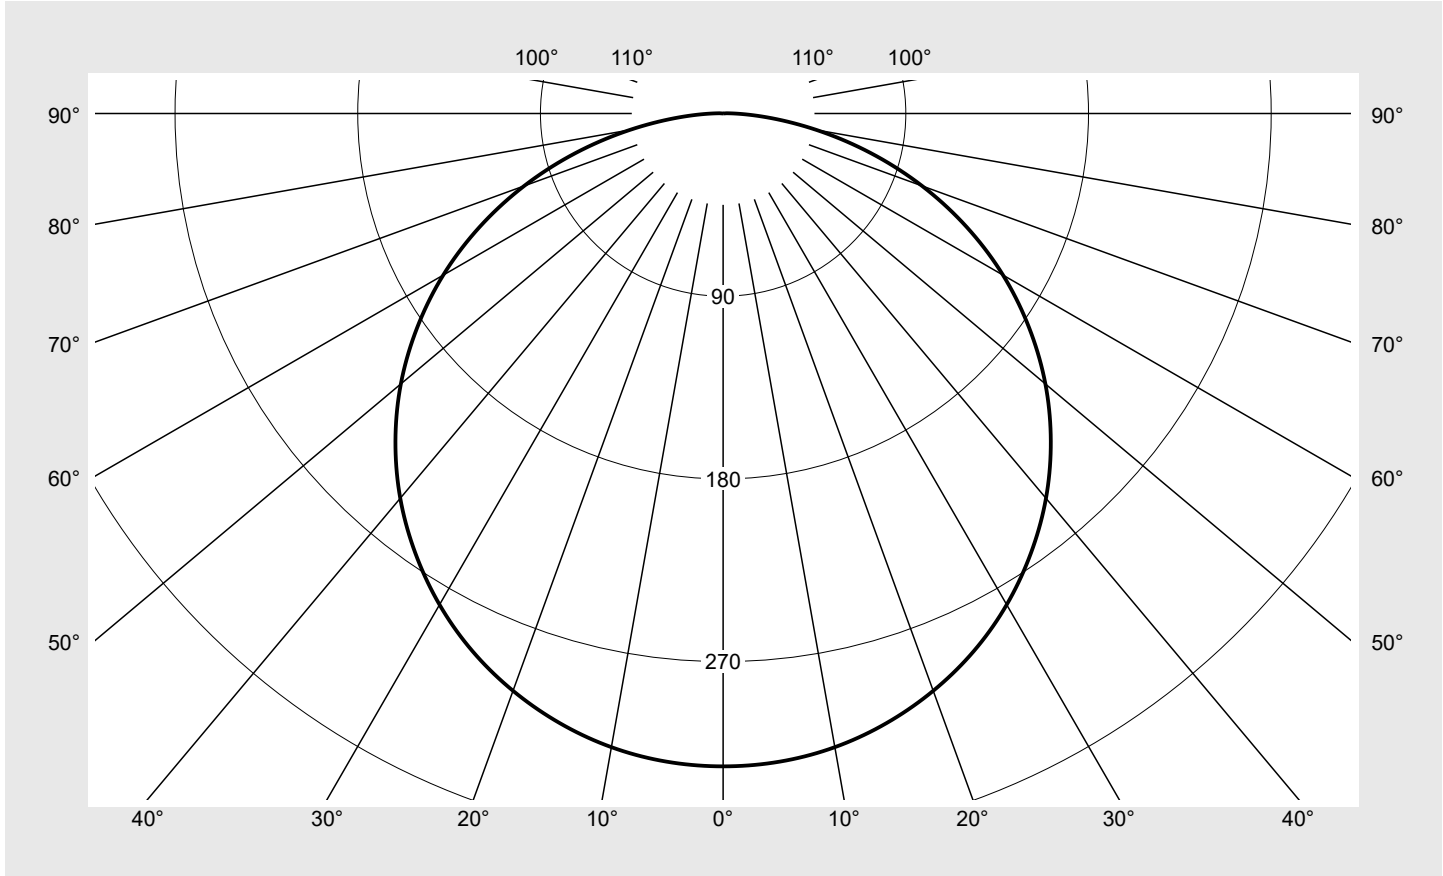

Classifications	
DIN 5040	A 4 1
CIE	N1=45 N2=76 N3=95 N4=99 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	99.5%
$\phi_o$	0.5%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Rondel 31	<b>Order number: 51WC10DA42A + 51WC10E</b> <b>EAN: 4058352616758 + 4058352616871</b>	<b>LP number</b> 59346_7
----------------------------	---	-----------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>sITeco</b>
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	321.6	1.9	1.9
5°	320.5	15.3	17.2
10°	317.0	30.2	47.4
15°	310.9	44.1	91.5
20°	302.6	56.7	148.2
25°	292.2	67.7	215.9
30°	279.4	76.6	292.5
35°	264.4	83.1	375.6
40°	247.4	87.2	462.8
45°	228.3	88.5	551.3
50°	207.2	87.0	638.3
55°	184.0	82.6	721.0
60°	159.2	75.6	796.5
65°	132.4	65.8	862.3
70°	104.3	53.7	916.1
75°	75.3	39.9	955.9
80°	46.8	25.2	981.2
85°	21.7	11.8	993.0
90°	5.5	3.0	996.0
95°	1.6	0.9	996.9
100°	1.2	0.6	997.5
105°	1.0	0.6	998.1
110°	0.9	0.4	998.5
115°	0.7	0.4	998.9
120°	0.6	0.3	999.2
125°	0.5	0.2	999.4
130°	0.4	0.2	999.6
135°	0.3	0.1	999.7
140°	0.2	0.1	999.8
145°	0.2	0.1	999.8
150°	0.2	0.0	999.9
155°	0.2	0.0	999.9
160°	0.2	0.0	999.9
165°	0.2	0.0	1000.0
170°	0.2	0.0	1000.0
175°	0.2	0.0	1000.0
180°	0.2	0.0	1000.0

## Photometric test report

Family <b>Rondel 31</b>	Order number: <b>51WC10DA42A + 51WC10E</b> EAN: <b>4058352616758 + 4058352616871</b>	LP number <b>59346_7</b>
----------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	10.6	12.3	11.0	12.7	13.0	10.6	12.3	11.0	12.7	13.0
	3H	12.3	13.8	12.7	14.2	14.5	12.3	13.8	12.7	14.2	14.5
	4H	12.9	14.4	13.3	14.7	15.1	12.9	14.4	13.3	14.7	15.1
	6H	13.4	14.8	13.8	15.1	15.5	13.4	14.8	13.8	15.1	15.5
	8H	13.6	14.8	14.0	15.2	15.6	13.6	14.8	14.0	15.2	15.6
	12H	13.6	14.9	14.1	15.3	15.7	13.6	14.9	14.1	15.3	15.7
4H	2H	11.4	12.9	11.8	13.2	13.6	11.4	12.9	11.8	13.2	13.6
	3H	13.2	14.5	13.7	14.9	15.3	13.2	14.5	13.7	14.9	15.3
	4H	14.0	15.1	14.4	15.5	16.0	14.0	15.1	14.4	15.5	16.0
	6H	14.6	15.6	15.0	16.0	16.4	14.6	15.6	15.0	16.0	16.4
	8H	14.8	15.7	15.2	16.1	16.6	14.8	15.7	15.2	16.1	16.6
	12H	14.9	15.7	15.4	16.2	16.7	14.9	15.7	15.4	16.2	16.7
8H	4H	14.3	15.3	14.8	15.7	16.2	14.3	15.3	14.8	15.7	16.2
	6H	15.0	15.8	15.5	16.3	16.7	15.0	15.8	15.5	16.3	16.7
	8H	15.3	16.0	15.8	16.4	16.9	15.3	16.0	15.8	16.4	16.9
	12H	15.5	16.0	16.0	16.5	17.1	15.5	16.0	16.0	16.5	17.1
12H	4H	14.4	15.2	14.9	15.7	16.1	14.4	15.2	14.9	15.7	16.1
	6H	15.1	15.8	15.6	16.2	16.8	15.1	15.8	15.6	16.2	16.8
	8H	15.4	16.0	15.9	16.5	17.0	15.4	16.0	15.9	16.5	17.0

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	Photometric dimensions in mm: D = 350	H(C0) = 32 H(C90) = 32	H(C180) = 32 H(C270) = 32
------------------------	---	---------------------------------------	---------------------------	------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	631.2
50°	618.0
55°	600.5
60°	578.4
65°	547.4
70°	504.3
75°	442.6
80°	354.1
85°	233.1

**Photometric test report**

<b>Family</b> Rondel 31	<b>Order number: 51WC10DA42A + 51WC10E</b> <b>EAN: 4058352616758 + 4058352616871</b>	<b>LP number</b> 59346_7
----------------------------	---	-----------------------------

**Luminance values in cd/m<sup>2</sup>**      γ 65°    γ 70°    γ 75°    γ 80°    γ 85°      **siteco**

