

Photometric test report

Family
SMALL BELL LED

Order number: **5XA1573K1B108**
EAN: **4058352168080**

LP number
57649_8



Version suspended mounting at curved mast extension or wall bracket
Optic asymmetric wide distribution
Cover enclosure, transparent
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG Plus
Rated values Net luminous flux = 1730 lm
Power consumption = 13.2 W
Luminous efficacy = 131.1 lm/W

serial
documentation
18.11.2020

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: **797 cd/klm**

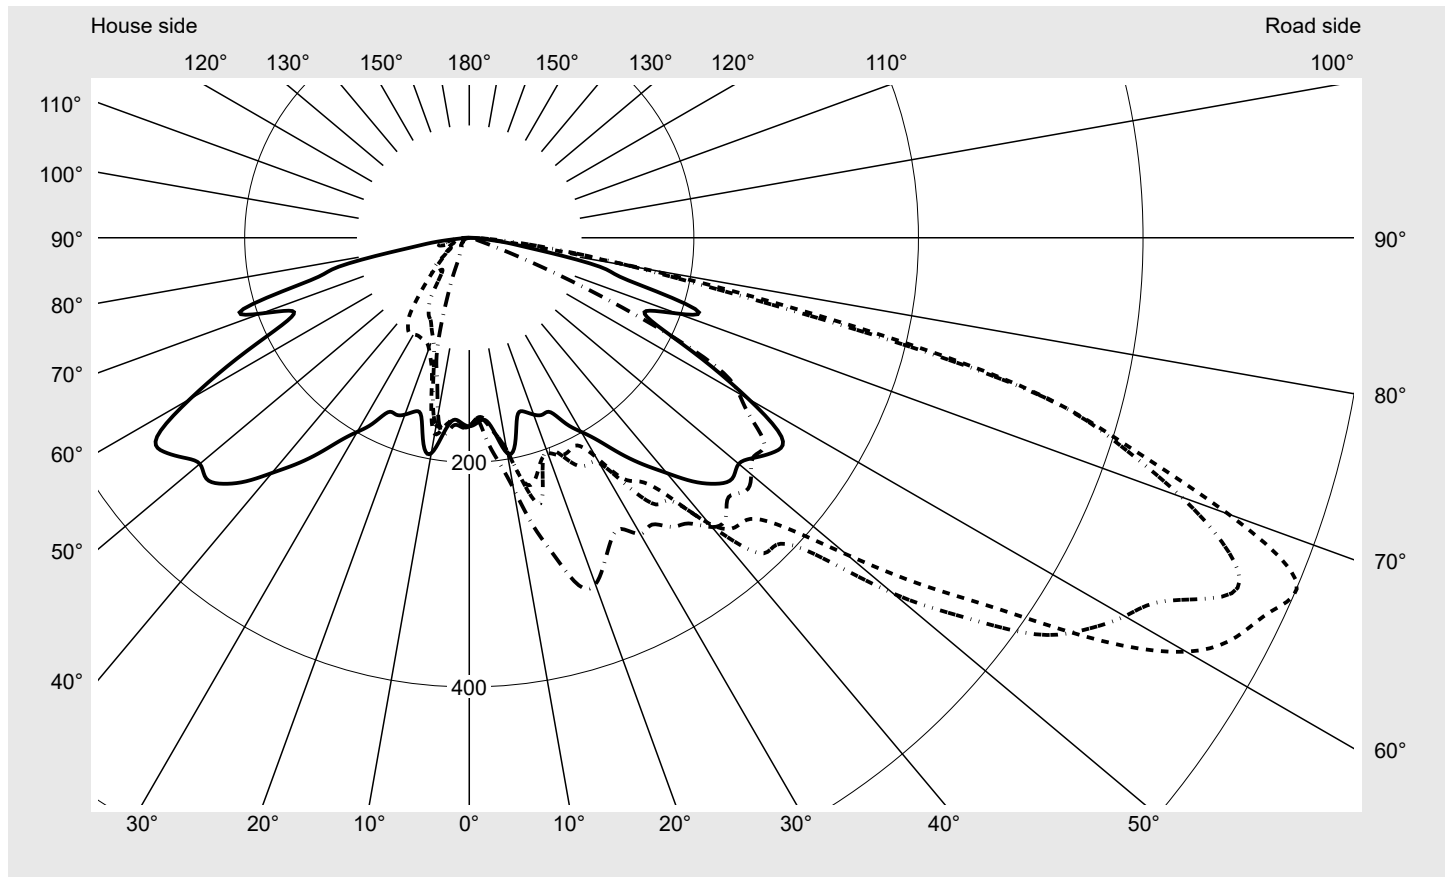

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	99.4%
Eta 90° - 180°	0.6%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	719.4
Imax 80°	154.2
Imax 90°	3.4
Imax >90°	5.9
Imax >95°	5.9


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
--	---	------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

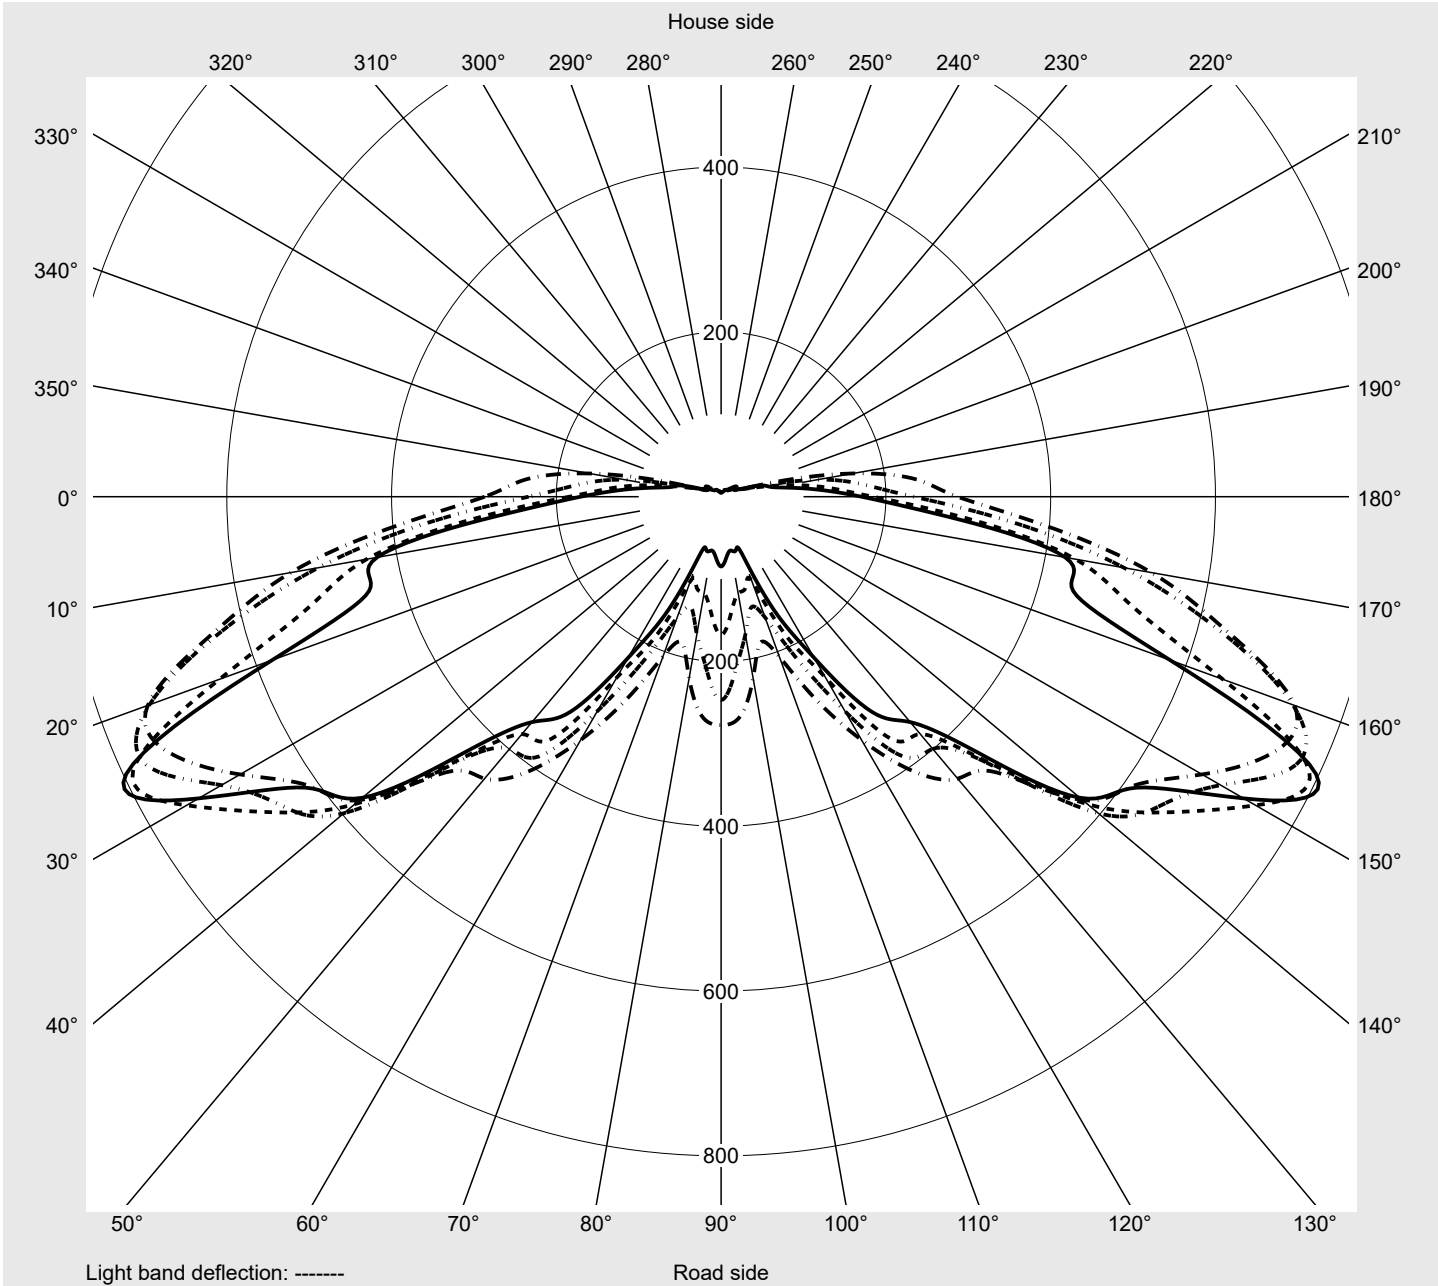

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9
2,5°	164.9	164.8	164.5	165.1	163.4	160.9	160.7	162.9	162.3	161.6	161.5	161.0	162.7
5,0°	163.0	163.3	161.2	163.0	165.2	164.4	162.6	165.6	167.4	167.7	172.1	173.6	175.3
7,5°	175.6	179.4	180.6	176.7	176.1	176.0	175.2	173.5	176.8	178.4	181.0	185.1	192.7
10,0°	194.9	195.9	196.9	197.5	197.8	192.0	192.6	191.2	195.0	196.5	199.7	207.7	210.9
12,5°	188.3	195.5	204.1	210.1	216.4	222.0	223.9	226.4	223.1	217.8	220.0	224.4	228.6
15,0°	164.9	174.6	179.5	197.5	208.4	224.1	244.8	244.0	235.7	229.5	232.1	237.8	239.8
17,5°	162.3	160.5	165.9	180.1	192.6	210.3	217.2	223.2	227.4	230.9	225.2	228.4	236.0
20,0°	167.6	178.8	188.5	194.8	201.2	204.2	201.5	198.7	201.4	209.1	223.0	230.8	232.7
22,5°	170.4	198.7	209.0	210.6	210.9	209.7	207.6	203.7	205.7	203.4	207.6	222.9	240.9
25,0°	171.5	186.6	196.0	196.7	201.6	209.7	222.8	225.7	217.2	206.0	206.3	228.3	256.7
27,5°	186.7	191.1	204.8	202.5	202.4	208.5	227.9	245.4	251.4	238.7	229.7	246.4	273.6
30,0°	199.6	214.1	226.3	229.8	228.6	225.4	231.6	253.8	266.8	274.8	272.1	275.3	288.9
32,5°	214.3	219.5	229.9	235.6	248.6	254.0	261.8	270.1	280.7	295.0	319.4	313.3	305.8
35,0°	234.7	240.3	245.8	247.3	254.6	265.0	290.0	307.5	307.9	313.6	339.5	354.3	335.2
37,5°	254.5	276.3	277.7	281.6	287.1	288.6	295.2	333.0	338.3	337.4	347.6	383.0	366.3
40,0°	273.4	280.0	283.5	296.8	325.7	332.3	335.1	337.8	368.3	389.1	371.0	391.5	388.0
42,5°	294.2	289.7	294.5	307.7	337.9	349.9	380.8	383.4	387.4	420.2	411.7	411.6	407.3
45,0°	309.8	301.5	332.6	349.0	370.5	354.1	386.7	421.6	434.2	435.4	437.7	436.4	432.9
47,5°	317.6	328.3	380.7	410.0	414.2	382.1	416.9	450.9	465.5	458.6	442.0	455.0	433.6
50,0°	313.2	338.0	439.5	440.4	477.4	439.0	492.8	503.7	467.6	447.2	441.8	451.3	426.2
52,5°	321.4	342.6	441.6	470.9	533.3	507.3	554.9	554.1	472.4	434.6	450.6	453.3	421.6
55,0°	332.2	356.9	442.9	516.4	601.9	577.2	615.6	590.7	526.2	468.4	469.6	451.0	402.2
57,5°	329.6	390.9	488.2	597.9	690.8	668.2	649.6	582.9	561.9	494.5	470.7	444.7	392.8
60,0°	287.0	392.6	530.4	637.8	740.6	737.3	674.2	611.3	572.9	473.4	446.7	406.8	340.9
62,5°	233.7	355.2	496.6	625.9	738.5	769.9	700.2	652.6	597.8	457.2	399.6	384.8	300.7
65,0°	184.2	298.2	437.0	517.9	648.2	787.6	749.1	667.6	580.6	453.1	376.1	358.5	253.7
67,5°	170.5	275.3	424.1	442.5	580.0	796.9	732.3	615.7	568.5	437.4	357.1	318.6	225.8
70,0°	197.3	309.6	444.3	463.4	541.2	719.4	674.9	560.3	501.1	382.0	320.0	277.1	183.9
72,5°	210.9	347.6	434.5	472.2	530.9	612.9	603.1	473.5	383.8	294.0	251.7	215.8	145.0
75,0°	146.6	297.8	357.5	393.3	487.2	506.2	499.9	337.1	254.5	207.3	189.0	180.2	115.8
77,5°	119.0	205.3	238.0	263.6	322.0	314.8	279.1	185.5	157.4	130.1	149.5	147.2	97.4
80,0°	61.6	88.3	107.7	140.7	137.2	154.2	147.4	115.0	104.5	67.1	64.3	64.5	42.9
82,5°	33.8	44.0	52.4	65.5	55.2	51.2	75.0	82.7	67.4	35.2	24.2	14.9	9.5
85,0°	10.1	14.5	15.0	18.2	14.0	20.0	33.0	37.1	20.9	14.0	7.4	5.8	4.3
87,5°	5.0	4.8	4.8	4.5	5.6	7.7	10.6	11.4	8.7	5.5	3.8	3.3	2.8
90,0°	2.2	2.5	2.3	2.2	2.6	3.4	2.6	2.8	2.1	2.0	1.9	1.8	1.7
92,5°	1.7	1.7	1.5	1.5	1.5	1.5	1.9	1.7	1.8	1.8	1.8	1.4	1.3
95,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.0
97,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.9	2.6	5.4	5.7	1.2
100,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.0	3.4	4.4	5.4	0.9
102,5°	1.5	1.5	1.4	1.3	1.5	1.3	1.1	1.0	1.0	1.0	1.3	3.4	3.3
105,0°	1.3	1.3	1.0	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.2	3.8
107,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.1	0.4	0.6	0.5	0.5	0.5
110,0°	1.0	1.0	1.0	1.0	0.9	0.8	0.6	0.5	0.5	0.5	0.5	0.5	0.5
112,5°	1.0	1.0	1.0	0.7	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9
2,5°	160.3	160.7	159.2	165.5	163.7	161.6	166.2	163.9	164.5	166.1	167.3	168.1	167.5
5,0°	175.4	180.0	183.0	183.2	183.4	181.2	162.3	160.4	161.6	162.3	164.0	164.5	165.9
7,5°	192.9	192.0	193.5	196.1	199.9	201.4	172.2	168.6	169.6	167.9	169.6	166.8	159.3
10,0°	215.8	215.0	220.4	224.5	226.8	226.8	189.6	186.7	180.8	178.3	177.3	169.6	161.9
12,5°	233.5	241.6	246.2	249.9	255.2	262.5	181.7	174.0	165.6	162.6	156.4	149.6	145.1
15,0°	249.4	260.1	270.9	283.6	283.2	293.2	155.9	150.1	142.2	135.8	128.4	122.6	120.7
17,5°	248.9	264.6	287.0	307.0	320.4	324.6	161.6	151.5	138.9	123.6	114.0	104.3	100.5
20,0°	241.5	263.3	283.8	304.2	323.8	328.5	163.9	156.8	145.5	119.3	105.0	94.5	88.5
22,5°	255.8	269.1	279.6	295.5	307.3	313.9	155.8	143.6	128.2	116.2	100.1	87.6	78.7
25,0°	262.9	272.2	284.5	293.9	295.4	298.1	147.4	127.3	122.5	112.9	99.3	81.3	64.8
27,5°	287.6	289.2	294.4	293.3	296.4	292.3	167.1	141.5	121.2	112.5	98.4	78.0	54.5
30,0°	310.8	306.4	305.1	302.1	305.2	304.4	182.5	158.1	129.0	114.8	99.4	71.9	46.6
32,5°	322.6	321.3	305.5	311.8	308.4	302.8	192.8	164.4	140.7	118.2	100.0	64.4	36.5
35,0°	341.9	334.0	315.6	307.6	323.7	314.3	218.8	177.6	147.3	125.0	95.2	50.8	30.2
37,5°	350.4	341.9	319.9	312.6	317.6	320.6	243.5	200.7	158.1	133.7	87.7	41.1	33.0
40,0°	376.6	356.1	324.9	316.3	328.7	336.3	258.1	208.6	167.9	132.3	74.3	37.2	35.8
42,5°	389.9	349.3	322.2	327.8	331.1	338.1	282.9	219.8	173.5	131.1	61.6	40.1	40.0
45,0°	408.1	345.0	323.4	340.0	332.2	326.6	307.0	236.1	174.2	119.7	50.9	44.5	43.8
47,5°	410.0	331.8	328.3	335.3	344.1	333.8	316.8	244.4	178.8	102.5	42.6	44.9	44.8
50,0°	387.0	325.7	320.6	323.1	338.7	327.6	313.4	236.8	173.7	75.6	35.3	40.4	37.6
52,5°	357.7	312.5	314.7	321.1	330.4	319.6	310.9	236.4	167.9	54.8	30.2	34.1	31.0
55,0°	315.3	282.0	280.7	305.0	320.1	321.0	315.1	231.6	149.3	36.1	26.1	26.7	27.1
57,5°	278.7	230.7	241.1	269.0	297.1	296.6	295.7	197.0	111.7	29.3	22.5	24.4	24.4
60,0°	270.9	206.5	183.5	223.4	267.4	277.2	238.5	162.4	71.5	27.8	19.2	21.5	22.0
62,5°	216.3	155.9	139.7	169.6	208.8	246.7	172.5	118.5	50.6	28.0	18.9	18.8	19.5
65,0°	185.7	109.0	114.4	119.0	141.1	167.6	128.4	80.0	43.3	27.1	19.6	19.1	17.2
67,5°	151.7	73.4	67.9	66.3	73.9	84.7	108.9	65.9	52.7	30.6	21.6	18.7	14.9
70,0°	117.5	58.4	43.6	25.6	32.1	31.1	121.9	69.9	60.8	33.5	20.4	16.0	13.3
72,5°	76.8	53.7	19.1	9.9	11.6	10.4	112.6	70.1	61.6	31.7	21.2	14.5	13.0
75,0°	55.1	27.1	11.9	7.4	7.2	6.7	66.7	56.7	48.5	30.9	26.9	18.5	14.3
77,5°	39.7	9.4	6.8	5.9	5.9	5.2	53.9	41.7	35.7	31.4	26.3	21.9	15.5
80,0°	16.1	6.4	5.4	5.0	4.9	4.6	37.5	33.4	35.0	27.4	19.6	18.1	14.4
82,5°	6.7	4.3	3.9	3.8	3.6	4.1	26.1	25.1	25.9	17.5	15.2	13.4	11.6
85,0°	3.3	2.8	2.8	2.8	2.9	3.0	10.3	11.5	14.5	13.1	11.1	11.2	7.2
87,5°	2.2	1.8	1.8	1.8	1.8	2.1	4.7	5.8	6.5	9.2	8.0	6.9	5.3
90,0°	1.3	1.1	1.0	1.0	1.0	1.0	2.5	2.5	2.3	2.2	2.3	2.3	2.0
92,5°	1.1	1.0	0.7	0.8	0.8	0.5	1.6	1.9	1.8	1.8	1.8	1.8	1.8
95,0°	1.0	0.8	0.5	0.5	0.5	0.5	1.5	1.5	1.7	1.8	1.9	1.8	1.7
97,5°	1.1	0.5	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.7	1.8	1.8	1.8
100,0°	0.8	0.5	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
102,5°	0.8	0.5	0.5	0.5	0.5	0.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
105,0°	0.6	0.5	0.5	0.5	0.5	0.5	1.2	1.5	1.5	1.5	1.5	1.5	1.5
107,5°	0.5	0.5	0.5	0.5	0.5	0.5	1.3	1.3	1.3	1.4	1.5	1.5	1.5
110,0°	0.5	0.5	0.5	0.5	0.3	0.5	1.0	1.0	1.0	1.0	1.0	1.2	1.4
112,5°	0.6	0.5	0.4	0.3	0.0	0.2	1.0	1.0	1.0	1.3	1.0	1.1	1.1

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	167.9	0.3	0.3
2,5°	168.3	169.1	171.3	173.3	170.0	173.1	173.8	174.1	171.8	172.1	168.5	2.0	2.2
5,0°	167.1	168.5	173.3	177.1	177.0	176.6	173.2	175.3	171.5	173.0	168.2	4.1	6.3
7,5°	156.2	157.6	160.5	162.0	166.5	169.9	173.9	176.1	177.5	177.9	176.7	6.3	12.6
10,0°	153.8	148.3	151.2	150.0	149.6	155.0	157.0	162.5	165.3	166.2	159.9	8.8	21.4
12,5°	137.1	134.7	134.0	133.7	136.0	138.5	143.1	141.8	138.0	134.7	131.6	11.1	32.5
15,0°	118.3	111.3	110.1	103.1	105.4	108.8	116.8	123.0	121.9	115.0	113.2	12.7	45.2
17,5°	93.6	85.8	83.1	77.1	77.2	76.2	81.9	86.4	85.4	84.7	86.3	13.8	59.0
20,0°	82.2	69.6	65.5	58.3	58.7	57.4	55.7	54.7	52.9	56.5	58.4	14.9	73.9
22,5°	63.1	54.1	52.1	48.3	47.9	44.8	45.0	39.6	36.9	36.4	40.7	16.2	90.1
25,0°	48.0	40.7	37.7	39.8	38.1	36.2	35.2	29.9	26.4	26.2	26.6	17.4	107.5
27,5°	36.7	30.9	32.3	32.8	31.7	29.4	27.0	23.0	20.8	20.2	19.6	19.6	127.2
30,0°	30.0	28.9	28.1	27.8	26.1	23.5	22.3	19.4	17.9	17.3	16.8	22.5	149.7
32,5°	28.3	27.8	26.7	24.1	22.2	18.4	17.7	16.3	15.6	15.1	14.8	25.4	175.1
35,0°	29.1	27.9	24.6	22.6	20.3	17.1	15.7	14.6	13.9	12.8	12.8	28.7	203.8
37,5°	30.4	26.2	22.9	21.4	19.3	16.6	14.4	13.5	12.5	11.7	11.2	32.3	236.1
40,0°	32.2	24.0	21.8	19.8	17.2	14.9	13.3	12.3	11.5	10.7	10.4	35.9	272.0
42,5°	33.8	23.9	21.3	18.0	15.9	13.6	12.6	11.7	10.8	10.2	10.2	39.6	311.6
45,0°	34.1	25.0	19.1	16.1	14.5	12.8	11.6	10.9	10.3	9.9	10.3	43.4	355.0
47,5°	33.1	22.1	16.5	14.9	13.3	12.4	11.5	10.6	9.7	9.7	10.1	47.2	402.1
50,0°	27.7	20.3	14.9	13.4	12.6	12.1	11.3	9.7	8.9	8.8	9.2	50.1	452.3
52,5°	24.1	18.2	13.8	12.4	11.8	11.4	10.4	9.2	8.4	7.7	7.8	52.9	505.1
55,0°	21.4	16.6	13.1	11.9	11.0	10.3	9.8	8.7	7.9	7.2	7.1	55.8	561.0
57,5°	18.3	14.6	11.9	10.9	10.1	9.4	8.9	7.8	7.1	6.9	7.2	58.1	619.0
60,0°	17.1	13.3	10.6	10.2	9.6	8.9	7.7	7.3	6.6	6.6	6.1	58.1	677.1
62,5°	15.5	11.9	10.3	10.2	9.0	8.3	7.7	6.6	6.2	5.7	6.2	55.7	732.8
65,0°	13.4	11.1	10.6	9.9	9.0	7.7	7.3	6.2	5.6	5.6	5.6	51.7	784.5
67,5°	12.2	10.9	10.4	10.2	8.9	7.4	6.3	6.0	5.1	5.3	5.1	48.0	832.5
70,0°	12.0	10.7	10.2	9.7	8.7	7.1	5.9	5.0	4.6	5.0	4.7	45.0	877.4
72,5°	11.6	10.1	9.6	8.9	7.9	6.6	5.4	4.8	4.6	4.6	4.2	40.3	917.8
75,0°	11.6	10.0	8.8	8.0	6.9	6.1	4.9	4.3	4.1	4.0	4.2	32.5	950.3
77,5°	10.6	9.7	8.1	7.1	6.1	5.1	4.3	4.0	3.6	3.6	3.6	22.1	972.3
80,0°	10.1	8.0	6.8	6.2	5.2	4.1	3.6	3.5	3.1	3.1	3.1	11.8	984.2
82,5°	8.4	6.4	5.8	5.0	4.3	3.1	3.0	2.8	2.7	2.9	2.8	6.2	990.3
85,0°	5.4	4.5	4.1	3.6	3.1	2.6	2.4	2.3	2.6	2.5	2.5	2.6	992.9
87,5°	3.7	3.2	2.8	2.5	2.1	1.9	1.8	2.0	2.1	2.2	2.2	1.2	994.2
90,0°	2.0	2.0	1.7	1.8	1.5	1.4	1.4	1.5	1.5	2.1	1.8	0.5	994.7
92,5°	1.8	1.8	1.8	1.8	1.6	1.4	1.3	1.5	2.1	2.0	1.6	0.4	995.1
95,0°	2.1	2.2	3.3	4.6	3.5	1.8	1.5	1.7	2.1	2.1	1.5	0.5	995.6
97,5°	2.3	2.9	4.2	5.1	4.6	2.6	2.0	1.5	1.8	1.6	1.5	0.6	996.1
100,0°	1.8	1.9	2.7	4.4	4.1	2.7	1.5	1.5	1.5	1.5	1.5	0.5	996.6
102,5°	1.5	3.0	5.9	5.9	3.5	1.6	1.5	1.5	1.5	1.5	1.5	0.5	997.1
105,0°	1.8	3.1	5.3	5.7	3.4	2.0	1.5	1.5	1.5	1.5	1.5	0.4	997.5
107,5°	1.6	2.8	4.4	5.3	3.5	1.6	1.4	1.2	1.1	1.0	1.0	0.3	997.9
110,0°	1.5	2.0	3.1	3.3	2.5	1.2	1.0	1.0	1.0	1.0	1.0	0.3	998.1
112,5°	1.6	1.2	1.6	1.3	1.2	1.0	1.0	1.0	1.0	1.0	1.0	0.2	998.4

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
--	---	------------------------------------



Table of values for luminous intensities **Maximum luminous intensity**

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	1.0	1.0	1.0	1.0	0.8	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
117,5°	1.0	1.0	1.0	0.8	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.2
120,0°	1.0	1.0	1.0	1.0	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	0.3
122,5°	1.0	1.0	1.1	0.9	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.4	0.4
125,0°	1.0	0.9	1.1	0.8	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	0.4
127,5°	1.0	1.0	1.0	0.8	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	0.5
130,0°	1.0	1.0	0.9	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3
132,5°	1.0	1.0	0.9	1.0	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
135,0°	1.0	1.0	0.9	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	0.5	0.5	0.3	0.2	0.0	0.0	1.0	1.2	1.0	1.0	1.2	1.2	1.5
117,5°	0.4	0.1	0.3	0.2	0.1	0.0	1.0	1.0	1.0	1.1	1.3	1.3	1.4
120,0°	0.3	0.2	0.0	0.3	0.1	0.0	1.0	1.0	1.0	1.0	1.4	1.2	1.4
122,5°	0.5	0.4	0.3	0.2	0.2	0.0	1.0	1.0	1.0	1.2	1.4	1.5	1.4
125,0°	0.1	0.0	0.2	0.1	0.2	0.0	1.0	1.0	1.0	1.1	1.0	1.5	1.3
127,5°	0.5	0.1	0.4	0.3	0.1	0.0	1.0	1.0	1.0	1.0	1.0	1.3	1.5
130,0°	0.4	0.2	0.2	0.5	0.2	0.2	1.0	1.0	1.0	1.0	1.0	1.2	1.0
132,5°	0.5	0.3	0.3	0.3	0.2	0.3	1.0	1.0	1.0	1.0	1.0	1.0	1.2
135,0°	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	1.6	1.4	1.5	1.2	1.1	1.0	1.0	1.0	1.0	1.0	1.0	0.2	998.6
117,5°	1.5	1.5	1.0	1.1	1.0	1.1	1.0	1.0	1.0	1.0	1.0	0.2	998.8
120,0°	1.4	1.5	1.2	1.1	1.2	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.0
122,5°	1.5	1.2	1.3	1.3	1.3	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.2
125,0°	1.6	1.3	1.5	1.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.3
127,5°	1.5	1.5	1.6	1.4	1.3	1.2	1.0	1.0	1.0	1.0	1.0	0.2	999.5
130,0°	1.3	1.2	1.3	1.2	1.2	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.7
132,5°	1.3	1.4	1.5	1.3	1.4	1.1	1.2	1.0	1.0	1.0	1.0	0.2	999.9
135,0°	1.2	1.5	1.2	1.6	1.4	1.0	1.0	1.0	1.0	1.0	1.0	0.2	1000.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family SMALL BELL LED	Order number: 5XA1573K1B108 EAN: 4058352168080	LP number 57649_8
--	---	------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	1730	13.2	13.6	13.4
95	241	1641	12.6	12.9	12.8
90	229	1560	12.0	12.3	12.2
85	216	1471	11.3	11.6	11.4
80	203	1383	10.7	10.9	10.8
75	190	1294	10.1	10.3	10.2
70	178	1212	9.5	9.8	9.6
65	165	1124	8.9	9.1	9.0
60	152	1035	8.3	8.5	8.4
55	140	954	7.8	7.9	7.8
50	127	865	7.2	7.3	7.2
45	114	776	6.6	6.8	6.7
40	102	695	6.1	6.2	6.2
35	89	606	5.6	5.6	5.6
30	76	518	5.0	5.1	5.0
25	63	429	4.3	4.4	4.4
20	51	347	3.5	3.6	3.6
15	39	266	2.8	2.9	2.8