

## Photometric test report

**Family**  
**Floodlight 20 mini LED**

**Order number: 5XA7672B1A4AC**  
**EAN: 4058352220771**

**LP number**  
**58552\_8**



**Version** mast flange adapter  
**Optic** asymmetric distribution PL43  
**Cover** toughened safety glass  
**Lamps** 1 x LED 3000K / CRI ≥ 80  
 (unbekannt LED 3000K / CRI = 80)  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 5220 lm  
 Power consumption = 51.0 W  
 Luminous efficacy = 102.4 lm/W

**serial**  
**documentation**  
**25.08.2021**

**siteco**

**Luminous intensity in cd/klm**


**C180-0**

**C230-50**

**C235-55**

**C270-90**

**Imax: 733 cd/klm**

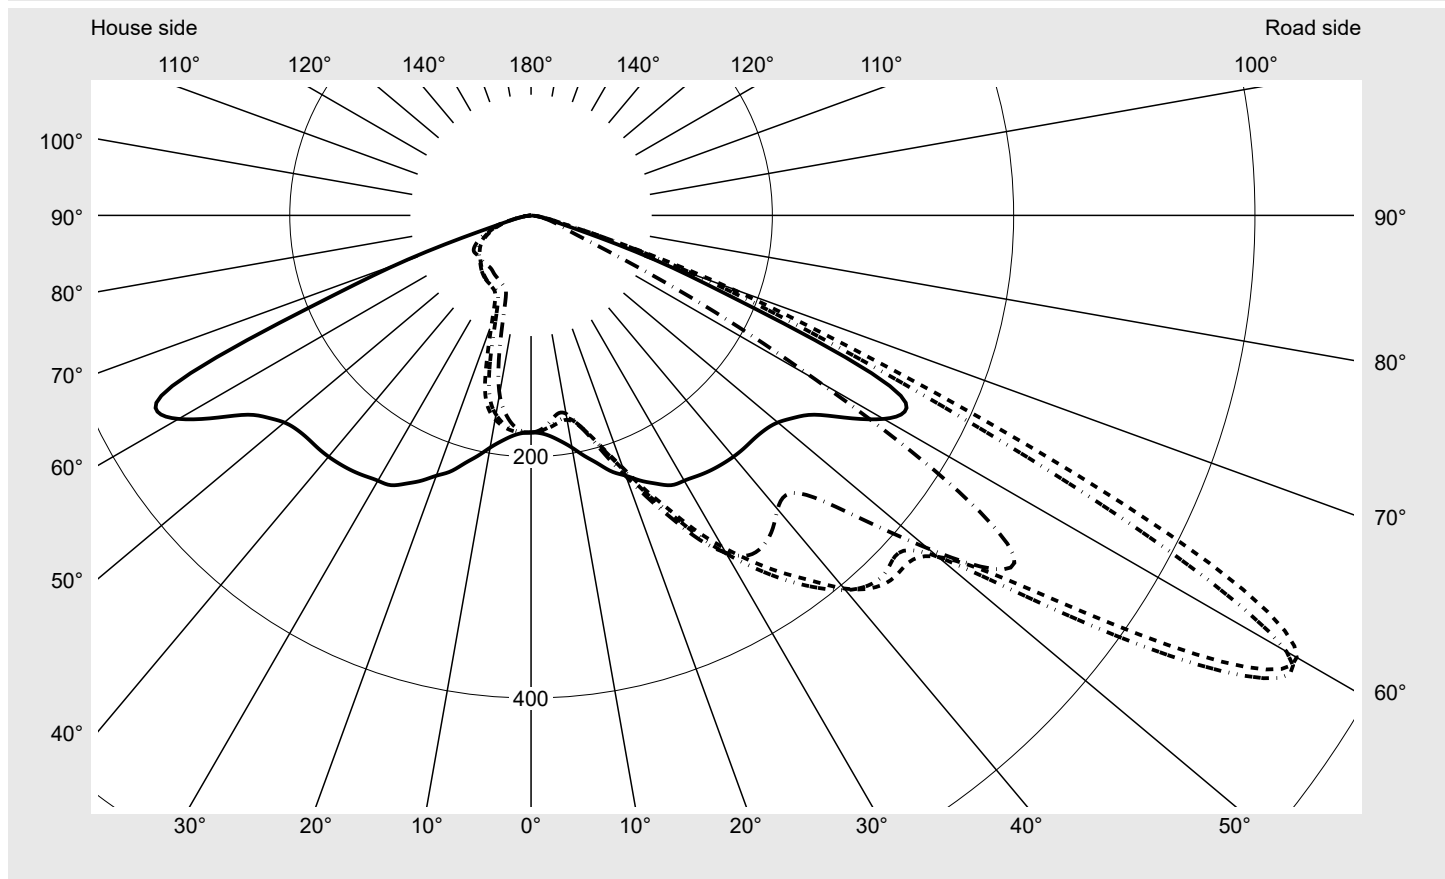

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	250.7
Imax 80°	13.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

### Measurement conditions


DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1A4AC</b> <b>EAN: 4058352220771</b>	<b>LP number</b> <b>58552_8</b>
--	---	------------------------------------



**Envelope curve in cd/klm**      **KMK 60°**      **KMK 57.5°**      **KMK 55°**      **KMK 52.5°**

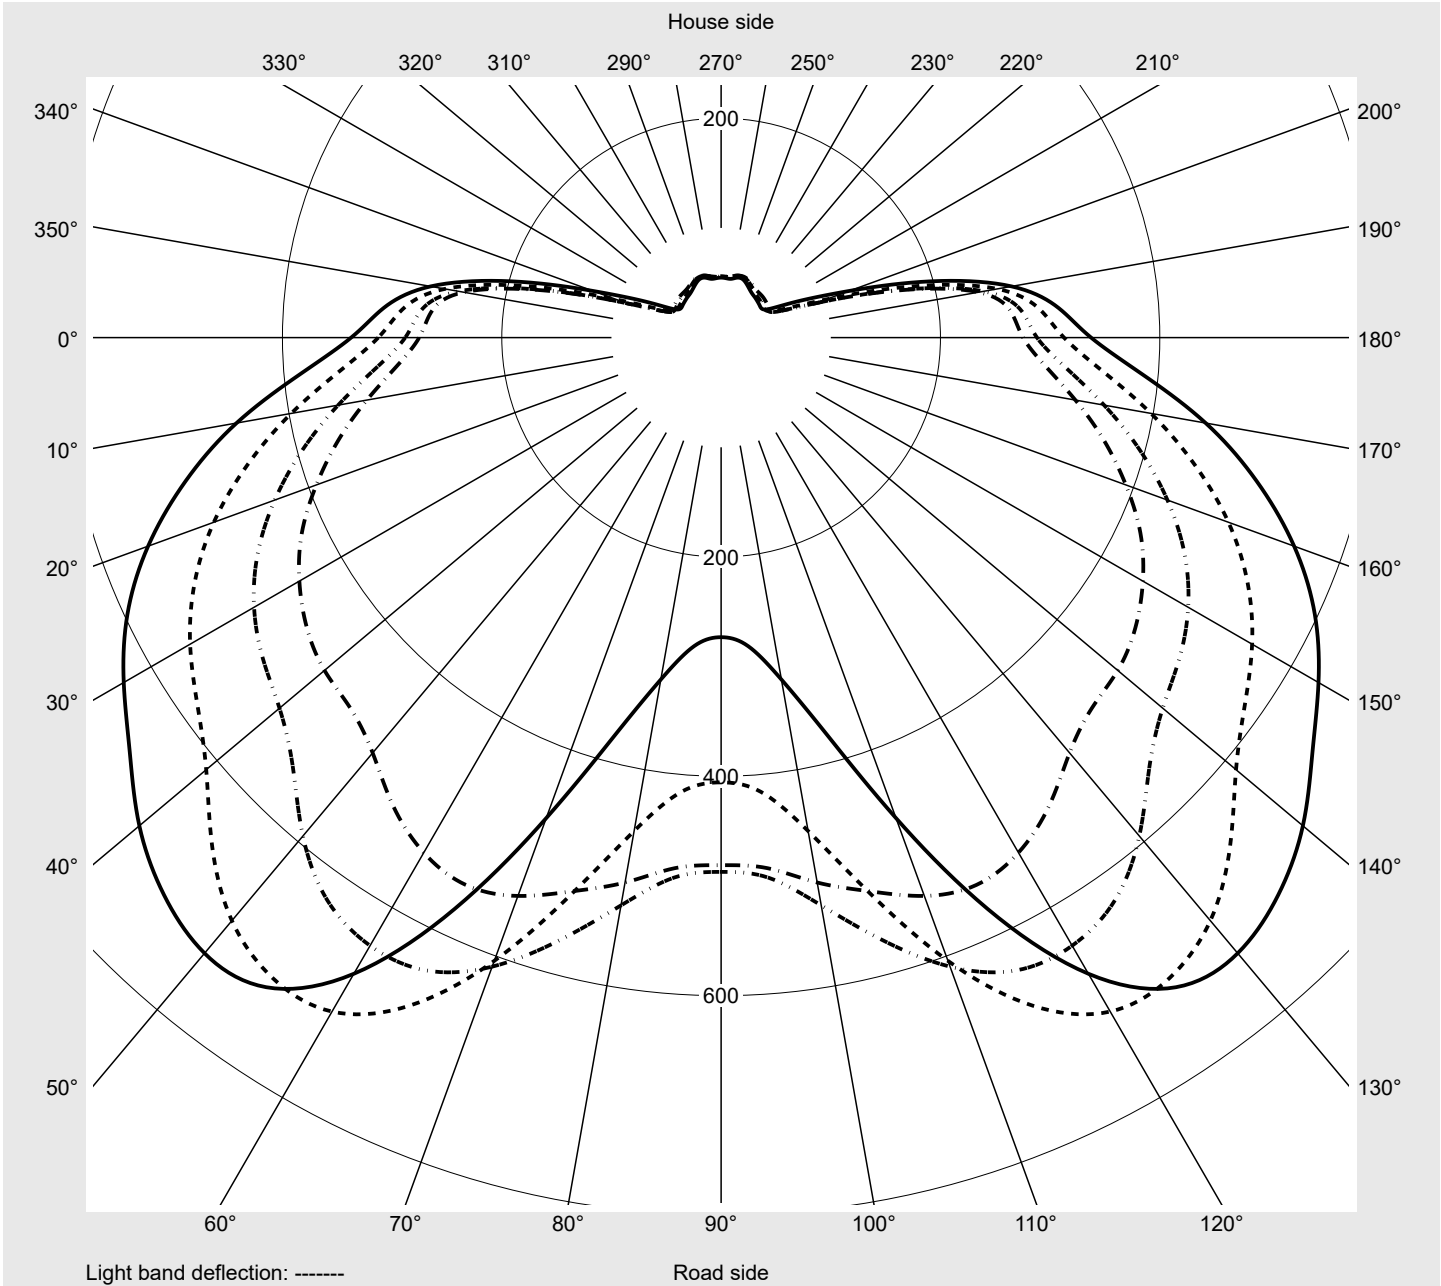

## Photometric test report

<b>Family</b> Floodlight 20 mini LED	<b>Order number: 5XA7672B1A4AC</b> <b>EAN: 4058352220771</b>	<b>LP number</b> 58552_8
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	180.7	180.4	180.3	180.3	180.2	180.2	180.1	179.9	179.6	179.4	179.2	178.9	178.7
5,0°	183.7	183.4	182.9	182.4	181.8	181.2	180.4	179.5	178.5	177.5	176.6	175.7	174.9
7,5°	188.8	188.0	186.9	185.6	184.1	182.6	180.9	179.0	177.0	175.1	173.3	171.8	170.3
10,0°	195.5	194.5	192.6	190.3	187.8	185.1	182.2	179.4	176.6	174.2	172.1	170.5	169.2
12,5°	204.2	202.3	199.5	196.0	192.4	188.8	185.5	182.6	180.2	178.5	177.4	176.7	176.5
15,0°	212.7	210.5	206.6	202.2	198.1	194.5	191.7	189.8	188.7	188.2	188.6	189.0	189.2
17,5°	222.6	218.8	214.2	209.6	205.7	202.9	201.4	201.1	202.0	203.2	204.3	205.5	206.5
20,0°	229.6	226.1	221.4	216.9	213.9	212.6	213.3	215.5	217.8	220.3	222.9	225.1	227.0
22,5°	238.0	233.6	228.9	225.2	223.5	224.4	228.1	232.3	236.6	241.1	245.4	249.1	250.8
25,0°	245.3	242.0	238.0	235.4	235.1	238.8	244.2	250.4	256.6	262.6	267.9	272.3	275.4
27,5°	252.1	248.7	246.0	245.2	248.7	255.8	263.3	271.1	278.8	286.6	293.6	298.6	302.1
30,0°	253.9	252.1	250.7	252.4	259.9	269.9	280.3	290.3	299.9	309.1	317.3	323.8	328.0
32,5°	256.1	255.0	255.6	260.4	271.1	283.3	295.9	308.4	320.0	330.1	339.6	347.2	351.5
35,0°	258.4	258.8	262.3	270.7	283.3	297.5	311.7	325.9	339.5	351.0	361.1	369.2	372.1
37,5°	259.9	262.2	269.2	281.6	295.7	311.3	327.3	343.0	358.0	371.4	381.6	388.9	388.5
40,0°	261.1	265.5	276.9	292.5	308.5	325.7	343.7	361.7	378.1	393.0	403.6	405.4	400.4
42,5°	261.5	268.2	284.0	302.1	321.0	340.5	360.0	379.7	396.9	411.3	418.8	415.4	406.2
45,0°	261.6	270.9	290.5	311.6	332.9	354.4	376.5	396.4	412.8	424.4	424.9	416.8	401.9
47,5°	263.0	275.1	297.2	320.8	344.1	366.4	387.2	405.7	419.4	427.7	425.2	413.8	401.7
50,0°	267.0	283.1	309.3	337.2	363.9	388.2	409.6	426.5	438.2	442.5	440.2	440.2	447.9
52,5°	275.3	296.7	328.0	361.3	392.7	421.9	444.1	461.2	472.1	478.0	494.3	521.3	542.3
55,0°	288.0	315.6	354.6	395.1	433.1	466.3	491.8	510.1	525.7	552.5	593.3	626.2	640.2
57,5°	312.7	349.0	398.0	446.9	492.3	529.8	559.1	583.1	612.9	656.3	694.0	712.9	709.6
60,0°	337.3	385.8	448.7	505.5	556.0	597.4	629.0	658.3	692.5	718.5	732.8	723.1	669.8
62,5°	350.0	407.7	477.2	540.5	593.3	632.6	659.3	681.3	689.2	682.0	654.5	579.5	477.7
65,0°	316.3	376.8	447.1	504.0	548.1	577.7	594.3	595.3	578.0	540.7	466.8	384.3	313.0
67,5°	196.1	254.1	308.0	354.9	392.3	417.5	425.2	415.6	385.9	336.8	287.6	242.8	197.9
70,0°	116.8	142.9	168.8	199.2	226.4	242.1	250.7	246.5	228.8	200.6	173.1	148.7	126.7
72,5°	48.9	42.1	39.5	55.6	105.4	131.8	133.6	125.8	106.5	85.8	80.1	78.5	69.5
75,0°	22.3	19.5	19.2	20.9	34.8	56.7	57.8	50.8	30.9	26.0	32.2	32.5	30.1
77,5°	13.4	12.3	12.2	12.9	16.0	21.6	22.1	17.4	15.3	15.3	17.4	19.0	21.7
80,0°	7.7	7.4	7.7	8.1	8.7	10.2	10.2	9.4	9.7	10.0	10.4	10.9	12.2
82,5°	4.1	4.1	4.3	4.6	4.8	5.1	5.7	5.7	5.9	6.0	6.1	6.0	5.9
85,0°	1.9	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.8	2.8	2.7	2.6	2.4
87,5°	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 mini LED</b>	<b>Order number: 5XA7672B1A4AC</b> <b>EAN: 4058352220771</b>	<b>LP number</b> <b>58552_8</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	178.4	178.2	178.1	178.0	177.9	177.9	180.8	180.8	180.8	180.8	180.7	180.7	180.6
5,0°	174.1	173.4	172.9	172.6	172.5	172.5	184.0	183.9	183.7	183.4	183.0	182.4	181.8
7,5°	169.0	167.8	167.0	166.4	166.1	166.0	189.0	188.8	188.2	187.3	186.2	184.7	182.9
10,0°	168.2	167.4	167.0	166.8	166.9	166.9	196.1	195.7	194.6	192.8	190.4	187.3	183.8
12,5°	176.3	176.2	176.2	176.5	176.6	176.7	204.8	204.3	202.6	199.6	195.5	190.6	184.6
15,0°	189.4	189.4	189.7	190.1	190.5	190.5	214.0	213.3	210.7	206.2	200.3	192.9	184.0
17,5°	207.3	208.0	208.5	209.2	209.8	209.9	223.3	222.1	218.4	212.3	204.0	193.6	180.1
20,0°	228.2	228.8	229.4	229.9	230.3	230.3	231.5	229.8	224.9	217.0	205.7	190.3	166.4
22,5°	252.4	252.9	253.3	253.8	254.0	253.8	239.6	237.7	231.4	220.5	203.7	177.1	144.0
25,0°	276.7	276.9	277.0	277.7	278.0	277.7	247.5	245.1	236.8	222.0	193.8	156.1	119.5
27,5°	303.6	303.1	302.4	303.2	303.6	303.3	253.3	250.0	239.7	217.0	174.8	130.8	95.4
30,0°	328.6	326.1	324.3	324.2	323.9	322.9	255.2	251.2	238.8	203.2	152.9	107.3	78.5
32,5°	350.6	346.3	343.1	340.9	337.1	334.2	257.1	252.7	235.1	186.8	130.3	88.3	69.8
35,0°	368.8	361.3	356.5	350.6	340.0	334.7	258.7	253.5	225.8	166.7	106.8	73.1	65.2
37,5°	380.8	369.5	363.2	351.9	334.9	328.5	259.4	252.9	212.7	146.0	88.0	65.4	62.8
40,0°	387.7	373.0	363.3	343.5	323.9	317.9	259.7	250.3	199.2	127.8	76.1	61.9	60.7
42,5°	390.0	371.4	353.5	331.6	318.1	313.9	259.4	246.9	189.4	115.0	70.4	59.4	58.8
45,0°	384.4	366.9	352.3	340.9	332.2	329.9	258.7	243.2	181.7	105.8	65.8	57.1	57.0
47,5°	396.0	389.7	384.4	380.6	373.9	373.2	258.9	240.0	175.3	100.4	62.3	55.0	55.2
50,0°	458.1	458.1	448.9	441.8	432.1	429.5	260.8	237.4	169.3	94.5	59.2	53.0	53.5
52,5°	550.7	541.8	522.6	504.5	485.6	481.0	265.5	238.4	165.7	91.4	57.0	51.1	51.7
55,0°	636.6	610.4	568.8	525.7	494.3	487.2	275.3	243.2	167.6	91.4	55.9	49.3	49.7
57,5°	672.1	604.8	524.7	456.8	415.8	405.5	292.0	255.8	180.6	101.7	61.0	48.6	47.5
60,0°	574.7	466.3	375.8	316.6	282.4	273.2	309.0	268.9	198.3	124.4	79.5	53.3	45.7
62,5°	381.2	303.5	247.0	203.1	171.1	163.0	313.6	273.2	210.0	145.1	101.0	67.1	46.2
65,0°	254.3	201.4	146.7	98.7	73.7	72.1	277.5	248.6	202.2	149.0	104.6	72.8	50.4
67,5°	162.1	121.9	57.2	40.9	37.9	36.6	147.3	155.0	152.5	128.7	92.2	62.6	49.8
70,0°	105.4	79.1	39.4	31.3	29.5	28.0	47.6	43.2	62.9	70.1	56.8	49.6	43.3
72,5°	55.6	44.1	29.7	23.8	22.1	20.8	26.2	23.8	25.9	32.8	30.3	29.8	29.6
75,0°	29.5	29.7	23.0	18.3	17.0	15.7	18.4	16.6	17.8	20.4	20.1	19.7	19.5
77,5°	24.2	22.5	16.4	13.4	12.2	11.1	13.5	11.8	12.6	13.9	13.6	13.6	13.5
80,0°	13.8	12.7	10.0	9.0	7.9	7.1	7.8	7.7	8.0	8.9	8.9	8.8	8.8
82,5°	5.7	5.7	5.2	4.6	4.1	3.8	4.3	4.4	4.5	4.9	5.2	5.2	5.3
85,0°	2.2	2.0	1.8	1.6	1.5	1.4	2.0	2.0	2.1	2.3	2.4	2.5	2.5
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight 20 mini LED	<b>Order number: 5XA7672B1A4AC</b> <b>EAN: 4058352220771</b>	<b>LP number</b> 58552_8
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	0.3	0.3
2,5°	180.5	180.3	180.0	179.8	179.6	179.4	179.1	178.9	178.7	178.7	178.8	2.1	2.4
5,0°	181.0	180.2	179.2	178.2	177.2	176.4	175.5	174.8	174.4	174.2	174.1	4.3	6.7
7,5°	180.8	178.6	176.4	174.2	172.0	170.0	168.2	166.7	165.6	165.1	164.9	6.3	13.0
10,0°	179.9	175.8	171.6	167.6	163.5	159.9	156.7	153.9	151.9	150.8	150.4	8.4	21.4
12,5°	178.0	171.0	163.7	156.5	149.3	142.5	136.1	130.8	127.0	124.6	123.8	10.4	31.8
15,0°	173.7	161.6	147.6	133.7	121.5	111.6	103.7	97.8	93.7	91.2	90.4	12.4	44.2
17,5°	160.5	139.0	119.5	103.6	91.7	83.3	77.4	73.6	71.1	69.7	69.2	14.5	58.7
20,0°	138.8	114.2	95.2	82.1	74.1	69.9	67.5	66.0	64.9	64.1	63.8	16.8	75.5
22,5°	114.0	92.0	78.5	71.5	68.4	66.7	65.3	64.0	63.0	62.2	61.8	19.5	95.0
25,0°	92.1	76.9	70.6	68.4	67.0	65.7	64.4	63.2	62.0	60.9	60.5	22.3	117.3
27,5°	76.0	69.9	68.2	67.3	66.3	65.3	64.0	62.6	61.2	59.9	59.2	25.3	142.7
30,0°	69.2	67.5	67.0	66.5	66.0	65.1	63.9	62.3	60.7	59.0	58.2	28.3	171.0
32,5°	66.4	65.9	65.9	65.9	65.8	65.1	63.7	62.0	60.1	58.2	57.1	31.3	202.3
35,0°	64.3	64.3	64.7	65.1	65.2	64.7	63.3	61.3	59.2	57.1	55.9	34.1	236.4
37,5°	62.5	62.8	63.3	64.0	64.2	63.9	62.6	60.7	58.6	56.4	55.0	36.8	273.2
40,0°	60.8	61.3	61.9	62.5	63.0	62.9	62.0	60.3	58.3	56.2	54.9	39.3	312.5
42,5°	59.2	59.8	60.2	61.0	61.6	62.1	61.6	60.0	58.1	56.3	55.1	41.7	354.3
45,0°	57.5	58.1	58.5	59.1	60.2	61.3	61.1	59.6	58.0	56.4	55.2	44.2	398.5
47,5°	55.9	56.5	56.7	57.3	58.8	60.4	60.6	59.2	57.6	56.2	55.1	47.2	445.7
50,0°	54.3	54.8	55.0	55.7	57.5	59.4	59.9	58.8	57.0	55.8	55.0	52.3	498.0
52,5°	52.5	53.2	53.5	54.3	56.1	58.3	59.3	58.5	56.9	55.7	55.2	59.5	557.5
55,0°	50.6	51.4	52.0	52.9	54.7	57.4	58.8	58.6	56.7	55.8	55.6	67.2	624.7
57,5°	48.3	49.4	50.2	51.3	53.2	56.2	58.2	58.2	56.1	55.7	56.0	73.8	698.5
60,0°	45.8	46.8	47.9	49.2	51.4	54.4	56.9	56.6	54.4	54.3	54.7	75.4	773.9
62,5°	43.1	43.7	44.7	46.1	48.5	51.4	54.1	53.6	51.5	51.2	51.5	70.8	844.7
65,0°	41.0	40.4	41.3	42.9	45.0	48.1	50.7	50.1	47.7	47.1	47.5	59.6	904.3
67,5°	40.3	36.4	37.3	38.9	41.3	44.1	45.9	44.8	41.9	41.5	42.4	41.3	945.6
70,0°	36.6	32.1	32.9	34.8	37.1	39.4	40.3	38.5	35.5	36.6	37.0	25.2	970.8
72,5°	27.7	26.2	27.5	29.5	31.6	33.3	33.6	30.8	28.6	31.2	32.2	13.1	983.9
75,0°	19.9	20.5	21.9	23.7	25.4	26.8	26.5	23.8	21.8	23.3	24.5	6.9	990.8
77,5°	13.9	14.6	15.4	17.1	18.7	19.9	18.8	16.8	15.2	15.4	15.8	4.3	995.1
80,0°	9.1	9.5	10.1	11.1	12.3	12.9	11.8	10.5	9.4	9.1	8.9	2.6	997.7
82,5°	5.4	5.6	5.9	6.1	6.3	6.2	5.8	5.2	4.7	4.5	4.4	1.4	999.1
85,0°	2.5	2.5	2.6	2.7	2.7	2.7	2.6	2.3	2.1	2.0	2.0	0.6	999.8
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Floodlight 20 mini LED</b>	Order number: <b>5XA7672B1A4AC</b> EAN: <b>4058352220771</b>	LP number <b>58552_8</b>
---	---	-----------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5220	51.0
95	239	252	4959	48.1
90	224	250	4698	45.2
85	211	247	4437	42.4
80	197	245	4176	39.8
75	182	242	3915	37.1
70	169	239	3654	34.5
65	157	236	3393	31.7
60	143	233	3132	29.3
55	130	230	2871	26.8
50	117	226	2610	24.4
45	104	222	2349	22.1
40	93	217	2088	19.7
35	81	212	1827	17.4
30	69	206	1566	15.2
25	57	199	1305	13.0
20	45	191	1044	10.9
15	34	180	782	8.8