

Photometric test report

Family
Floodlight 20 mini LED

Order number: 5XA7672B2A1AC
EAN: 4058352220955

LP number
58552_3



Version mounting bracket
Optic asymmetric distribution PL43
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
(unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 6650 lm
Power consumption = 51.0 W
Luminous efficacy = 130.4 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C230-50

C235-55

C270-90

Imax: 733 cd/klm

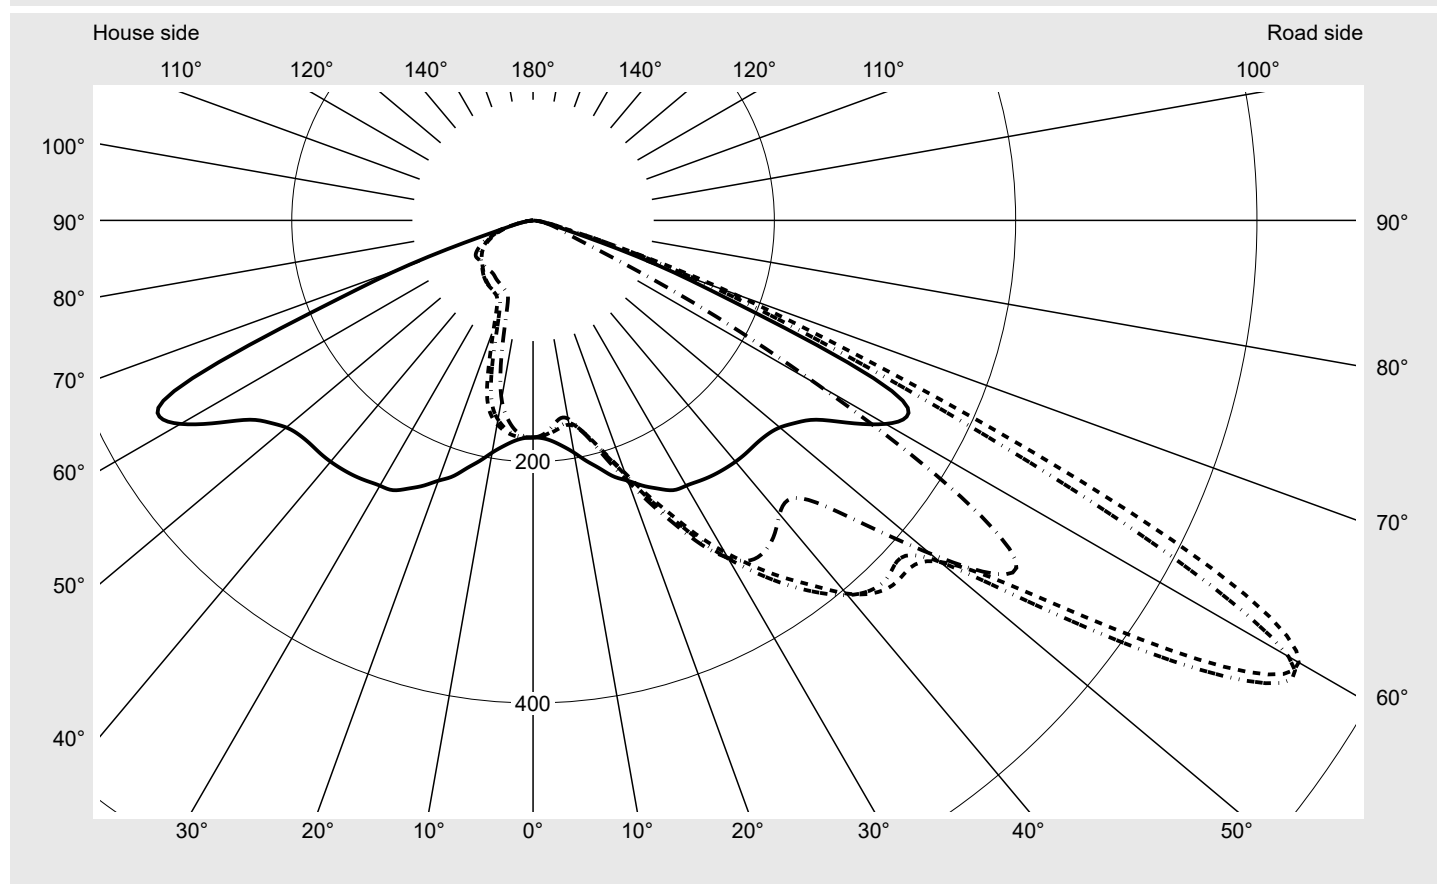

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	250.7
Imax 80°	13.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2A1AC EAN: 4058352220955	LP number 58552_3
--	---	------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

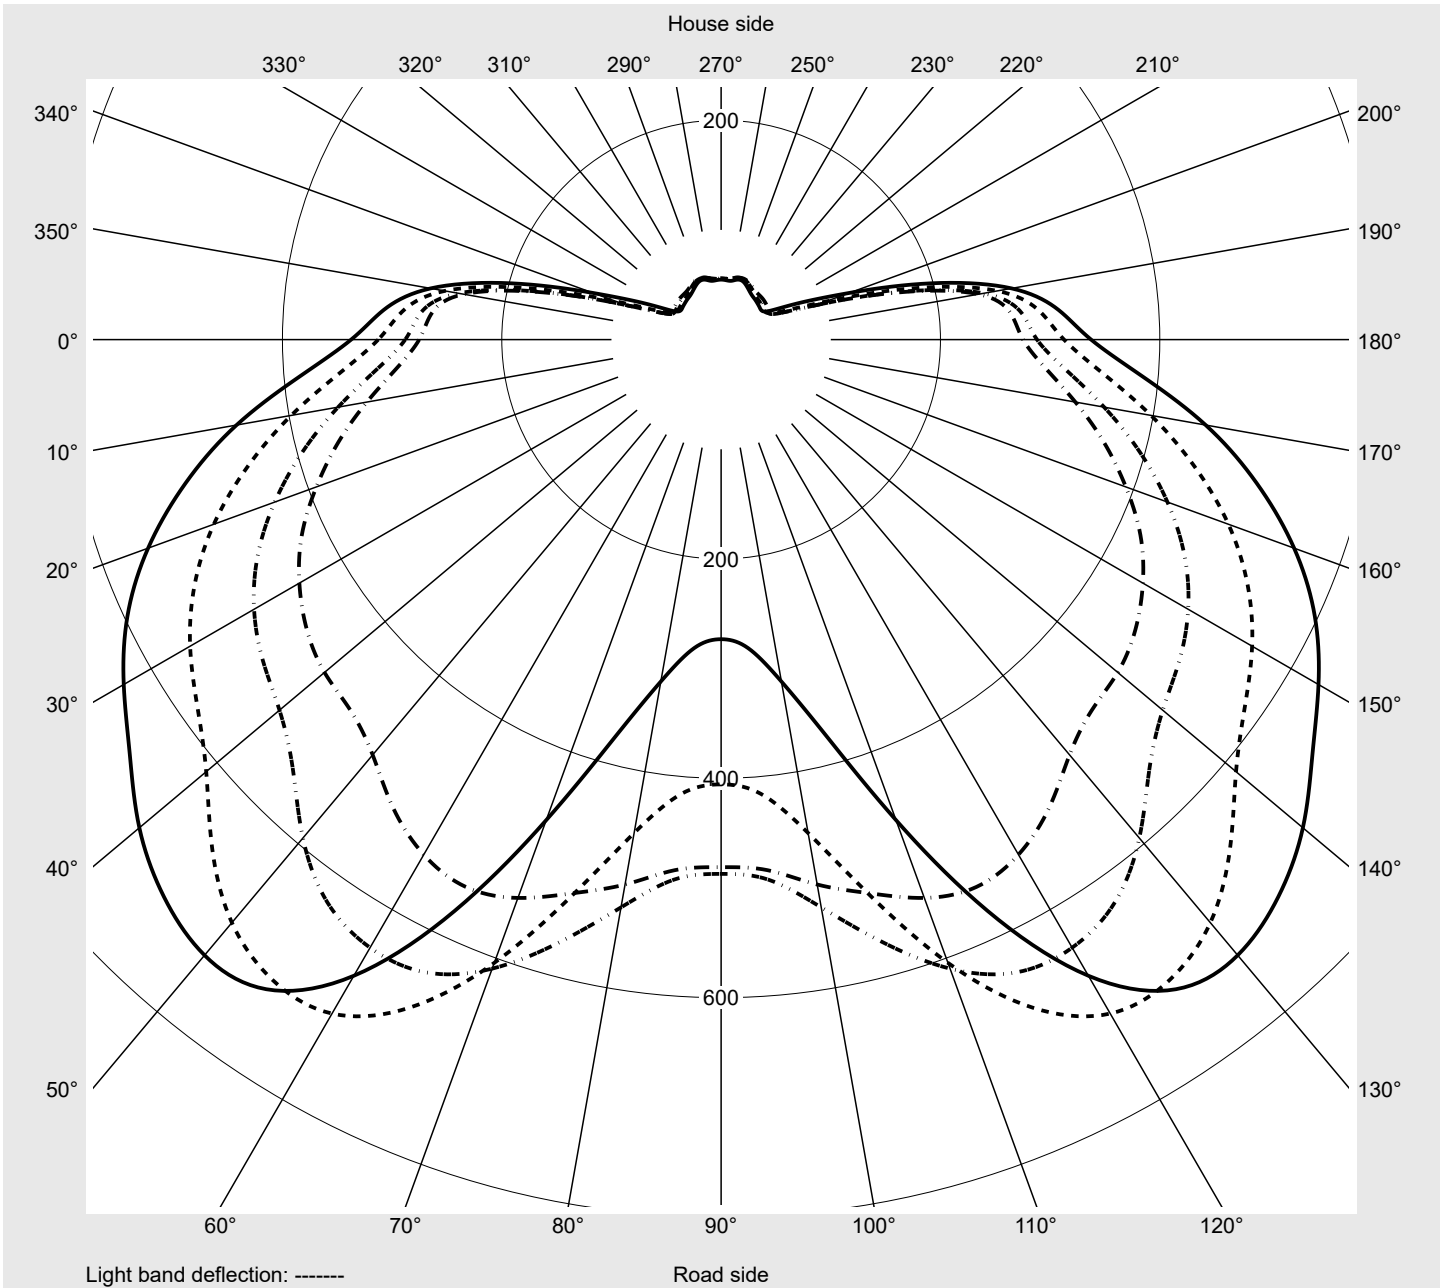

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2A1AC EAN: 4058352220955	LP number 58552_3
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	180.7	180.4	180.3	180.3	180.2	180.2	180.1	179.9	179.6	179.4	179.2	178.9	178.7
5,0°	183.7	183.4	182.9	182.4	181.8	181.2	180.4	179.5	178.5	177.5	176.6	175.7	174.9
7,5°	188.8	188.0	186.9	185.6	184.1	182.6	180.9	179.0	177.0	175.1	173.3	171.8	170.3
10,0°	195.5	194.5	192.6	190.3	187.8	185.1	182.2	179.4	176.6	174.2	172.1	170.5	169.2
12,5°	204.2	202.3	199.5	196.0	192.4	188.8	185.5	182.6	180.2	178.5	177.4	176.7	176.5
15,0°	212.7	210.5	206.6	202.2	198.1	194.5	191.7	189.8	188.7	188.2	188.6	189.0	189.2
17,5°	222.6	218.8	214.2	209.6	205.7	202.9	201.4	201.1	202.0	203.2	204.3	205.5	206.5
20,0°	229.6	226.1	221.4	216.9	213.9	212.6	213.3	215.5	217.8	220.3	222.9	225.1	227.0
22,5°	238.0	233.6	228.9	225.2	223.5	224.4	228.1	232.3	236.6	241.1	245.4	249.1	250.8
25,0°	245.3	242.0	238.0	235.4	235.1	238.8	244.2	250.4	256.6	262.6	267.9	272.3	275.4
27,5°	252.1	248.7	246.0	245.2	248.7	255.8	263.3	271.1	278.8	286.6	293.6	298.6	302.1
30,0°	253.9	252.1	250.7	252.4	259.9	269.9	280.3	290.3	299.9	309.1	317.3	323.8	328.0
32,5°	256.1	255.0	255.6	260.4	271.1	283.3	295.9	308.4	320.0	330.1	339.6	347.2	351.5
35,0°	258.4	258.8	262.3	270.7	283.3	297.5	311.7	325.9	339.5	351.0	361.1	369.2	372.1
37,5°	259.9	262.2	269.2	281.6	295.7	311.3	327.3	343.0	358.0	371.4	381.6	388.9	388.5
40,0°	261.1	265.5	276.9	292.5	308.5	325.7	343.7	361.7	378.1	393.0	403.6	405.4	400.4
42,5°	261.5	268.2	284.0	302.1	321.0	340.5	360.0	379.7	396.9	411.3	418.8	415.4	406.2
45,0°	261.6	270.9	290.5	311.6	332.9	354.4	376.5	396.4	412.8	424.4	424.9	416.8	401.9
47,5°	263.0	275.1	297.2	320.8	344.1	366.4	387.2	405.7	419.4	427.7	425.2	413.8	401.7
50,0°	267.0	283.1	309.3	337.2	363.9	388.2	409.6	426.5	438.2	442.5	440.2	440.2	447.9
52,5°	275.3	296.7	328.0	361.3	392.7	421.9	444.1	461.2	472.1	478.0	494.3	521.3	542.3
55,0°	288.0	315.6	354.6	395.1	433.1	466.3	491.8	510.1	525.7	552.5	593.3	626.2	640.2
57,5°	312.7	349.0	398.0	446.9	492.3	529.8	559.1	583.1	612.9	656.3	694.0	712.9	709.6
60,0°	337.3	385.8	448.7	505.5	556.0	597.4	629.0	658.3	692.5	718.5	732.8	723.1	669.8
62,5°	350.0	407.7	477.2	540.5	593.3	632.6	659.3	681.3	689.2	682.0	654.5	579.5	477.7
65,0°	316.3	376.8	447.1	504.0	548.1	577.7	594.3	595.3	578.0	540.7	466.8	384.3	313.0
67,5°	196.1	254.1	308.0	354.9	392.3	417.5	425.2	415.6	385.9	336.8	287.6	242.8	197.9
70,0°	116.8	142.9	168.8	199.2	226.4	242.1	250.7	246.5	228.8	200.6	173.1	148.7	126.7
72,5°	48.9	42.1	39.5	55.6	105.4	131.8	133.6	125.8	106.5	85.8	80.1	78.5	69.5
75,0°	22.3	19.5	19.2	20.9	34.8	56.7	57.8	50.8	30.9	26.0	32.2	32.5	30.1
77,5°	13.4	12.3	12.2	12.9	16.0	21.6	22.1	17.4	15.3	15.3	17.4	19.0	21.7
80,0°	7.7	7.4	7.7	8.1	8.7	10.2	10.2	9.4	9.7	10.0	10.4	10.9	12.2
82,5°	4.1	4.1	4.3	4.6	4.8	5.1	5.7	5.7	5.9	6.0	6.1	6.0	5.9
85,0°	1.9	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.8	2.8	2.7	2.6	2.4
87,5°	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2A1AC EAN: 4058352220955	LP number 58552_3
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	178.4	178.2	178.1	178.0	177.9	177.9	180.8	180.8	180.8	180.8	180.7	180.7	180.6
5,0°	174.1	173.4	172.9	172.6	172.5	172.5	184.0	183.9	183.7	183.4	183.0	182.4	181.8
7,5°	169.0	167.8	167.0	166.4	166.1	166.0	189.0	188.8	188.2	187.3	186.2	184.7	182.9
10,0°	168.2	167.4	167.0	166.8	166.9	166.9	196.1	195.7	194.6	192.8	190.4	187.3	183.8
12,5°	176.3	176.2	176.2	176.5	176.6	176.7	204.8	204.3	202.6	199.6	195.5	190.6	184.6
15,0°	189.4	189.4	189.7	190.1	190.5	190.5	214.0	213.3	210.7	206.2	200.3	192.9	184.0
17,5°	207.3	208.0	208.5	209.2	209.8	209.9	223.3	222.1	218.4	212.3	204.0	193.6	180.1
20,0°	228.2	228.8	229.4	229.9	230.3	230.3	231.5	229.8	224.9	217.0	205.7	190.3	166.4
22,5°	252.4	252.9	253.3	253.8	254.0	253.8	239.6	237.7	231.4	220.5	203.7	177.1	144.0
25,0°	276.7	276.9	277.0	277.7	278.0	277.7	247.5	245.1	236.8	222.0	193.8	156.1	119.5
27,5°	303.6	303.1	302.4	303.2	303.6	303.3	253.3	250.0	239.7	217.0	174.8	130.8	95.4
30,0°	328.6	326.1	324.3	324.2	323.9	322.9	255.2	251.2	238.8	203.2	152.9	107.3	78.5
32,5°	350.6	346.3	343.1	340.9	337.1	334.2	257.1	252.7	235.1	186.8	130.3	88.3	69.8
35,0°	368.8	361.3	356.5	350.6	340.0	334.7	258.7	253.5	225.8	166.7	106.8	73.1	65.2
37,5°	380.8	369.5	363.2	351.9	334.9	328.5	259.4	252.9	212.7	146.0	88.0	65.4	62.8
40,0°	387.7	373.0	363.3	343.5	323.9	317.9	259.7	250.3	199.2	127.8	76.1	61.9	60.7
42,5°	390.0	371.4	353.5	331.6	318.1	313.9	259.4	246.9	189.4	115.0	70.4	59.4	58.8
45,0°	384.4	366.9	352.3	340.9	332.2	329.9	258.7	243.2	181.7	105.8	65.8	57.1	57.0
47,5°	396.0	389.7	384.4	380.6	373.9	373.2	258.9	240.0	175.3	100.4	62.3	55.0	55.2
50,0°	458.1	458.1	448.9	441.8	432.1	429.5	260.8	237.4	169.3	94.5	59.2	53.0	53.5
52,5°	550.7	541.8	522.6	504.5	485.6	481.0	265.5	238.4	165.7	91.4	57.0	51.1	51.7
55,0°	636.6	610.4	568.8	525.7	494.3	487.2	275.3	243.2	167.6	91.4	55.9	49.3	49.7
57,5°	672.1	604.8	524.7	456.8	415.8	405.5	292.0	255.8	180.6	101.7	61.0	48.6	47.5
60,0°	574.7	466.3	375.8	316.6	282.4	273.2	309.0	268.9	198.3	124.4	79.5	53.3	45.7
62,5°	381.2	303.5	247.0	203.1	171.1	163.0	313.6	273.2	210.0	145.1	101.0	67.1	46.2
65,0°	254.3	201.4	146.7	98.7	73.7	72.1	277.5	248.6	202.2	149.0	104.6	72.8	50.4
67,5°	162.1	121.9	57.2	40.9	37.9	36.6	147.3	155.0	152.5	128.7	92.2	62.6	49.8
70,0°	105.4	79.1	39.4	31.3	29.5	28.0	47.6	43.2	62.9	70.1	56.8	49.6	43.3
72,5°	55.6	44.1	29.7	23.8	22.1	20.8	26.2	23.8	25.9	32.8	30.3	29.8	29.6
75,0°	29.5	29.7	23.0	18.3	17.0	15.7	18.4	16.6	17.8	20.4	20.1	19.7	19.5
77,5°	24.2	22.5	16.4	13.4	12.2	11.1	13.5	11.8	12.6	13.9	13.6	13.6	13.5
80,0°	13.8	12.7	10.0	9.0	7.9	7.1	7.8	7.7	8.0	8.9	8.9	8.8	8.8
82,5°	5.7	5.7	5.2	4.6	4.1	3.8	4.3	4.4	4.5	4.9	5.2	5.2	5.3
85,0°	2.2	2.0	1.8	1.6	1.5	1.4	2.0	2.0	2.1	2.3	2.4	2.5	2.5
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2A1AC EAN: 4058352220955	LP number 58552_3
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	0.3	0.3
2,5°	180.5	180.3	180.0	179.8	179.6	179.4	179.1	178.9	178.7	178.7	178.8	2.1	2.4
5,0°	181.0	180.2	179.2	178.2	177.2	176.4	175.5	174.8	174.4	174.2	174.1	4.3	6.7
7,5°	180.8	178.6	176.4	174.2	172.0	170.0	168.2	166.7	165.6	165.1	164.9	6.3	13.0
10,0°	179.9	175.8	171.6	167.6	163.5	159.9	156.7	153.9	151.9	150.8	150.4	8.4	21.4
12,5°	178.0	171.0	163.7	156.5	149.3	142.5	136.1	130.8	127.0	124.6	123.8	10.4	31.8
15,0°	173.7	161.6	147.6	133.7	121.5	111.6	103.7	97.8	93.7	91.2	90.4	12.4	44.2
17,5°	160.5	139.0	119.5	103.6	91.7	83.3	77.4	73.6	71.1	69.7	69.2	14.5	58.7
20,0°	138.8	114.2	95.2	82.1	74.1	69.9	67.5	66.0	64.9	64.1	63.8	16.8	75.5
22,5°	114.0	92.0	78.5	71.5	68.4	66.7	65.3	64.0	63.0	62.2	61.8	19.5	95.0
25,0°	92.1	76.9	70.6	68.4	67.0	65.7	64.4	63.2	62.0	60.9	60.5	22.3	117.3
27,5°	76.0	69.9	68.2	67.3	66.3	65.3	64.0	62.6	61.2	59.9	59.2	25.3	142.7
30,0°	69.2	67.5	67.0	66.5	66.0	65.1	63.9	62.3	60.7	59.0	58.2	28.3	171.0
32,5°	66.4	65.9	65.9	65.9	65.8	65.1	63.7	62.0	60.1	58.2	57.1	31.3	202.3
35,0°	64.3	64.3	64.7	65.1	65.2	64.7	63.3	61.3	59.2	57.1	55.9	34.1	236.4
37,5°	62.5	62.8	63.3	64.0	64.2	63.9	62.6	60.7	58.6	56.4	55.0	36.8	273.2
40,0°	60.8	61.3	61.9	62.5	63.0	62.9	62.0	60.3	58.3	56.2	54.9	39.3	312.5
42,5°	59.2	59.8	60.2	61.0	61.6	62.1	61.6	60.0	58.1	56.3	55.1	41.7	354.3
45,0°	57.5	58.1	58.5	59.1	60.2	61.3	61.1	59.6	58.0	56.4	55.2	44.2	398.5
47,5°	55.9	56.5	56.7	57.3	58.8	60.4	60.6	59.2	57.6	56.2	55.1	47.2	445.7
50,0°	54.3	54.8	55.0	55.7	57.5	59.4	59.9	58.8	57.0	55.8	55.0	52.3	498.0
52,5°	52.5	53.2	53.5	54.3	56.1	58.3	59.3	58.5	56.9	55.7	55.2	59.5	557.5
55,0°	50.6	51.4	52.0	52.9	54.7	57.4	58.8	58.6	56.7	55.8	55.6	67.2	624.7
57,5°	48.3	49.4	50.2	51.3	53.2	56.2	58.2	58.2	56.1	55.7	56.0	73.8	698.5
60,0°	45.8	46.8	47.9	49.2	51.4	54.4	56.9	56.6	54.4	54.3	54.7	75.4	773.9
62,5°	43.1	43.7	44.7	46.1	48.5	51.4	54.1	53.6	51.5	51.2	51.5	70.8	844.7
65,0°	41.0	40.4	41.3	42.9	45.0	48.1	50.7	50.1	47.7	47.1	47.5	59.6	904.3
67,5°	40.3	36.4	37.3	38.9	41.3	44.1	45.9	44.8	41.9	41.5	42.4	41.3	945.6
70,0°	36.6	32.1	32.9	34.8	37.1	39.4	40.3	38.5	35.5	36.6	37.0	25.2	970.8
72,5°	27.7	26.2	27.5	29.5	31.6	33.3	33.6	30.8	28.6	31.2	32.2	13.1	983.9
75,0°	19.9	20.5	21.9	23.7	25.4	26.8	26.5	23.8	21.8	23.3	24.5	6.9	990.8
77,5°	13.9	14.6	15.4	17.1	18.7	19.9	18.8	16.8	15.2	15.4	15.8	4.3	995.1
80,0°	9.1	9.5	10.1	11.1	12.3	12.9	11.8	10.5	9.4	9.1	8.9	2.6	997.7
82,5°	5.4	5.6	5.9	6.1	6.3	6.2	5.8	5.2	4.7	4.5	4.4	1.4	999.1
85,0°	2.5	2.5	2.6	2.7	2.7	2.7	2.6	2.3	2.1	2.0	2.0	0.6	999.8
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 mini LED	Order number: 5XA7672B2A1AC EAN: 4058352220955	LP number 58552_3
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6650	51.0
95	239	252	6318	48.1
90	224	250	5986	45.2
85	211	247	5653	42.4
80	197	245	5321	39.8
75	182	242	4988	37.1
70	169	239	4656	34.5
65	157	236	4323	31.7
60	143	233	3991	29.3
55	130	230	3658	26.8
50	117	226	3326	24.4
45	104	222	2993	22.1
40	93	217	2660	19.7
35	81	212	2328	17.4
30	69	206	1995	15.2
25	57	199	1663	13.0
20	45	191	1330	10.9
15	34	180	997	8.8