
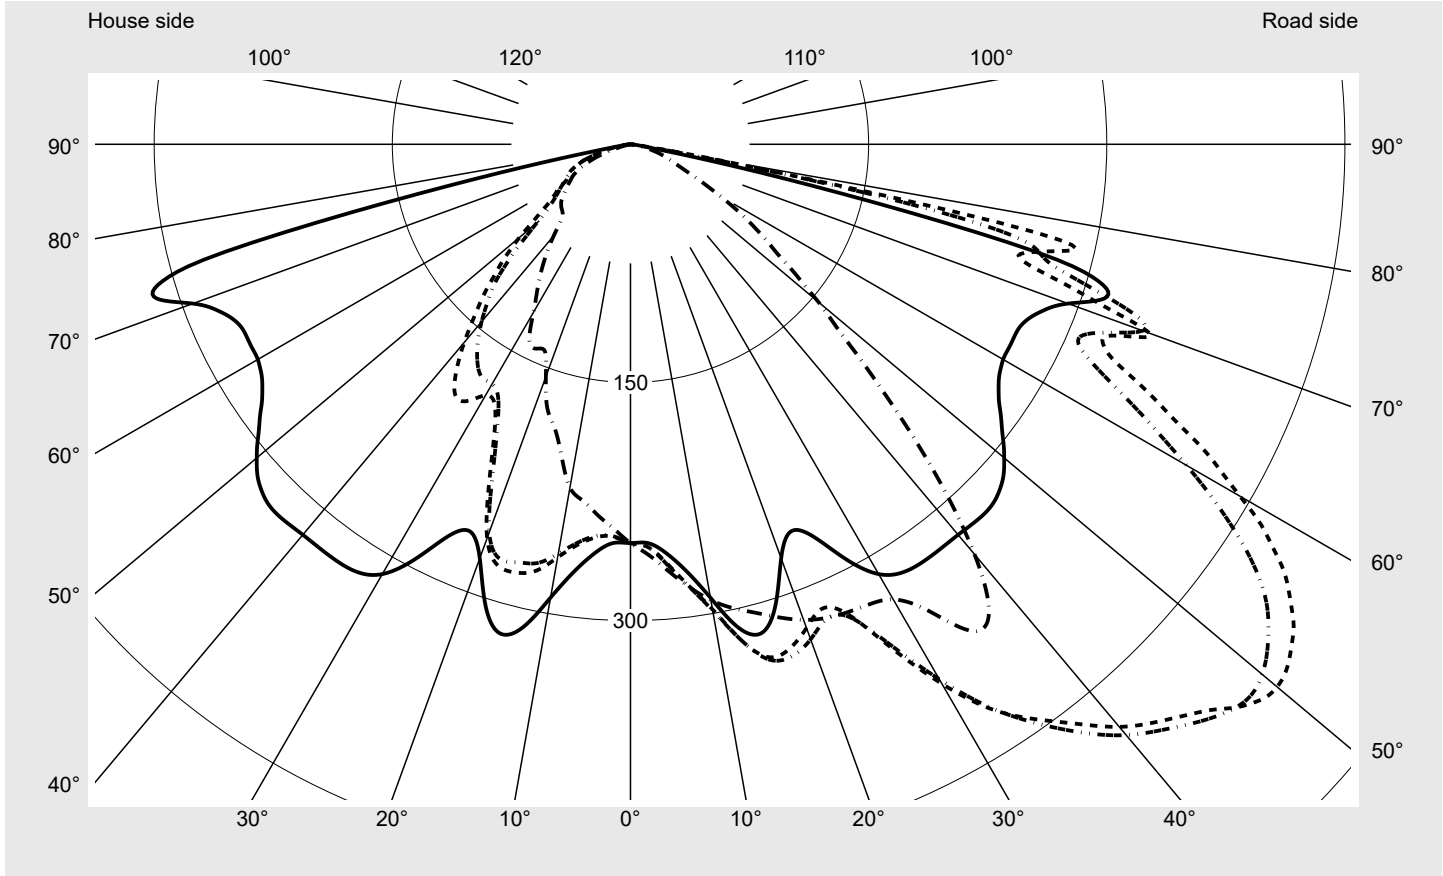


Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST0.5a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG DIM Rated values Net luminous flux = 12830 lm Power consumption = 87.3 W Luminous efficacy = 147 lm/W	serial documentation 23.08.2022



Luminous intensity in cd/klm C180-0 C210-30 C212,5-32,5 C270-90 **Imax: 532 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	466.0
Imax 80°	84.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
---	--	------------------------------



Envelope curve in cd/klm **KMK 50°** **KMK 49°** **KMK 48°** **KMK 47°**

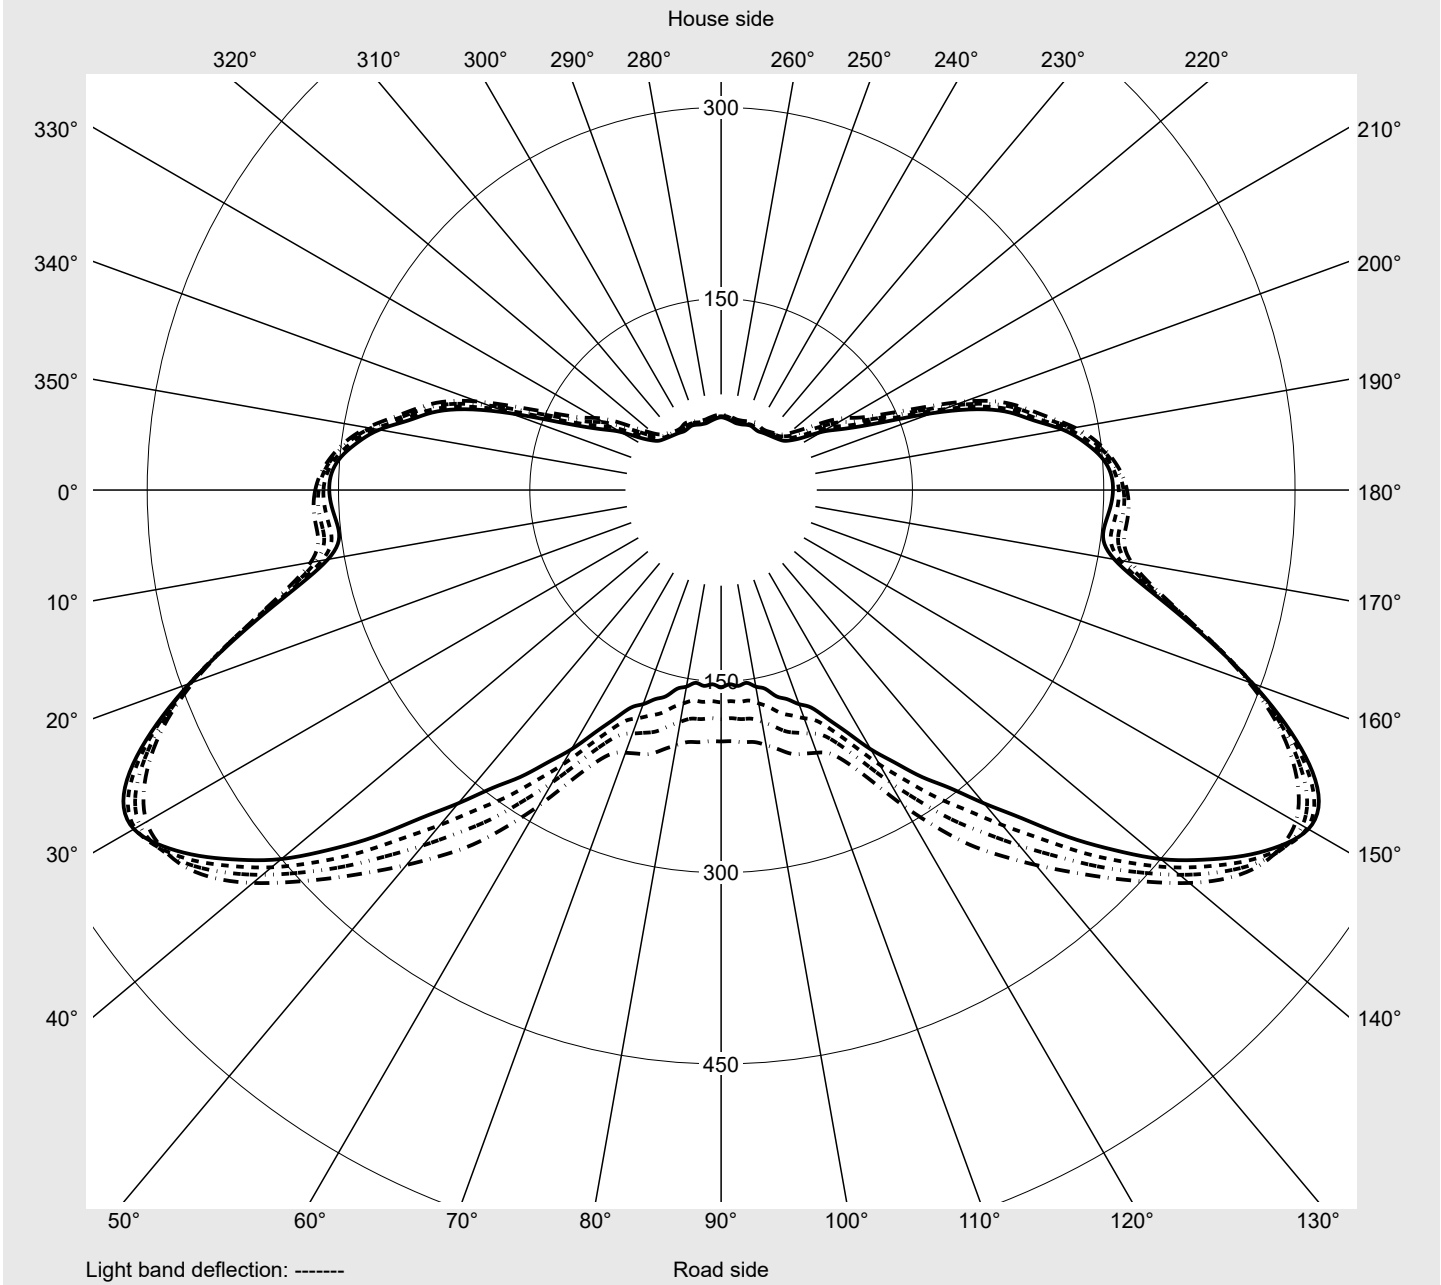

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	251.4	251.6	251.8	252.0	252.2	252.5	252.7	252.9	253.1	253.4	253.5	253.8	254.0	254.1	254.3
5,0°	258.5	259.1	259.9	260.7	261.4	261.9	262.2	262.4	262.9	263.3	263.8	264.5	265.1	265.8	266.0
7,5°	271.3	272.4	273.6	274.3	275.1	275.2	275.8	276.2	277.2	277.8	278.9	279.5	280.4	280.6	281.2
10,0°	290.0	291.7	292.5	293.3	293.3	293.7	293.8	294.8	295.2	296.2	296.6	297.4	297.4	298.3	298.3
12,5°	311.3	313.3	313.5	314.3	313.7	314.5	314.5	316.0	316.4	317.8	318.0	319.1	319.2	319.3	319.7
15,0°	318.8	319.0	318.7	318.1	317.6	318.1	319.4	321.2	323.3	325.6	328.2	331.2	334.4	335.9	338.6
17,5°	304.0	303.9	303.0	302.2	302.2	303.6	305.8	308.9	312.5	317.0	321.9	327.5	333.1	338.1	342.9
20,0°	277.5	279.5	278.2	279.7	280.3	283.9	286.4	291.6	295.9	303.0	309.1	317.6	324.2	331.8	337.5
22,5°	264.0	267.6	270.2	273.0	276.7	280.1	284.1	288.4	294.0	299.7	305.5	311.0	316.4	323.3	328.1
25,0°	272.6	278.4	284.8	289.0	294.6	297.4	303.0	307.0	314.1	318.1	323.3	324.9	327.7	329.1	329.6
27,5°	295.0	303.0	310.2	315.7	320.4	324.5	330.3	337.3	345.3	352.0	357.0	359.1	358.7	356.0	352.1
30,0°	312.6	321.6	329.3	334.8	339.7	345.3	353.5	363.4	374.5	384.0	390.8	393.4	392.3	389.1	384.2
32,5°	319.6	328.7	336.2	341.5	346.5	353.7	364.6	378.0	392.2	404.9	414.2	419.5	421.4	420.1	417.0
35,0°	321.1	329.9	336.8	341.5	346.4	355.1	368.4	384.8	401.8	417.0	428.5	436.4	441.7	445.0	445.9
37,5°	321.0	329.2	335.1	339.0	344.3	354.7	370.4	388.9	408.1	425.7	439.8	450.7	459.9	467.0	470.9
40,0°	321.1	328.1	332.6	335.4	341.2	353.8	371.8	392.6	413.9	433.7	451.2	466.8	479.0	485.8	489.2
42,5°	322.0	327.4	330.2	331.7	338.2	353.2	373.9	397.4	421.9	445.7	466.4	482.2	493.0	499.6	503.4
45,0°	321.7	325.2	325.9	326.2	333.4	350.6	374.7	402.9	432.6	459.9	481.2	496.2	506.0	512.5	514.5
46,0°	320.4	323.0	322.9	323.1	330.8	348.8	374.6	404.9	436.7	465.0	486.8	502.2	512.4	517.0	515.5
47,0°	318.3	319.8	318.9	318.7	326.8	346.0	374.0	406.7	440.3	469.9	493.1	510.3	520.3	520.6	514.2
48,0°	315.5	316.1	314.3	314.0	322.6	343.2	373.1	407.5	442.4	473.6	498.8	517.8	526.3	522.6	510.9
49,0°	311.8	311.1	308.7	308.2	317.7	339.8	371.5	407.1	443.4	476.8	504.5	524.3	530.6	522.1	506.0
50,0°	307.3	305.5	302.3	302.4	313.1	336.8	369.4	405.8	443.5	478.7	508.9	528.4	531.7	519.4	500.0
51,0°	302.6	299.8	296.4	297.2	309.2	334.1	367.1	403.9	442.8	480.1	511.8	530.6	530.3	515.2	493.5
52,0°	297.4	293.5	290.1	292.2	305.7	331.6	365.0	402.3	442.5	481.8	514.3	530.3	526.6	509.6	486.2
53,0°	292.7	288.2	284.9	288.3	303.2	330.1	363.8	401.8	443.4	483.8	515.5	527.9	521.7	503.1	477.1
54,0°	288.2	283.2	280.2	285.0	301.4	329.2	363.5	402.6	445.7	486.4	515.8	524.7	516.4	495.7	465.9
55,0°	283.4	278.2	275.8	282.2	300.2	329.3	364.6	405.4	449.7	489.9	514.5	518.9	508.3	485.8	451.7
56,0°	279.7	274.5	272.9	280.7	300.1	330.3	366.8	409.4	454.6	493.0	512.5	512.6	499.7	473.3	435.0
57,0°	276.5	271.6	271.0	280.2	300.9	332.6	370.0	415.0	460.3	495.6	510.2	504.8	489.8	458.4	417.8
58,0°	274.0	269.6	269.9	280.6	302.6	335.7	375.0	421.7	467.1	497.5	505.6	496.5	476.1	441.5	399.8
59,0°	272.3	268.4	269.7	281.8	305.1	339.6	380.6	429.2	473.6	498.4	500.6	486.7	462.3	423.6	381.6
60,0°	271.0	267.7	270.0	283.5	308.5	345.4	389.0	439.3	480.2	497.4	492.4	473.1	443.3	404.4	363.7
61,0°	270.6	267.5	270.6	285.5	312.1	351.4	397.6	448.8	485.1	494.7	483.7	459.2	425.6	385.0	346.3
62,0°	270.6	267.6	271.4	287.9	316.3	358.2	407.0	458.0	489.0	491.0	474.6	445.2	408.3	366.8	330.9
63,0°	270.5	267.9	273.2	291.1	321.6	366.4	418.0	467.2	490.5	484.2	462.0	427.4	386.7	348.6	316.4
64,0°	270.4	268.7	275.7	295.6	327.7	374.6	428.6	473.9	489.8	477.0	449.7	410.9	368.6	331.5	304.6
65,0°	271.0	270.8	279.3	302.0	335.3	384.9	439.6	479.8	487.1	467.0	436.2	391.2	350.1	317.6	297.1
66,0°	272.9	273.8	284.7	309.3	344.5	395.6	449.6	482.9	481.7	457.1	420.5	374.1	332.4	308.9	295.5
67,0°	275.8	277.6	290.5	317.8	353.5	405.6	457.2	482.8	475.7	446.4	406.8	361.1	323.7	308.7	303.1
68,0°	280.0	283.6	299.2	329.0	364.2	415.9	463.1	478.8	466.2	433.5	393.9	353.0	322.9	317.1	320.0
69,0°	285.2	290.3	309.4	341.5	376.0	425.6	465.8	471.9	453.2	418.4	384.3	356.2	337.9	331.0	338.2
70,0°	293.3	300.8	322.8	358.3	390.0	435.5	466.0	461.7	438.8	394.0	359.3	335.9	348.2	343.3	350.0
71,0°	304.7	313.5	340.2	376.2	407.0	443.9	462.4	451.1	422.5	374.2	327.5	302.7	319.0	340.6	352.8
72,0°	314.0	325.0	356.5	392.8	420.5	448.6	456.5	440.5	406.8	354.4	302.6	275.3	291.8	320.9	339.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
Table of values for luminous intensities		Maximum luminous intensity

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	254.5	255.2	255.3	255.7	256.0	256.3	256.5	256.6	256.8	257.1	257.2	257.4	257.6	257.9	258.1
5,0°	266.8	266.8	267.7	267.7	268.1	268.3	268.3	269.0	268.7	269.2	269.1	269.1	269.6	269.3	269.8
7,5°	281.5	281.9	282.2	282.3	282.5	282.3	282.6	282.4	282.6	282.3	282.3	282.2	282.1	282.1	281.8
10,0°	299.0	299.0	299.4	299.2	299.3	299.1	298.9	298.6	297.9	297.4	296.6	296.2	295.4	295.0	294.2
12,5°	320.1	320.4	320.2	320.1	319.1	318.7	316.9	316.2	313.9	313.0	310.8	309.6	307.6	306.3	304.8
15,0°	340.5	342.3	342.5	342.7	341.0	339.6	336.2	333.6	329.9	327.1	324.0	321.5	318.9	316.6	314.3
17,5°	347.6	351.7	355.2	357.7	358.7	358.2	355.7	352.1	347.1	341.9	336.9	332.7	329.1	326.0	323.3
20,0°	344.0	349.0	354.3	358.3	362.0	364.4	365.8	365.4	362.8	358.1	352.0	345.7	340.3	336.0	332.6
22,5°	333.1	337.7	342.8	347.5	352.4	356.8	361.0	364.1	366.0	365.5	362.5	356.9	350.4	344.3	339.5
25,0°	329.4	330.1	331.6	334.3	338.1	342.8	348.1	353.2	358.0	362.0	364.1	363.2	359.0	352.4	345.9
27,5°	347.1	342.4	337.9	334.9	333.7	335.2	339.0	344.3	350.0	355.4	359.9	362.5	362.1	357.5	350.6
30,0°	377.6	370.2	362.4	355.6	350.3	346.8	345.3	346.0	348.8	352.7	356.7	360.3	362.3	360.7	355.3
32,5°	412.1	406.0	399.9	393.2	385.5	376.4	368.0	361.2	357.4	356.7	358.4	361.6	365.2	367.2	365.5
35,0°	445.2	443.0	439.0	431.9	422.2	410.4	397.9	385.7	375.9	369.9	368.9	371.8	377.7	383.7	387.2
37,5°	472.4	471.4	467.7	461.4	453.1	442.5	429.5	414.4	399.0	386.7	380.4	380.7	385.1	390.8	393.5
40,0°	490.9	490.6	487.8	482.0	472.7	459.3	442.4	423.2	402.3	384.3	371.8	367.6	367.3	369.0	367.2
42,5°	504.6	501.5	492.9	479.9	462.7	443.9	422.9	403.6	384.1	366.5	349.1	336.5	326.0	321.7	315.5
45,0°	509.3	495.9	476.2	454.4	432.2	412.0	393.9	376.2	354.9	330.8	303.3	280.0	264.2	258.0	254.7
46,0°	506.0	488.6	465.7	442.2	419.6	399.4	380.0	359.9	335.5	308.8	279.8	256.5	242.0	236.8	234.7
47,0°	500.0	479.3	454.7	430.1	406.2	383.7	361.6	339.3	312.9	285.7	258.2	237.0	223.7	219.2	216.7
48,0°	492.2	469.3	443.6	417.2	389.6	363.9	338.8	315.4	289.2	264.4	240.1	220.7	208.0	203.1	199.5
49,0°	484.2	460.2	432.1	402.5	370.7	342.8	316.4	294.0	270.2	248.6	226.6	208.7	195.9	190.4	185.4
50,0°	476.1	450.1	417.7	384.5	349.1	320.7	294.4	274.7	253.3	234.8	214.4	198.1	184.6	178.7	171.9
51,0°	467.8	437.8	401.4	364.5	328.5	299.9	276.0	257.4	239.3	222.4	204.3	188.2	175.0	167.5	160.2
52,0°	457.4	423.0	383.1	344.8	309.6	282.2	260.0	243.2	227.2	212.1	195.3	179.8	166.7	158.1	149.7
53,0°	443.8	405.3	363.8	325.7	291.9	265.9	245.7	230.6	216.0	202.5	187.0	172.3	159.0	149.4	140.7
54,0°	428.1	387.1	345.8	309.3	277.5	253.4	234.8	220.4	207.1	195.0	180.9	166.7	153.5	143.0	133.9
55,0°	410.0	368.3	328.4	294.2	265.3	243.1	225.4	211.9	199.8	188.7	175.6	161.9	148.8	138.0	128.2
56,0°	391.1	349.9	312.1	281.0	255.2	234.3	217.6	204.9	193.5	182.9	170.4	157.5	145.2	134.1	122.3
57,0°	373.4	333.9	298.4	271.2	247.6	228.4	212.3	199.8	188.0	177.6	165.5	153.2	138.6	125.2	112.7
58,0°	356.4	319.3	287.3	263.4	241.9	224.0	207.9	195.1	182.2	171.2	157.6	144.2	126.7	114.4	101.8
59,0°	340.7	306.5	278.8	257.3	238.1	220.4	204.2	190.2	175.6	161.9	146.1	131.3	116.0	104.2	93.4
60,0°	325.9	296.1	272.2	253.2	235.7	217.9	200.6	184.6	166.5	150.4	134.5	120.6	106.1	94.9	84.6
61,0°	312.5	287.5	267.4	250.8	234.2	215.9	196.6	177.2	155.5	138.2	122.5	108.9	95.1	84.8	75.4
62,0°	302.1	281.5	265.0	250.0	233.6	214.3	191.9	168.6	144.8	126.9	111.2	98.0	84.9	75.4	67.0
63,0°	293.6	277.8	264.6	250.2	233.1	211.9	185.6	158.6	133.4	115.1	99.6	86.9	74.9	66.3	59.0
64,0°	287.9	276.4	265.7	251.2	232.0	207.6	177.0	147.1	120.7	102.2	86.8	75.0	64.4	57.1	51.1
65,0°	286.2	278.1	268.2	252.3	229.3	200.7	166.8	135.7	108.3	90.0	74.9	64.5	55.2	49.5	44.7
66,0°	290.2	283.6	272.4	252.8	224.6	191.8	155.1	123.5	95.1	77.8	63.3	54.9	46.9	43.1	38.8
67,0°	303.0	294.6	277.9	251.9	218.0	181.4	143.6	110.6	82.9	66.0	54.1	46.7	40.6	37.4	34.6
68,0°	323.3	310.3	284.7	249.4	208.9	169.9	131.3	98.3	71.0	56.0	46.4	40.5	35.8	33.6	31.4
69,0°	341.6	325.4	290.9	245.8	198.9	157.2	118.2	85.5	59.7	47.2	40.0	35.7	32.1	30.5	28.7
70,0°	351.0	334.0	294.4	242.7	190.7	145.5	105.0	74.1	51.0	40.4	35.4	32.6	29.9	28.5	27.0
71,0°	353.1	334.3	293.7	239.1	183.2	133.0	91.3	63.9	43.1	35.1	31.9	30.2	28.2	27.2	25.7
72,0°	340.8	321.4	280.1	228.4	172.1	118.6	79.0	54.3	37.2	30.9	29.1	27.8	26.6	25.8	24.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
--	--	-------------------------------------



Table of values for luminous intensities **Maximum luminous intensity**

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	258.3	258.5	258.7	258.7	258.8	258.8	258.8	251.1	250.9	250.6	250.3	250.0	249.7	249.4	248.9
5,0°	269.8	269.6	270.1	269.6	269.8	270.0	269.5	258.0	257.4	256.9	256.1	255.3	254.3	253.5	252.5
7,5°	281.9	281.5	281.5	281.3	281.2	281.3	281.0	270.1	269.2	268.1	267.0	265.5	264.1	262.5	261.0
10,0°	293.6	292.9	292.4	292.1	291.8	291.7	291.5	288.5	286.7	285.2	283.2	281.4	278.9	276.7	274.1
12,5°	303.5	302.3	301.1	300.5	299.8	299.7	299.3	310.0	307.5	305.8	303.1	300.8	297.4	294.4	290.7
15,0°	312.2	310.3	308.6	307.3	306.3	305.8	305.5	318.1	317.0	315.8	314.3	312.5	309.9	306.7	302.7
17,5°	320.8	318.7	316.6	314.9	313.6	312.9	312.5	303.9	303.5	303.6	303.7	303.7	302.7	301.1	298.0
20,0°	329.5	326.9	324.3	322.1	320.3	319.2	318.7	277.4	274.6	275.3	273.9	276.0	274.8	276.0	271.7
22,5°	335.5	332.4	329.5	327.1	324.9	323.4	322.8	259.3	253.9	250.2	247.3	246.9	246.2	244.7	241.5
25,0°	340.5	336.3	332.8	329.9	327.4	325.7	325.0	263.5	254.7	246.2	239.8	235.5	230.5	225.4	223.6
27,5°	343.8	338.2	333.8	330.7	328.5	327.0	326.5	284.7	273.6	263.2	254.7	247.3	238.2	232.0	227.2
30,0°	348.2	341.9	337.0	334.0	332.2	331.4	331.0	301.9	290.7	280.5	272.3	262.9	254.7	248.5	238.0
32,5°	360.2	355.8	351.6	349.9	348.4	348.6	347.9	309.7	300.0	291.5	283.5	274.8	268.8	260.6	246.0
35,0°	385.1	381.9	377.7	375.5	374.1	374.5	374.1	312.0	303.8	297.0	288.8	281.7	275.4	263.4	249.1
37,5°	390.5	383.7	377.4	372.6	370.8	370.4	370.9	312.5	305.2	298.7	290.6	283.5	273.8	259.9	247.4
40,0°	362.2	352.4	345.4	339.0	337.3	335.9	337.1	313.2	306.3	298.9	290.6	281.8	268.4	254.3	243.0
42,5°	311.2	301.1	295.9	289.7	289.1	286.7	288.6	315.1	308.1	299.4	289.1	277.2	261.4	248.0	235.0
45,0°	252.5	246.7	242.1	237.9	236.9	235.4	235.5	316.0	308.4	298.9	285.9	270.6	254.2	239.7	220.5
46,0°	232.6	227.0	222.0	217.8	216.9	215.4	215.4	315.3	307.7	297.9	284.1	267.2	250.8	235.2	212.3
47,0°	214.1	208.2	203.1	199.3	198.5	197.1	197.1	313.9	306.4	296.1	281.7	263.4	247.1	229.7	202.8
48,0°	195.9	189.6	184.6	180.8	180.3	179.0	179.6	312.0	304.7	293.9	279.1	259.8	243.5	224.0	193.7
49,0°	181.0	174.4	169.8	166.5	166.7	165.7	166.4	309.1	302.3	291.0	276.0	255.8	239.3	217.5	184.7
50,0°	167.4	159.6	156.5	152.5	154.1	152.4	154.5	305.7	299.1	287.3	272.2	251.6	234.7	210.7	176.2
51,0°	153.5	146.0	142.0	139.4	140.5	140.4	140.9	301.9	295.3	283.0	268.0	247.0	229.5	203.9	168.4
52,0°	141.1	133.1	130.1	128.6	130.1	129.9	130.2	297.6	291.0	277.8	262.7	241.6	223.6	196.8	161.0
53,0°	130.9	122.6	119.8	118.1	119.2	118.6	118.5	293.3	286.5	272.0	255.9	235.2	217.1	190.0	154.2
54,0°	123.7	115.2	111.8	110.1	110.8	110.1	110.2	289.1	281.9	266.2	248.3	227.2	208.9	182.0	147.2
55,0°	118.0	109.8	105.9	103.8	104.2	103.2	103.2	284.5	277.0	260.5	241.3	219.3	199.2	172.0	139.0
56,0°	110.9	102.4	98.4	96.7	96.8	95.7	95.4	280.7	272.7	255.6	235.4	213.0	191.1	161.6	128.9
57,0°	102.6	95.2	91.9	90.2	90.1	88.6	88.5	277.2	268.6	250.5	229.7	206.7	183.9	152.1	118.2
58,0°	94.4	87.5	85.0	82.7	83.0	80.3	81.0	274.4	265.0	246.0	224.3	200.7	176.7	144.3	109.6
59,0°	86.1	79.9	77.1	75.6	75.1	72.8	73.0	272.3	261.9	241.7	219.4	195.0	169.8	136.9	102.7
60,0°	78.0	72.0	69.8	68.6	68.0	65.4	65.6	270.6	259.0	237.5	214.4	189.3	162.7	129.3	96.0
61,0°	69.3	63.9	62.0	61.1	60.2	57.8	58.0	269.8	257.2	234.3	210.2	184.0	156.4	122.6	89.9
62,0°	61.6	56.8	55.4	54.7	53.6	51.4	51.7	269.3	255.6	231.4	205.7	178.1	149.7	115.9	84.1
63,0°	54.4	50.5	49.5	48.9	47.5	45.9	45.9	268.5	253.0	227.3	198.8	168.6	139.9	107.9	78.4
64,0°	47.4	44.3	43.7	43.0	41.7	40.3	40.4	267.9	249.9	221.4	188.2	152.7	123.7	95.7	72.6
65,0°	41.9	39.5	39.2	38.4	37.5	36.1	36.2	268.2	247.1	214.7	175.8	132.6	102.0	78.9	64.7
66,0°	37.2	35.1	35.5	34.5	34.0	32.5	33.0	269.3	245.8	209.9	164.1	114.6	81.9	65.2	55.6
67,0°	33.3	32.3	32.4	31.8	30.8	29.9	30.0	271.6	246.3	206.5	154.8	100.7	68.8	55.9	48.4
68,0°	30.5	29.9	30.1	29.3	28.5	27.8	27.9	275.4	248.4	203.4	145.5	89.3	61.2	50.5	43.3
69,0°	28.2	27.7	27.6	26.7	26.1	25.6	25.7	281.3	252.5	201.3	137.0	80.0	57.0	47.2	40.0
70,0°	26.4	25.7	25.2	24.4	23.9	23.6	23.8	290.6	259.0	199.5	127.7	71.5	53.8	44.0	37.1
71,0°	24.8	23.6	23.0	22.1	21.8	21.3	21.7	302.4	269.3	198.6	117.5	65.4	51.1	41.1	34.1
72,0°	23.1	21.9	21.0	20.1	19.6	19.3	19.7	312.8	278.4	195.4	107.3	62.3	49.3	38.5	31.3

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
---	--	------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	248.5	248.2	247.7	247.4	247.1	246.6	246.4	246.0	245.7	245.4	245.0	244.8	244.4	244.0	243.8
5,0°	251.7	250.7	249.4	248.5	247.6	246.7	245.8	245.0	244.1	243.3	242.5	241.7	240.8	240.1	239.3
7,5°	259.4	257.8	255.9	254.4	253.0	251.4	249.9	248.4	246.9	245.4	244.0	242.7	241.2	239.8	238.3
10,0°	272.0	269.3	267.0	264.2	261.8	259.2	256.8	254.2	251.0	247.7	244.3	241.3	238.7	236.2	234.2
12,5°	287.1	283.0	278.9	275.2	270.1	264.7	259.6	255.2	251.4	248.2	245.3	242.3	239.3	235.6	232.1
15,0°	298.1	292.7	286.2	279.2	272.6	267.4	262.6	258.4	253.5	247.2	240.8	233.4	227.0	220.2	214.8
17,5°	293.5	287.2	281.6	278.1	273.7	268.4	260.8	251.8	242.2	232.8	224.7	217.7	212.0	206.8	202.2
20,0°	269.2	265.6	265.8	264.0	260.1	252.8	245.2	237.0	229.9	222.7	216.0	210.0	205.0	200.1	195.3
22,5°	241.7	241.5	239.4	233.2	227.5	222.8	219.9	218.0	216.8	215.4	212.1	206.4	199.4	191.8	184.4
25,0°	223.2	218.5	211.6	203.3	198.8	195.8	195.4	196.9	198.4	198.3	196.6	193.2	187.7	180.6	173.1
27,5°	218.3	205.8	194.7	185.1	180.4	178.4	176.8	174.2	171.6	170.3	170.7	172.4	174.2	174.9	173.6
30,0°	222.5	207.0	193.8	182.6	174.2	164.6	155.1	147.8	144.0	144.6	149.1	156.6	165.0	171.4	173.4
32,5°	230.4	216.3	203.8	191.8	174.0	153.9	137.0	126.3	123.6	127.5	134.9	143.0	149.6	155.6	159.2
35,0°	236.2	224.9	211.8	192.5	168.0	146.3	129.8	118.7	112.9	112.0	115.0	120.7	126.5	130.5	132.9
37,5°	236.8	224.4	204.4	180.2	158.1	141.0	127.9	116.9	106.9	98.7	94.7	95.3	98.8	104.0	109.2
40,0°	231.1	211.2	184.8	162.9	145.9	134.1	122.9	109.8	96.3	86.5	79.0	75.7	76.6	82.7	88.8
42,5°	215.3	187.2	161.8	144.2	132.4	122.2	109.1	95.8	84.2	75.0	68.5	65.6	65.5	68.3	72.9
45,0°	190.7	161.2	139.6	127.0	117.5	104.6	91.1	80.0	71.4	66.1	63.2	61.5	60.6	60.8	62.5
46,0°	179.4	150.8	131.3	119.4	109.1	95.3	83.1	73.6	67.2	63.9	61.8	60.4	59.3	59.1	59.9
47,0°	168.1	140.9	123.2	113.0	101.5	87.5	76.6	69.0	64.5	62.3	60.7	59.5	58.4	57.9	58.1
48,0°	157.9	132.2	115.8	106.2	92.5	80.2	70.6	65.5	62.4	60.9	59.5	58.5	57.6	57.0	56.7
49,0°	148.6	124.2	108.9	98.4	84.2	73.3	66.3	62.8	60.9	59.6	58.5	57.5	56.7	56.1	55.5
50,0°	140.6	117.0	102.6	91.3	77.2	68.4	63.4	61.0	59.6	58.4	57.5	56.7	56.0	55.2	54.5
51,0°	133.3	110.2	96.0	82.8	70.5	64.3	60.9	59.3	58.0	57.1	56.3	55.7	54.9	54.2	53.5
52,0°	126.2	103.5	89.3	75.8	65.9	61.4	59.1	57.7	56.7	55.9	55.3	54.8	54.0	53.3	52.6
53,0°	119.8	97.1	82.9	70.2	62.7	59.4	57.5	56.4	55.5	54.8	54.2	53.6	53.0	52.5	51.8
54,0°	113.2	90.5	76.3	64.7	59.8	57.2	55.7	54.8	54.1	53.5	53.0	52.3	51.9	51.5	50.9
55,0°	106.1	84.2	70.2	61.1	57.6	55.5	54.3	53.4	52.7	52.2	51.7	51.2	50.9	50.6	50.1
56,0°	97.9	78.3	65.0	58.3	55.4	53.9	52.6	52.2	51.4	51.0	50.4	50.2	49.9	49.7	49.2
57,0°	87.7	71.8	60.7	55.9	53.6	52.1	51.1	50.6	50.0	49.6	49.2	49.0	48.8	48.8	48.4
58,0°	78.4	64.1	56.6	54.4	52.0	50.7	49.7	49.1	48.6	48.5	48.0	47.9	47.7	47.8	47.5
59,0°	71.7	57.4	51.9	51.6	50.3	49.2	48.2	47.4	46.9	47.0	47.0	46.7	46.6	46.8	46.7
60,0°	66.6	53.1	48.1	48.0	48.7	47.8	46.9	46.1	45.5	45.6	45.7	45.7	45.6	45.8	45.7
61,0°	62.6	50.4	45.9	46.0	47.4	46.7	45.7	44.9	44.3	44.4	44.5	44.7	44.5	44.8	44.7
62,0°	59.1	47.9	44.4	45.1	46.0	45.3	44.3	43.7	43.1	43.0	43.1	43.3	43.3	43.7	43.5
63,0°	55.9	45.7	43.1	44.4	44.7	44.0	43.2	42.6	42.0	41.9	42.0	42.2	42.3	42.5	42.5
64,0°	53.1	43.8	41.7	43.6	43.2	42.7	41.9	41.5	40.9	40.8	40.8	41.1	41.2	41.3	41.2
65,0°	49.9	42.0	40.4	42.3	41.9	41.3	40.7	40.5	40.0	39.8	39.7	40.2	40.3	40.0	40.1
66,0°	46.0	40.1	39.2	41.2	40.5	40.1	39.6	39.3	38.6	38.4	38.5	38.9	39.0	38.9	38.9
67,0°	41.6	38.0	37.9	39.4	38.8	38.4	38.0	37.9	37.3	37.0	36.9	37.4	37.5	37.4	37.3
68,0°	37.9	35.8	36.5	37.5	37.0	36.8	36.6	36.5	36.0	35.6	35.5	36.1	36.4	36.1	35.8
69,0°	35.2	33.6	34.8	35.6	35.1	35.1	34.8	35.0	34.6	34.1	33.8	34.7	34.9	34.1	33.8
70,0°	32.7	31.4	32.6	33.3	33.2	33.0	32.9	33.1	32.8	32.3	32.0	32.9	32.6	31.7	31.9
71,0°	29.9	29.1	30.1	30.9	30.9	31.0	30.9	31.0	30.7	30.4	30.3	30.9	29.9	29.4	29.6
72,0°	27.3	26.7	27.3	28.0	27.9	28.1	27.9	28.0	28.0	28.0	27.9	28.2	27.0	26.8	26.9

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	0.4	0.4
2,5°	243.4	243.3	243.0	242.8	242.8	242.5	242.5	242.4	242.1	242.4	242.1	242.1	242.3	3.0	3.4
5,0°	238.6	237.9	237.3	236.7	236.3	235.9	235.5	235.4	235.1	234.9	234.7	234.6	234.6	6.1	9.5
7,5°	236.8	235.3	233.8	232.5	231.2	230.3	229.3	228.5	227.9	227.3	227.0	226.7	226.7	9.4	18.9
10,0°	232.2	230.4	228.8	227.3	225.9	224.6	223.4	222.3	221.4	220.6	220.2	219.6	219.6	13.0	31.9
12,5°	227.8	224.2	220.1	216.8	213.4	210.6	208.1	205.7	204.1	202.3	201.7	200.6	200.8	16.8	48.6
15,0°	209.6	205.5	201.8	198.6	195.9	193.5	191.4	189.4	187.8	186.4	185.6	184.8	184.8	20.3	68.9
17,5°	198.1	194.4	191.2	188.2	185.6	183.4	181.3	179.2	177.5	175.9	175.0	174.2	174.2	23.4	92.3
20,0°	190.5	185.8	181.2	176.6	172.6	168.7	165.7	162.6	160.3	157.9	156.9	155.5	155.8	25.7	118.0
22,5°	177.4	170.9	165.2	160.0	155.7	151.9	149.1	146.6	144.7	142.8	141.8	141.0	141.0	27.6	145.6
25,0°	166.7	161.7	158.0	155.0	152.6	150.4	148.5	146.8	145.3	144.0	142.8	142.1	142.0	30.1	175.8
27,5°	170.6	166.5	162.1	157.8	153.9	150.5	147.4	144.7	142.6	140.7	139.1	138.1	137.9	33.4	209.2
30,0°	171.2	166.2	160.0	153.7	148.2	142.8	137.9	132.9	129.2	125.8	123.8	122.1	122.1	37.0	246.2
32,5°	159.3	154.0	146.2	137.1	130.5	124.6	120.6	116.8	114.3	111.8	110.6	109.2	109.4	40.6	286.8
35,0°	134.1	133.4	129.8	123.6	117.5	112.4	108.5	105.3	102.6	100.6	99.2	98.3	98.2	44.2	330.9
37,5°	113.3	115.3	114.5	110.5	105.4	100.4	96.7	93.4	91.0	89.0	87.8	86.8	86.8	47.1	378.0
40,0°	94.4	96.6	97.6	94.4	90.9	85.9	83.0	79.7	78.3	76.2	75.9	74.7	75.2	48.5	426.5
42,5°	77.4	79.8	79.8	77.7	74.6	71.2	68.7	66.9	65.9	65.0	64.6	64.4	64.5	48.6	475.1
45,0°	65.0	66.5	66.1	64.0	61.6	59.9	59.1	58.9	59.3	59.6	60.0	60.3	60.5	33.2	508.4
46,0°	61.4	62.3	61.8	60.0	58.7	58.0	57.7	57.7	58.2	58.7	59.2	59.6	59.8	18.9	527.3
47,0°	59.0	59.5	58.9	58.1	57.5	56.9	56.6	56.6	57.2	57.8	58.5	59.0	59.3	18.7	546.0
48,0°	57.2	57.3	57.3	56.9	56.4	55.7	55.6	55.6	56.3	56.9	57.7	58.2	58.7	18.5	564.5
49,0°	55.7	56.0	56.3	55.9	55.3	54.8	54.7	54.7	55.3	56.0	56.9	57.5	57.9	18.2	582.7
50,0°	54.5	55.0	55.5	55.2	54.6	53.9	53.7	53.7	54.4	55.1	55.9	56.6	57.0	18.0	600.7
51,0°	53.4	53.8	54.5	54.5	53.9	53.0	52.7	52.7	53.2	54.0	54.8	55.5	55.8	17.7	618.4
52,0°	52.5	52.7	53.3	53.8	53.3	52.4	51.8	51.6	52.0	52.7	53.4	54.1	54.4	17.5	635.9
53,0°	51.5	51.7	52.1	52.5	52.6	51.7	50.9	50.5	50.7	51.2	52.0	52.6	52.9	17.2	653.1
54,0°	50.5	50.5	51.0	51.0	51.1	50.8	50.1	49.5	49.4	49.8	50.5	51.0	51.3	17.0	670.1
55,0°	49.6	49.5	50.0	50.0	49.9	49.6	49.4	48.9	48.3	48.4	49.1	49.6	49.9	16.8	686.8
56,0°	48.8	48.5	48.9	48.9	48.6	48.1	48.3	47.8	47.3	47.0	47.8	48.1	48.5	16.5	703.4
57,0°	47.9	47.6	47.7	47.8	47.5	46.9	46.6	46.5	46.0	45.6	46.5	46.9	46.9	16.3	719.7
58,0°	47.0	46.5	46.5	46.6	46.6	45.9	45.3	44.9	44.5	44.3	45.2	45.7	45.5	16.1	735.8
59,0°	46.1	45.2	45.2	45.4	45.5	44.8	44.1	43.5	43.0	42.9	44.1	44.7	44.0	15.9	751.7
60,0°	45.1	44.1	44.1	44.2	44.3	43.8	43.2	42.4	41.8	42.0	43.7	43.9	42.9	15.6	767.3
61,0°	44.1	43.2	42.8	43.2	43.1	42.8	42.2	41.3	40.6	40.7	42.0	42.3	41.7	15.4	782.7
62,0°	43.0	42.2	41.7	41.8	42.0	41.5	41.1	40.3	39.3	39.0	39.9	40.2	40.1	15.2	797.9
63,0°	42.1	41.3	40.8	40.6	40.8	40.2	39.8	39.1	38.0	37.5	38.0	38.3	38.4	15.0	812.9
64,0°	41.1	40.4	39.9	39.5	39.6	38.7	38.3	37.4	36.7	35.6	36.2	36.2	36.7	14.7	827.5
65,0°	40.2	39.9	39.3	38.8	38.4	37.1	36.4	35.6	34.6	33.3	33.6	33.7	34.2	14.4	841.9
66,0°	39.5	39.2	38.9	38.4	36.8	34.7	34.0	33.0	32.0	31.0	31.1	31.2	31.9	14.1	856.1
67,0°	38.3	38.5	38.3	37.0	33.9	31.7	31.2	30.4	29.7	28.3	28.5	28.6	29.2	14.0	870.0
68,0°	36.5	37.3	37.8	34.5	31.1	28.9	28.7	27.6	27.1	25.5	25.8	25.7	26.3	13.9	883.9
69,0°	34.9	35.9	35.7	30.9	27.9	25.4	25.4	24.7	24.6	23.4	23.6	22.9	23.8	13.9	897.8
70,0°	33.0	34.2	32.2	27.4	24.6	22.9	22.4	22.2	22.3	21.5	21.0	20.3	20.8	13.8	911.6
71,0°	30.6	31.8	28.3	23.8	22.1	20.0	19.4	19.4	20.0	19.5	18.3	17.5	17.6	13.6	925.1
72,0°	28.0	27.2	24.1	20.1	18.6	17.2	16.4	16.3	17.3	16.1	15.3	14.7	15.0	13.2	938.3

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
--	--	-------------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	314.2	327.1	363.0	397.4	422.7	442.9	443.9	424.6	388.6	334.2	283.3	254.4	265.4	296.9	310.4
74,0°	302.3	315.4	351.4	383.4	407.0	421.3	422.6	404.3	368.4	319.2	278.5	252.6	254.3	276.8	278.8
75,0°	271.9	282.4	317.5	348.3	373.3	382.5	388.8	372.7	343.4	304.4	279.4	261.8	262.3	267.5	251.6
76,0°	203.4	205.7	235.6	259.9	289.7	298.9	320.0	312.0	301.5	279.0	270.4	271.0	278.1	258.7	216.4
77,0°	127.7	125.1	141.5	158.4	183.6	190.1	209.0	211.9	225.2	227.5	246.7	272.1	287.2	232.7	167.6
78,0°	69.4	62.5	74.1	81.0	106.1	107.6	125.5	119.8	140.1	148.2	182.4	203.3	237.4	175.8	116.2
79,0°	29.2	27.1	30.4	36.2	50.1	55.6	64.6	67.3	83.0	101.9	127.0	132.3	111.3	97.4	67.9
80,0°	12.8	12.6	14.0	17.5	21.8	23.3	28.0	29.0	41.4	56.8	84.5	75.6	49.9	39.4	30.6
81,0°	7.7	8.0	8.9	10.4	11.7	11.5	12.4	12.0	15.1	20.5	28.7	25.3	16.6	15.8	13.4
82,0°	5.8	6.0	6.6	7.2	7.9	7.5	7.7	7.8	8.6	10.6	14.3	13.0	9.1	8.3	8.1
83,0°	4.4	4.5	4.9	5.1	5.5	5.4	5.4	5.6	5.8	6.4	8.8	9.1	7.0	5.9	5.9
84,0°	3.1	3.1	3.3	3.3	3.5	3.5	3.6	3.6	3.8	3.9	4.6	4.7	4.4	4.2	4.3
85,0°	2.4	2.3	2.3	2.3	2.4	2.3	2.5	2.5	2.6	2.6	2.8	2.8	2.9	2.8	3.0
86,0°	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.6	1.7	1.6	1.8	1.8	1.9	1.8	2.0
87,0°	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.2
88,0°	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.8	0.7	0.7	0.7	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	308.3	289.8	248.1	201.6	148.8	101.1	66.6	46.0	32.7	28.1	26.8	25.7	25.0	24.3	22.6
74,0°	264.8	245.1	208.3	168.0	120.8	81.4	53.7	38.2	29.2	25.7	24.6	23.7	23.1	22.3	20.7
75,0°	221.4	197.5	168.0	137.9	96.7	64.3	42.4	32.1	26.6	23.9	22.7	22.1	21.1	20.4	18.8
76,0°	170.0	141.6	116.1	96.9	66.0	46.5	33.7	27.6	23.9	22.0	20.8	20.3	18.8	18.0	16.6
77,0°	115.1	88.3	66.5	54.7	37.9	29.4	24.9	23.6	21.5	19.9	18.7	18.0	16.1	15.0	13.9
78,0°	76.5	58.2	42.9	33.1	24.2	20.5	19.2	19.7	18.8	17.7	16.6	16.0	13.8	12.5	11.6
79,0°	51.1	41.7	30.0	23.4	18.1	15.9	14.7	15.6	15.2	15.4	14.3	13.4	11.4	10.3	9.3
80,0°	27.2	25.0	20.1	16.4	13.4	11.9	11.1	11.4	11.9	13.0	12.3	11.1	9.1	8.2	7.6
81,0°	11.7	12.0	11.9	11.4	9.8	9.0	8.5	8.7	9.5	10.7	10.3	9.2	7.2	6.5	6.0
82,0°	7.4	7.2	7.5	7.3	6.8	6.7	6.6	6.8	7.5	8.7	8.4	7.3	5.7	5.0	4.6
83,0°	5.7	5.7	5.8	5.1	4.8	4.9	4.8	5.2	5.6	6.5	6.1	5.3	4.3	3.8	3.5
84,0°	4.3	4.5	4.4	3.8	3.4	3.3	3.3	3.6	3.8	4.5	4.3	3.9	3.2	2.9	2.7
85,0°	3.1	3.3	3.2	2.8	2.4	2.3	2.2	2.2	2.3	2.8	2.6	2.5	2.1	2.1	1.9
86,0°	2.0	2.2	2.1	2.0	1.7	1.7	1.5	1.5	1.4	1.5	1.4	1.5	1.4	1.4	1.3
87,0°	1.2	1.4	1.3	1.3	1.1	1.1	1.0	1.0	0.9	1.0	0.9	1.0	0.9	0.9	0.9
88,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
89,0°	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
--	--	-------------------------------------

siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	21.3	20.0	19.0	18.2	17.6	17.4	17.7	313.3	276.8	182.6	96.1	62.4	48.6	36.4	28.9
74,0°	19.7	18.1	17.0	16.2	15.6	15.3	15.5	298.9	258.9	160.8	84.5	62.2	47.9	34.5	26.9
75,0°	18.1	16.5	15.3	14.4	13.8	13.6	13.6	264.0	223.5	129.7	69.4	55.9	45.5	31.7	24.5
76,0°	16.3	14.7	13.7	12.7	12.1	11.7	11.8	192.6	158.3	84.1	46.3	41.8	38.2	28.2	21.4
77,0°	14.0	12.6	11.8	10.9	10.4	9.8	9.9	119.2	94.7	47.7	27.5	30.6	30.2	25.2	18.9
78,0°	12.0	10.8	10.1	9.4	8.8	8.3	8.4	60.8	51.0	28.7	23.6	31.7	31.7	27.0	18.5
79,0°	9.9	8.8	8.6	7.8	7.4	6.8	6.9	26.2	24.1	20.1	24.0	34.5	38.1	31.6	19.5
80,0°	7.8	7.1	6.8	6.2	5.7	5.4	5.4	11.7	11.9	13.1	17.9	27.0	35.6	31.7	18.8
81,0°	6.3	5.7	5.4	4.9	4.6	4.3	4.3	7.2	7.1	7.6	9.6	14.8	24.3	24.2	14.8
82,0°	4.8	4.3	4.1	3.9	3.7	3.5	3.5	5.5	5.5	5.5	6.1	7.9	14.2	14.8	9.6
83,0°	3.5	3.2	3.1	3.1	2.9	2.8	2.8	4.2	4.2	4.2	4.5	4.9	6.9	7.1	5.4
84,0°	2.6	2.5	2.3	2.3	2.3	2.2	2.2	3.1	3.2	3.2	3.3	3.4	3.6	3.5	3.2
85,0°	1.9	1.7	1.7	1.6	1.6	1.5	1.6	2.3	2.4	2.4	2.5	2.4	2.4	2.3	2.3
86,0°	1.3	1.2	1.1	1.1	1.1	1.1	1.1	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.8
87,0°	0.9	0.8	0.8	0.7	0.7	0.7	0.8	1.4	1.5	1.4	1.5	1.5	1.4	1.4	1.4
88,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	0.4	0.4	0.4	0.3	0.3	0.3	0.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72	
--	--	-------------------------------------	--

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
Luminous intensity in cd/klm															
γ															
73,0°	24.9	24.3	24.5	25.3	25.5	25.7	25.5	25.6	25.6	25.7	25.5	25.3	24.2	24.2	24.3
74,0°	22.7	21.8	22.0	23.1	23.1	23.3	23.3	23.1	23.0	23.0	22.3	21.8	21.3	22.1	22.2
75,0°	20.1	19.3	19.5	20.0	20.1	20.7	20.5	20.1	19.5	19.2	18.5	18.6	18.7	19.6	20.1
76,0°	17.5	16.8	17.0	17.6	17.7	18.1	17.8	17.2	16.6	16.1	16.0	16.1	16.1	16.5	17.1
77,0°	15.2	14.8	14.8	15.1	14.9	15.8	14.9	14.7	13.6	13.6	13.1	13.4	12.7	13.5	13.5
78,0°	13.3	13.0	12.8	12.6	12.4	13.0	12.1	11.6	11.1	10.9	10.7	10.7	10.4	10.5	10.3
79,0°	12.2	11.5	11.0	10.5	10.6	10.6	9.8	9.6	9.0	8.8	8.6	8.6	8.3	8.5	8.1
80,0°	10.6	9.9	9.3	8.2	8.3	8.6	8.1	7.7	7.2	6.8	6.6	6.5	6.1	6.1	6.0
81,0°	8.5	8.0	7.5	6.6	6.6	6.8	6.6	6.2	5.6	5.3	5.0	4.8	4.6	4.6	4.5
82,0°	6.3	6.0	5.6	5.1	5.1	5.3	5.1	4.9	4.4	4.1	3.7	3.6	3.3	3.2	3.2
83,0°	4.4	4.3	4.0	3.8	3.7	3.8	3.8	3.5	3.1	2.9	2.7	2.6	2.4	2.4	2.2
84,0°	3.0	3.0	2.8	2.7	2.7	2.8	2.7	2.5	2.2	2.1	2.0	2.0	1.8	1.7	1.6
85,0°	2.2	2.2	2.0	2.0	1.8	1.9	1.7	1.8	1.5	1.5	1.3	1.3	1.2	1.1	0.9
86,0°	1.7	1.7	1.6	1.4	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.8	0.7
87,0°	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.7	0.6
88,0°	1.2	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
Luminous intensity in cd/klm															
Luminous flux in lm/klm															
γ															
73,0°	25.2	23.7	20.7	17.3	15.7	14.3	13.6	13.2	13.9	12.2	11.9	11.5	12.0	12.5	950.9
74,0°	22.7	20.6	17.8	14.9	13.0	11.5	11.0	10.5	10.8	9.4	9.0	8.5	8.6	11.7	962.5
75,0°	19.7	17.1	15.0	13.1	11.1	9.5	9.0	8.4	8.6	7.4	7.0	6.4	6.5	10.6	973.1
76,0°	16.2	14.3	12.8	11.1	9.6	8.0	7.3	6.7	6.5	5.6	5.1	4.7	4.8	8.7	981.9
77,0°	13.4	11.9	10.7	9.0	7.7	6.2	6.0	5.0	4.6	3.7	3.4	2.9	3.1	6.4	988.3
78,0°	10.5	9.9	8.8	7.2	5.7	4.7	4.3	3.6	3.1	2.4	2.0	1.7	1.7	4.4	992.7
79,0°	8.3	7.6	6.9	5.6	4.5	3.8	3.4	2.7	2.2	1.6	1.2	1.0	1.0	2.8	995.4
80,0°	6.2	5.6	5.3	4.3	3.5	2.9	2.4	1.9	1.6	1.1	0.8	0.7	0.7	1.7	997.1
81,0°	4.5	4.1	4.0	3.2	2.6	2.2	1.9	1.5	1.2	0.9	0.7	0.5	0.5	0.9	998.0
82,0°	3.2	3.0	3.0	2.4	2.0	1.6	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	998.6
83,0°	2.0	2.1	2.2	1.7	1.4	1.2	1.0	0.8	0.6	0.5	0.5	0.4	0.4	0.4	999.1
84,0°	1.5	1.6	1.5	1.1	1.0	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	999.7
87,0°	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.9
89,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
---	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	12830	87.3	90.3	88.8
95	94	12195	82.1	84.8	83.4
90	88	11543	76.8	79.3	78.0
85	82	10876	71.5	73.9	72.7
80	77	10302	67.0	69.3	68.2
75	71	9595	61.9	63.9	62.9
70	66	9000	57.5	59.4	58.4
65	61	8396	53.4	55.0	54.2
60	55	7655	48.2	49.7	49.0
55	50	7025	44.0	45.3	44.6
50	45	6380	39.8	41.0	40.4
45	40	5724	35.7	36.7	36.2
40	36	5190	32.2	33.2	32.7
35	31	4514	28.1	28.9	28.5
30	26	3826	24.0	24.7	24.4
25	22	3267	20.7	21.3	21.0
20	17	2560	16.6	17.0	16.8
15	13	1987	13.3	13.7	13.5
10	8	1258	9.0	9.3	9.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	13250	88.3	91.4	89.8
95	94	12573	83.0	85.8	84.4
90	88	11882	77.7	80.2	79.0
85	83	11296	73.2	75.7	74.4
80	77	10573	67.9	70.2	69.1
75	72	9959	63.6	65.6	64.6
70	66	9214	58.3	60.2	59.2
65	61	8584	54.1	55.7	54.9
60	56	7944	49.8	51.3	50.6
55	51	7295	45.4	46.9	46.2
50	46	6632	41.2	42.4	41.8
45	41	5960	37.0	38.1	37.6
40	36	5277	32.7	33.7	33.2
35	31	4584	28.5	29.3	28.9
30	27	4023	25.2	26.0	25.6
25	22	3312	21.0	21.6	21.3
20	17	2593	16.9	17.3	17.1
15	13	2011	13.5	13.9	13.7
10	8	1272	9.1	9.4	9.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
---	--	-------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	13060	87.8	90.8	89.3
95	94	12403	82.5	85.2	83.8
90	88	11730	77.2	79.7	78.4
85	83	11157	72.7	75.2	74.0
80	77	10452	67.5	69.8	68.6
75	72	9850	63.2	65.2	64.2
70	66	9120	57.9	59.8	58.8
65	61	8502	53.7	55.4	54.6
60	56	7871	49.4	50.9	50.2
55	51	7233	45.1	46.6	45.8
50	46	6579	40.9	42.2	41.6
45	41	5915	36.7	37.8	37.2
40	36	5240	32.5	33.5	33.0
35	31	4555	28.3	29.1	28.7
30	26	3859	24.2	24.9	24.5
25	22	3294	20.8	21.5	21.2
20	17	2580	16.7	17.1	16.9
15	13	2001	13.4	13.8	13.6
10	8	1267	9.1	9.3	9.2

Photometric test report

Family Streetlight 21 mini easy LED	Order number: 5XE6B33A08JB EAN: 4058352730379	LP number 59074_72
---	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	12830.0	87.3
5.0	13250.0	88.3
15.0	13060.0	87.8