
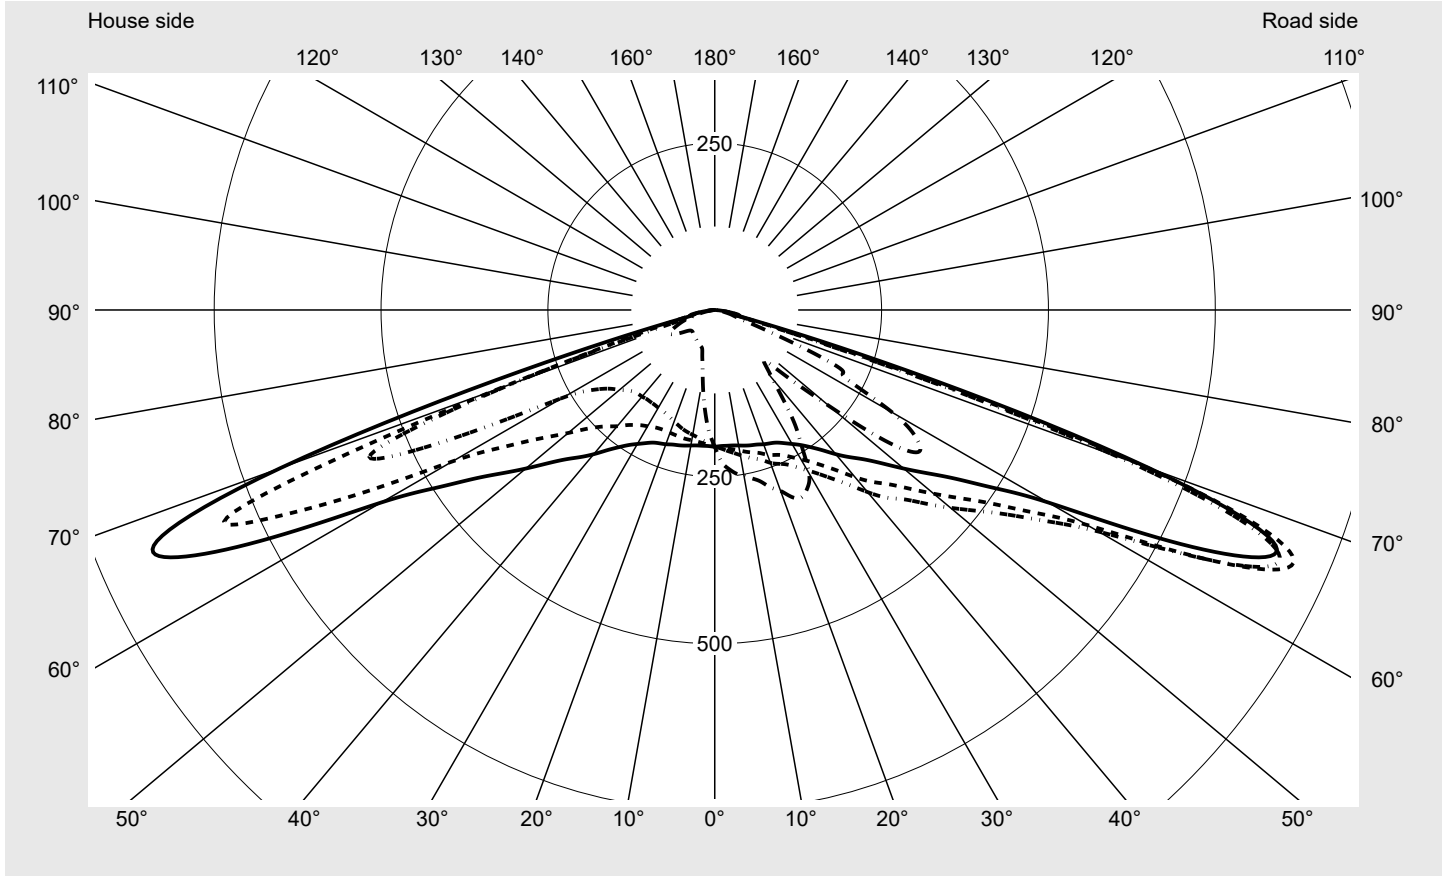


Photometric test report

Family Floodlight FL11 	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
	Version standard bracket Optic asymmetric distribution PL61 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 102580 lm Power consumption = 747.5 W Luminous efficacy = 137.2 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 924 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	692.3
Imax 80°	30.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
----------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

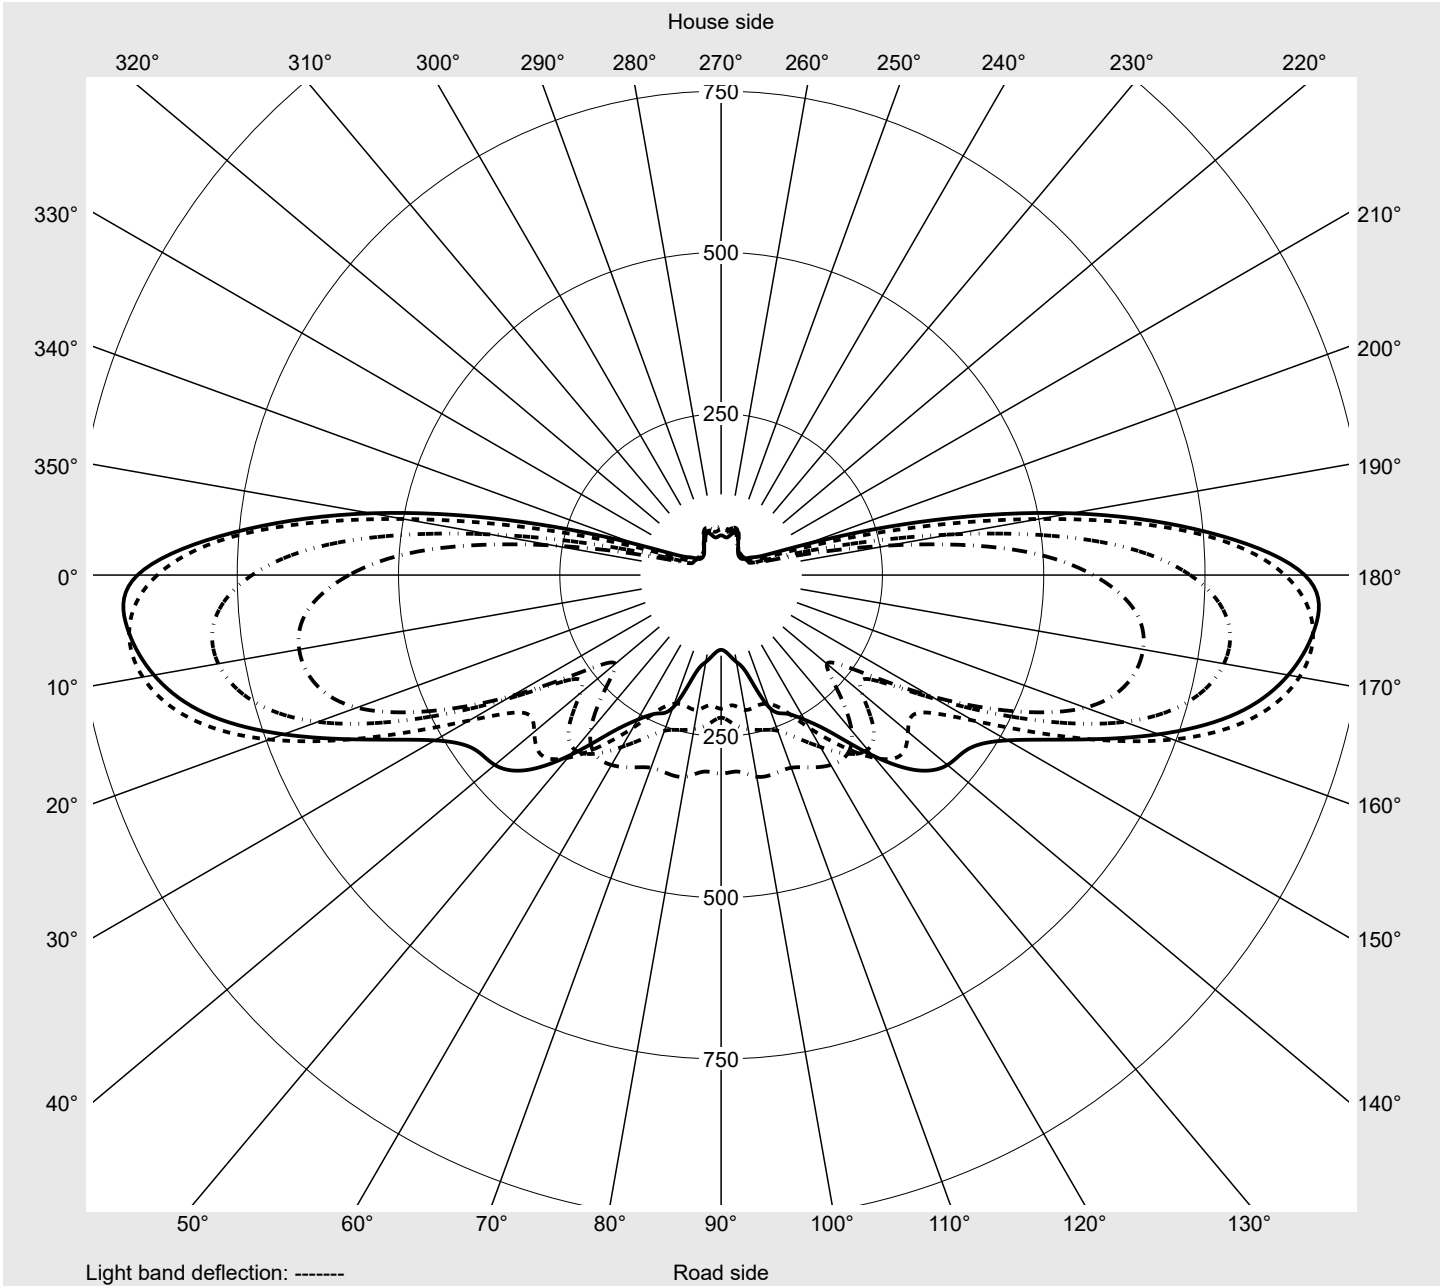

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	204.1	205.9	207.6	209.4	211.0	212.6	214.0	215.5	216.8	218.0	219.2	220.1	221.1
5,0°	204.3	208.1	211.7	215.1	218.3	221.3	224.0	226.5	228.6	230.5	232.2	233.5	234.7
7,5°	204.7	210.6	216.0	220.8	225.0	228.8	232.0	234.9	237.1	239.0	240.7	242.0	243.1
10,0°	206.2	213.9	220.8	226.7	231.6	235.7	239.0	241.6	243.4	245.1	246.3	247.5	248.5
12,5°	208.1	217.6	225.8	232.8	238.2	242.2	245.2	247.4	249.0	250.5	251.6	252.7	253.8
15,0°	209.8	221.1	230.6	238.4	244.1	248.1	251.0	253.2	254.7	256.3	257.5	258.9	260.4
17,5°	211.4	224.8	235.6	244.3	250.3	254.1	257.1	259.4	261.3	263.4	265.0	266.9	268.9
20,0°	214.1	230.8	243.7	252.6	257.5	260.6	263.4	265.7	268.2	270.9	273.6	276.5	279.0
22,5°	216.2	235.1	249.5	259.0	263.9	267.5	270.6	273.8	276.7	280.5	284.6	288.8	292.0
25,0°	219.3	240.0	255.4	265.5	271.3	275.6	279.2	282.8	286.7	291.7	297.1	302.3	305.5
27,5°	224.9	248.4	265.4	276.0	282.4	286.8	290.4	294.3	299.5	305.6	311.0	314.3	315.2
30,0°	231.8	258.3	277.3	288.5	295.5	300.5	304.4	308.1	312.6	317.6	320.2	319.2	314.6
32,5°	240.0	270.2	291.6	303.6	311.4	317.0	321.3	325.1	327.0	326.0	322.4	315.3	304.8
35,0°	251.0	285.3	309.0	322.8	331.8	337.8	341.8	343.9	340.7	330.8	318.4	305.6	290.0
37,5°	264.8	303.9	330.0	345.6	355.4	362.0	364.9	361.5	349.7	331.0	310.0	292.0	270.3
40,0°	282.0	327.0	356.1	372.8	383.3	389.8	391.1	379.8	355.4	325.3	296.0	267.5	238.5
42,5°	299.1	349.3	381.5	400.1	410.6	416.3	412.2	389.5	350.3	306.4	265.4	228.3	197.1
45,0°	316.6	369.4	401.3	419.1	428.3	430.6	416.6	381.3	333.5	281.9	233.9	194.2	165.1
47,5°	340.2	396.4	429.6	445.6	453.0	449.8	423.6	375.7	317.5	257.6	204.8	168.1	148.1
50,0°	369.6	428.3	461.1	474.4	477.4	463.0	422.5	363.0	295.4	230.2	181.3	159.0	162.0
52,5°	401.9	463.3	494.2	504.2	500.7	470.9	414.9	342.7	265.8	202.0	174.5	186.1	216.1
55,0°	441.1	505.3	534.1	538.4	524.1	476.3	403.0	316.4	233.2	186.7	198.5	241.5	284.7
57,5°	496.4	564.0	588.7	584.0	554.2	482.5	388.1	284.4	206.9	201.3	252.0	305.4	339.5
60,0°	576.7	644.3	664.1	651.1	600.9	499.1	374.5	259.3	214.2	257.9	314.6	339.9	339.9
62,5°	727.1	787.6	791.4	752.3	665.5	530.0	385.4	281.8	285.1	333.6	353.2	337.8	307.7
65,0°	873.9	920.6	910.3	854.1	745.2	594.1	451.0	372.6	378.1	394.2	369.9	322.8	273.7
67,5°	904.6	924.4	892.6	827.7	721.6	603.3	512.4	469.0	457.9	427.6	364.8	298.4	259.0
70,0°	692.3	683.4	640.8	616.3	574.3	530.6	499.4	482.0	461.6	395.0	327.5	275.1	237.3
72,5°	304.0	238.3	203.0	260.5	362.4	384.3	380.7	369.4	325.3	266.7	227.4	180.7	147.1
75,0°	64.8	47.4	44.1	55.4	144.8	194.0	196.1	169.5	92.1	70.4	94.1	71.8	61.3
77,5°	36.5	33.7	33.3	31.6	45.4	59.9	56.3	31.9	26.4	27.1	33.5	31.7	28.1
80,0°	30.4	27.3	26.5	25.1	23.1	23.0	20.7	17.5	16.7	16.2	16.3	19.2	19.4
82,5°	16.5	15.6	16.7	16.1	13.7	12.7	11.6	10.0	9.6	9.3	8.7	9.1	10.2
85,0°	6.6	6.6	7.3	7.3	6.4	5.7	5.0	4.6	4.2	3.8	3.5	3.2	3.1
87,5°	2.2	2.3	2.2	2.2	2.0	1.8	1.6	1.4	1.3	1.1	1.1	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	222.0	222.8	223.4	224.0	224.3	227.3	202.3	200.6	198.8	197.0	195.2	193.6	192.1
5,0°	235.9	236.9	237.7	238.2	238.6	238.9	200.4	196.6	192.6	188.6	184.7	181.0	177.5
7,5°	244.1	244.8	245.4	245.9	246.3	247.2	198.9	192.9	186.6	180.5	174.3	168.5	162.8
10,0°	249.5	250.1	250.7	251.1	251.6	252.1	198.3	190.0	181.6	173.1	164.7	156.5	148.6
12,5°	254.9	255.9	256.5	257.0	257.6	258.5	198.0	187.5	176.9	166.2	155.4	144.9	134.5
15,0°	261.9	263.3	264.4	265.2	266.0	266.2	197.5	184.7	171.8	159.0	146.2	133.6	121.7
17,5°	271.0	273.0	274.7	275.9	276.8	278.8	196.5	181.1	165.7	150.7	135.6	121.7	109.2
20,0°	281.5	283.8	286.0	287.6	288.8	288.5	195.8	177.8	159.7	141.9	125.1	110.6	98.7
22,5°	294.3	296.3	298.4	300.3	301.5	303.6	195.4	174.3	153.3	132.9	114.7	100.2	87.9
25,0°	306.5	306.1	306.6	307.9	308.7	309.1	196.0	171.7	147.3	124.8	105.3	89.2	76.0
27,5°	312.0	306.2	303.2	303.4	303.1	300.7	197.9	169.9	141.7	116.5	94.3	76.2	68.3
30,0°	305.5	293.7	287.1	285.4	282.4	282.6	201.2	169.1	137.0	108.7	81.8	68.5	65.3
32,5°	289.9	273.0	262.8	257.1	249.5	243.0	204.8	168.2	131.9	98.7	72.2	65.3	63.6
35,0°	268.4	245.7	231.9	220.0	208.5	209.7	210.4	168.0	126.5	87.6	66.8	63.4	62.1
37,5°	242.5	214.8	198.3	180.4	168.5	167.6	217.5	168.0	118.2	76.7	63.6	61.4	60.4
40,0°	206.1	177.7	162.1	141.9	133.3	135.1	227.3	169.5	107.3	68.2	60.9	59.3	58.5
42,5°	170.8	149.5	133.4	119.3	114.5	113.1	236.5	170.2	97.2	63.0	58.3	57.1	56.4
45,0°	145.3	128.7	118.9	111.2	108.8	108.8	248.1	172.9	92.0	60.1	56.3	55.1	54.2
47,5°	142.0	138.1	139.0	141.9	143.6	153.7	264.5	178.3	89.3	58.1	54.7	53.4	52.4
50,0°	178.8	195.0	206.9	220.9	226.9	224.5	286.8	186.2	88.9	56.5	53.1	51.7	50.8
52,5°	247.7	273.0	293.1	311.6	317.7	321.5	311.7	194.2	88.9	55.1	51.5	50.2	49.2
55,0°	320.9	344.4	359.9	372.8	371.0	371.4	343.0	206.1	91.2	54.2	50.0	48.7	47.8
57,5°	355.1	358.8	363.7	367.9	359.6	358.6	386.1	224.8	96.0	53.6	48.6	47.1	46.5
60,0°	328.9	317.8	318.6	317.3	305.8	307.7	453.8	263.3	108.8	54.4	47.4	46.0	45.4
62,5°	278.5	256.8	248.5	242.4	232.3	221.1	590.3	362.7	154.6	61.6	47.4	45.6	44.5
65,0°	231.6	212.4	210.3	212.2	202.7	207.2	740.4	500.4	255.9	94.5	53.9	47.0	43.6
67,5°	236.9	218.5	160.4	136.8	122.6	115.9	758.3	551.2	317.3	138.6	70.9	54.8	43.8
70,0°	212.7	183.9	65.2	48.9	46.2	50.5	337.4	322.6	227.0	124.9	74.3	60.0	45.2
72,5°	128.8	109.5	39.2	34.3	33.8	31.2	126.8	73.2	68.7	66.6	49.6	46.1	37.0
75,0°	60.8	58.1	29.6	25.8	25.1	24.1	57.8	34.5	34.5	35.0	31.4	29.8	27.8
77,5°	27.9	27.5	20.6	18.4	17.7	15.6	32.8	27.6	25.4	24.2	22.8	21.4	20.4
80,0°	15.8	14.4	12.7	11.6	10.7	10.4	27.2	20.6	17.6	16.6	16.8	14.6	13.9
82,5°	8.2	7.7	6.9	6.4	5.9	5.7	15.1	12.9	10.8	10.2	12.6	8.6	8.3
85,0°	2.8	2.6	2.5	2.4	2.4	2.5	6.7	5.9	5.4	4.9	5.2	4.3	4.0
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	2.2	2.1	2.1	2.0	1.9	1.7	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	0.3	0.3
2,5°	190.7	189.5	188.2	187.3	186.4	185.7	185.3	184.9	184.7	184.2	184.4	2.4	2.7
5,0°	174.2	171.1	168.2	165.7	163.5	161.5	160.0	158.7	158.0	157.2	157.1	4.8	7.5
7,5°	157.4	152.4	147.7	143.5	139.8	136.6	134.0	132.1	130.6	129.5	129.2	7.0	14.6
10,0°	141.0	133.8	127.2	121.6	116.8	112.7	109.5	107.0	105.2	104.0	103.6	9.1	23.6
12,5°	124.9	116.3	108.4	101.9	96.7	92.6	89.5	87.2	85.7	84.7	84.4	11.1	34.7
15,0°	111.0	101.7	94.1	87.9	83.1	79.5	76.8	74.9	73.4	72.5	72.2	13.1	47.8
17,5°	98.8	89.9	81.4	74.6	69.9	66.9	65.0	63.8	62.9	62.3	62.1	15.1	62.9
20,0°	88.4	77.5	70.9	67.1	64.5	62.6	61.2	60.2	59.5	59.0	58.8	17.3	80.2
22,5°	76.3	69.9	66.6	64.8	63.1	61.6	60.2	59.1	58.3	57.7	57.4	19.6	99.8
25,0°	69.3	66.4	65.2	64.1	62.8	61.4	60.0	58.7	57.7	56.9	56.6	22.0	121.8
27,5°	65.8	64.8	64.3	63.8	62.9	61.7	60.1	58.5	57.1	56.0	55.5	24.3	146.0
30,0°	64.3	63.9	63.8	63.7	63.1	61.8	59.7	57.6	55.7	54.4	53.7	26.3	172.3
32,5°	63.0	63.0	63.3	63.3	62.5	60.8	58.6	56.5	54.5	52.9	52.1	28.1	200.4
35,0°	61.7	61.9	62.1	61.9	61.1	59.8	58.0	56.0	54.2	52.6	51.7	29.6	230.1
37,5°	60.1	60.2	60.2	60.2	59.8	58.9	57.1	55.0	53.0	51.3	50.3	31.0	261.1
40,0°	58.2	58.0	58.2	58.3	58.3	57.1	55.3	53.4	51.5	49.8	48.8	32.2	293.3
42,5°	55.8	55.8	56.0	56.3	55.9	54.8	53.5	52.1	50.5	48.8	47.7	33.2	326.5
45,0°	53.7	53.6	53.8	53.6	53.2	52.8	52.1	51.0	49.6	47.8	46.7	34.0	360.6
47,5°	51.9	51.7	51.5	51.0	51.2	51.2	50.9	50.5	49.3	47.6	46.6	36.3	396.9
50,0°	50.2	49.9	49.1	49.1	49.6	49.9	50.6	50.8	50.1	48.8	47.9	40.4	437.3
52,5°	48.7	48.0	47.6	47.7	48.4	49.9	51.9	53.2	52.9	52.1	51.7	45.7	483.0
55,0°	47.1	46.4	46.5	46.8	48.1	51.1	55.5	58.0	57.9	58.0	58.3	51.3	534.3
57,5°	45.5	45.2	45.8	46.5	48.8	54.1	61.2	64.5	63.9	64.7	65.9	55.9	590.2
60,0°	44.1	44.2	44.9	46.4	50.2	58.1	68.0	71.4	69.3	70.6	72.8	60.0	650.3
62,5°	43.1	43.1	44.1	46.7	52.3	62.6	73.9	76.1	72.0	73.2	75.8	66.5	716.7
65,0°	42.0	41.8	43.2	46.8	53.8	64.8	75.3	75.0	68.6	68.4	70.7	75.8	792.5
67,5°	40.0	39.9	41.4	45.6	52.8	62.1	68.9	66.5	59.7	59.6	61.6	78.1	870.6
70,0°	37.0	36.6	38.1	41.7	48.1	56.1	61.3	58.0	51.5	50.7	52.3	62.2	932.8
72,5°	31.9	31.2	32.8	36.8	42.3	48.1	50.6	46.7	40.8	39.7	41.0	35.6	968.4
75,0°	25.9	25.7	27.4	30.7	34.5	36.9	36.2	32.6	28.4	27.5	28.4	15.4	983.8
77,5°	19.9	19.9	20.7	22.3	24.1	25.7	25.4	22.7	20.1	19.4	20.0	7.4	991.2
80,0°	13.4	13.2	13.7	14.6	14.9	15.2	14.8	13.1	11.7	11.3	11.4	4.7	995.9
82,5°	7.9	7.6	7.7	7.6	7.7	7.7	7.1	6.1	5.5	5.4	5.4	2.6	998.5
85,0°	3.6	3.4	3.1	2.9	2.6	2.4	2.2	2.2	2.1	2.1	2.0	1.1	999.6
87,5°	1.5	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.1	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779416C01BA
EAN: 4058352607848

LP number
59236_21

Dimming levels table

environmental temperature: 10°C

sitEco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	102580	747.5
95	237	97457	695.8
90	221	92417	647.8
85	205	87048	599.3
80	191	82207	557.4
75	176	76866	513.2
70	162	71713	471.9
65	149	66814	433.6
60	136	61700	395.7
55	122	56235	355.1
50	110	51234	320.3
45	98	46151	285.7
40	86	40957	251.3
35	75	36111	219.1
30	63	30795	185.6
25	52	25672	154.6
20	41	20481	123.8
15	30	15239	93.4
10	20	10371	65.9
5	9	4909	35.9
2	3	1889	18.6

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	99000	742.3
95	236	94050	687.8
90	219	89052	636.8
85	203	84003	588.8
80	188	79056	544.4
75	174	74303	503.0
70	160	69386	461.8
65	146	64280	421.1
60	133	59481	383.1
55	120	54416	346.0
50	108	49514	311.4
45	96	44566	277.2
40	84	39543	242.4
35	73	34722	211.4
30	62	29919	180.7
25	51	24889	150.2
20	40	19779	119.7
15	29	14631	89.7
10	19	9773	62.5
5	9	4866	35.5
2	3	1874	18.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01BA EAN: 4058352607848	LP number 59236_21
----------------------------------	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	102580.0	747.5
25.0	99000.0	742.3