

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST1.0a G) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 10300 lm Power consumption = 62.6 W Luminous efficacy = 164.5 lm/W	serial documentation 03.04.2023



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 489 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	461.5
Imax 80°	96.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

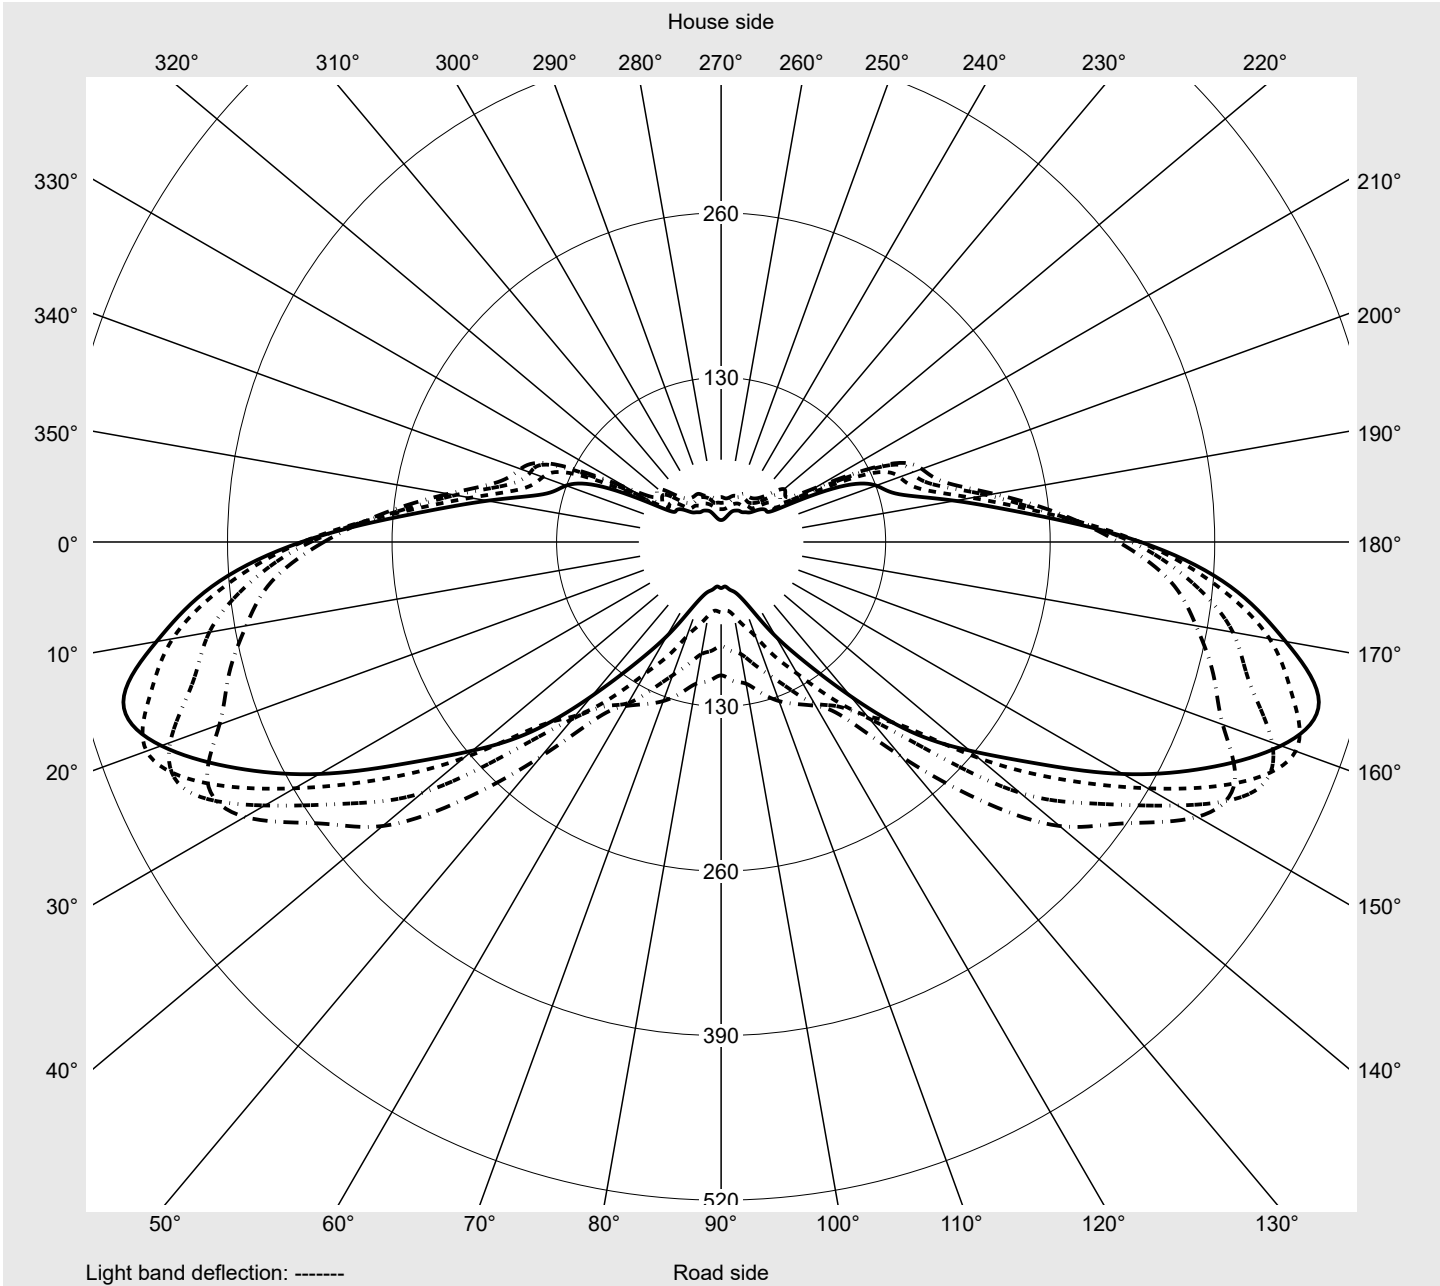

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	277.0	276.4	275.2	274.5	273.0	273.7	272.9	273.0	271.2	271.2	271.1	271.2	271.4
5,0°	274.1	274.0	274.4	271.9	270.1	269.9	268.3	270.2	270.2	270.8	270.6	270.2	268.6
7,5°	279.4	277.3	274.8	274.9	272.6	273.0	273.3	271.7	269.4	269.4	269.0	268.1	269.4
10,0°	280.5	276.6	274.8	277.0	280.8	278.6	272.2	269.6	269.1	273.3	273.9	275.3	275.6
12,5°	289.2	286.8	282.7	281.0	277.9	277.4	280.6	282.2	279.8	279.6	278.5	279.4	279.1
15,0°	288.1	289.0	288.6	282.0	281.9	284.6	284.1	287.9	291.2	290.4	290.4	287.4	286.6
17,5°	286.5	287.8	285.5	285.9	286.0	290.2	291.3	295.8	292.3	291.9	293.7	291.6	289.1
20,0°	291.5	292.4	288.6	292.7	293.0	298.5	297.4	298.5	297.9	297.2	297.4	296.1	295.5
22,5°	294.2	287.4	289.6	295.1	298.6	301.7	301.5	304.4	301.6	303.0	304.1	302.2	302.9
25,0°	290.1	291.1	297.6	301.1	304.1	306.9	304.1	310.9	311.8	314.8	310.7	306.6	305.0
27,5°	287.5	292.3	300.5	303.1	307.5	314.6	310.4	317.0	314.8	313.0	306.9	305.5	309.4
30,0°	292.0	294.2	306.8	308.2	318.6	321.3	321.7	325.9	317.9	312.7	313.6	314.2	314.2
32,5°	296.6	303.4	310.5	316.2	324.8	328.0	325.1	324.3	321.7	320.6	319.3	318.8	318.9
35,0°	293.7	307.9	314.0	322.5	330.7	330.2	333.2	331.9	324.2	323.3	323.9	327.2	329.1
37,5°	303.1	313.9	324.1	334.6	336.2	339.9	336.6	332.6	330.2	336.0	331.7	335.5	336.0
40,0°	308.1	323.2	333.3	337.1	341.8	344.1	345.3	335.2	345.8	340.1	337.1	341.4	336.8
42,5°	310.4	331.9	338.8	346.6	352.2	343.4	360.7	346.8	357.8	348.2	345.1	344.2	337.4
45,0°	314.3	336.1	345.1	351.3	352.5	350.5	355.5	355.4	363.9	365.9	352.7	349.6	341.3
47,5°	314.4	339.7	350.1	358.2	355.5	358.5	354.9	364.8	369.6	371.3	360.1	351.7	330.9
50,0°	313.6	338.4	355.7	357.1	362.9	365.7	359.9	376.6	390.1	379.0	360.1	337.0	305.4
52,5°	310.1	339.8	351.2	364.1	368.6	376.4	380.3	400.7	411.0	378.8	346.4	308.8	268.0
55,0°	309.7	336.3	357.1	363.3	377.6	395.3	407.2	415.4	395.9	359.4	318.0	267.3	223.8
57,5°	310.0	338.2	361.6	380.5	390.8	408.7	436.4	415.4	373.0	331.3	278.8	218.4	176.1
60,0°	313.9	356.4	381.1	402.5	421.8	447.8	434.4	387.7	349.1	287.7	221.2	169.0	149.6
62,5°	324.3	374.3	410.6	432.6	463.2	465.3	416.3	360.4	308.4	234.2	182.3	158.2	147.0
65,0°	330.8	392.8	440.0	467.1	483.1	450.2	389.2	326.5	265.4	207.0	179.3	149.5	120.1
67,5°	331.5	403.9	453.0	489.0	470.7	422.7	366.6	305.3	256.5	211.8	158.8	115.9	86.0
70,0°	323.2	394.9	447.7	461.5	422.9	385.2	351.0	344.3	283.9	188.9	118.3	74.2	48.5
72,5°	316.1	359.3	401.7	388.4	373.1	363.3	394.6	409.8	286.0	144.6	69.3	39.5	28.1
75,0°	244.1	257.5	289.2	299.7	316.8	366.8	438.0	374.9	196.5	72.3	32.2	23.3	21.1
77,5°	127.1	147.2	181.9	217.4	238.2	288.7	316.5	219.1	70.5	28.0	20.6	17.9	17.0
80,0°	33.5	53.0	71.3	80.0	84.1	96.1	90.3	66.5	20.1	17.3	16.8	12.6	12.6
82,5°	6.2	9.7	17.5	24.9	29.9	37.4	35.4	17.1	10.8	10.9	11.3	8.2	8.1
85,0°	1.2	1.4	2.0	2.7	3.3	4.8	5.6	4.1	4.1	4.6	5.2	4.0	3.9
87,5°	0.3	0.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1	1.2	1.5	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	271.5	272.2	271.7	270.4	271.3	272.5	277.7	275.7	275.6	274.8	274.5	271.8	269.8
5,0°	268.1	267.6	267.2	266.5	266.4	264.7	276.0	275.8	273.8	271.3	270.7	265.9	261.6
7,5°	270.3	271.6	268.7	269.2	266.8	266.3	278.8	275.9	273.3	272.2	266.5	262.4	258.5
10,0°	279.4	277.9	273.7	272.9	271.2	273.0	280.7	276.5	269.2	264.4	259.9	255.3	249.5
12,5°	278.6	280.8	279.4	279.3	278.5	273.8	288.2	284.0	274.9	264.3	256.9	253.0	246.5
15,0°	285.1	284.0	283.9	287.7	288.0	286.1	289.0	286.8	275.9	263.3	253.3	246.3	239.9
17,5°	290.0	288.1	290.0	288.8	291.7	294.1	287.2	284.3	275.6	258.5	253.6	241.8	228.9
20,0°	293.4	292.3	296.4	290.0	290.0	292.8	293.7	285.3	273.7	258.3	246.8	237.9	222.9
22,5°	298.9	295.2	298.5	293.0	293.5	293.4	291.1	289.6	273.2	253.8	240.0	225.4	215.1
25,0°	303.5	300.9	298.5	297.3	296.1	297.7	289.2	283.4	273.0	251.9	234.0	219.6	206.1
27,5°	304.9	305.2	302.5	301.1	299.3	305.5	291.3	285.0	274.1	248.8	231.4	212.9	194.9
30,0°	312.7	305.3	305.5	302.9	307.6	302.7	288.7	284.3	265.7	245.1	225.0	207.3	188.4
32,5°	319.2	313.3	310.5	312.2	306.2	306.2	283.1	279.6	263.4	240.9	219.4	196.1	184.6
35,0°	323.5	319.3	312.4	309.8	305.1	299.3	286.6	274.8	263.2	233.8	209.8	191.2	183.1
37,5°	329.9	320.0	318.1	311.8	303.1	304.5	285.3	273.8	256.8	228.8	203.4	183.6	178.0
40,0°	326.8	319.2	316.0	314.5	307.7	304.6	283.4	268.2	254.7	221.7	195.2	181.8	177.4
42,5°	328.9	324.7	313.0	313.8	302.9	300.2	281.7	262.2	243.7	213.5	188.7	181.1	170.7
45,0°	329.9	314.5	297.4	287.6	275.9	276.6	282.8	256.2	236.6	207.6	182.1	178.0	160.5
47,5°	308.8	280.5	261.8	246.2	234.1	234.1	281.8	246.6	228.8	198.6	177.3	171.6	143.5
50,0°	269.9	239.9	221.1	206.5	191.4	192.8	272.7	241.8	218.0	191.2	173.4	161.4	125.2
52,5°	227.6	201.2	180.4	164.6	155.8	152.3	269.6	232.4	205.8	183.3	167.5	141.2	105.0
55,0°	184.5	161.5	142.3	135.6	131.5	128.0	268.2	229.8	198.7	172.6	162.6	121.1	89.1
57,5°	150.6	141.1	134.8	129.7	120.0	120.9	267.6	224.3	189.9	170.2	151.9	105.1	75.3
60,0°	141.3	133.7	123.7	113.7	110.2	105.4	266.2	219.0	182.8	168.7	145.2	84.3	62.4
62,5°	128.2	112.1	99.9	90.0	86.2	82.4	261.4	213.3	174.7	160.5	141.7	72.1	56.8
65,0°	99.2	79.4	68.2	59.3	54.4	55.5	258.5	201.1	162.6	150.0	126.5	62.8	50.1
67,5°	61.3	47.3	40.9	38.1	35.3	36.4	247.6	187.6	145.7	130.3	103.1	53.3	43.3
70,0°	35.3	31.8	30.3	27.9	27.8	26.8	240.7	174.2	128.1	108.1	85.0	47.0	35.7
72,5°	25.9	25.3	24.5	22.6	23.1	21.7	230.1	158.9	112.6	89.8	64.6	36.7	31.7
75,0°	20.7	20.5	19.8	18.7	18.3	18.0	194.3	130.2	78.9	63.6	43.0	28.7	26.2
77,5°	16.6	16.2	15.3	14.6	14.3	14.6	118.7	58.0	20.8	29.3	25.7	17.5	17.8
80,0°	11.9	12.1	11.0	10.7	10.4	10.4	32.3	9.7	6.1	12.2	12.9	9.1	9.1
82,5°	8.0	7.6	7.6	7.4	6.9	6.2	5.0	2.7	2.9	3.9	4.1	3.0	1.6
85,0°	3.7	4.1	4.1	3.7	3.3	3.0	1.2	1.0	1.0	0.7	0.6	0.5	0.2
87,5°	1.1	1.3	1.2	1.1	1.0	1.0	0.3	0.2	0.2	0.2	0.1	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	0.4	0.4
2,5°	268.5	268.9	268.2	267.9	268.1	267.2	267.4	267.3	267.8	267.2	267.4	3.2	3.7
5,0°	258.3	254.5	252.2	250.1	250.6	249.2	250.4	252.1	254.6	253.9	255.1	6.3	10.0
7,5°	253.2	249.6	246.9	243.4	241.8	240.1	238.5	238.0	237.2	236.5	235.9	9.4	19.4
10,0°	246.6	241.3	236.8	232.4	231.2	227.8	225.6	222.2	220.8	221.0	221.4	12.4	31.8
12,5°	242.7	233.6	227.3	222.1	217.3	215.3	212.9	212.5	209.4	207.8	209.0	15.4	47.2
15,0°	233.0	224.6	215.3	210.9	206.2	200.4	196.3	196.0	195.2	190.0	189.7	18.4	65.6
17,5°	223.4	215.6	205.0	198.1	192.0	188.0	182.3	180.3	179.7	177.1	177.0	21.1	86.7
20,0°	214.7	202.7	194.1	186.2	181.6	179.9	175.0	171.4	172.3	169.2	166.4	23.9	110.6
22,5°	204.1	193.6	184.4	178.0	171.6	170.7	170.7	168.1	164.5	164.2	163.2	26.7	137.3
25,0°	189.5	182.2	178.9	173.9	167.7	164.7	164.2	162.4	163.3	162.0	159.6	29.4	166.7
27,5°	186.1	181.6	171.6	167.3	164.1	158.7	157.7	154.0	150.5	149.0	147.0	32.0	198.7
30,0°	181.3	178.3	168.4	164.0	159.7	154.5	144.9	141.4	133.3	128.4	127.6	34.5	233.3
32,5°	177.7	168.8	163.3	159.4	151.2	146.4	135.1	123.5	114.9	107.7	107.0	36.9	270.1
35,0°	178.3	165.2	156.5	148.1	142.4	131.6	119.3	106.1	96.7	90.9	87.8	39.0	309.1
37,5°	171.2	159.1	148.6	141.6	129.9	113.6	100.4	89.5	80.3	75.0	73.4	41.2	350.3
40,0°	161.1	148.6	139.0	131.3	114.8	96.2	81.8	73.1	68.4	65.6	64.8	43.1	393.4
42,5°	151.2	140.3	126.0	117.4	100.5	81.3	70.4	66.6	62.3	61.2	60.6	45.0	438.4
45,0°	137.4	125.8	116.7	102.3	84.9	69.6	62.1	58.5	57.5	58.4	58.8	46.2	484.6
47,5°	122.6	111.6	104.9	87.4	70.5	62.3	56.9	55.3	55.3	54.1	55.2	46.5	531.1
50,0°	105.9	101.5	94.5	74.3	62.2	56.1	53.6	51.7	51.0	50.8	49.9	46.3	577.4
52,5°	92.1	89.6	74.0	62.8	54.7	52.6	50.1	48.1	46.4	46.3	45.2	45.6	623.0
55,0°	80.1	75.2	59.7	53.1	49.2	47.3	46.2	43.5	42.4	41.7	40.8	44.6	667.6
57,5°	72.2	65.6	52.2	46.3	45.2	44.5	42.2	40.0	38.3	37.8	37.8	43.9	711.6
60,0°	64.9	53.5	45.3	42.3	42.0	42.0	39.0	37.8	35.5	34.7	35.5	43.4	755.0
62,5°	58.2	46.5	40.2	38.0	38.7	38.9	37.6	35.3	31.6	31.2	30.9	42.7	797.7
65,0°	48.5	38.6	35.4	35.0	33.2	33.2	32.2	30.1	27.6	26.1	25.9	41.1	838.8
67,5°	40.0	33.3	30.7	28.8	28.4	27.4	25.8	22.4	19.4	17.8	17.3	38.7	877.5
70,0°	33.9	28.1	26.6	25.0	23.5	19.0	16.2	11.9	9.1	7.5	6.5	36.0	913.6
72,5°	26.8	22.8	22.0	19.8	14.7	10.1	6.8	4.3	3.5	3.1	3.2	33.2	946.7
75,0°	21.1	16.5	14.5	11.7	7.0	3.9	2.7	1.7	1.5	1.6	1.9	27.1	973.8
77,5°	13.6	9.9	6.4	3.8	2.2	1.3	1.2	0.7	0.6	0.8	1.1	17.1	991.0
80,0°	5.6	2.8	1.3	0.3	0.4	0.2	0.2	0.3	0.2	0.3	0.5	6.1	997.1
82,5°	0.8	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	2.2	999.3
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 50 mini LED	Order number: 5XA248D41F08JE EAN: 4058352803318	LP number 59078_153
----------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	10300	62.6	65.3	64.0
95	241	252	9773	58.7	61.2	60.0
90	229	250	9286	55.3	57.6	56.4
85	216	248	8759	51.6	53.8	52.7
80	203	246	8232	48.1	50.0	49.0
75	190	243	7705	44.6	46.4	45.5
70	178	241	7218	41.5	43.2	42.4
65	165	238	6691	38.3	39.7	39.0
60	152	235	6164	35.1	36.4	35.8
55	140	232	5677	32.1	33.4	32.8
50	127	229	5150	29.0	30.2	29.6
45	114	225	4623	26.0	27.0	26.5
40	102	221	4136	23.2	24.1	23.6
35	89	216	3609	20.3	21.1	20.7
30	76	210	3082	17.5	18.1	17.8
25	63	203	2555	14.8	15.3	15.0
20	51	195	2068	12.3	12.7	12.5
15	38	184	1541	9.6	10.0	9.8
11	28	173	1135	7.7	7.8	7.8