
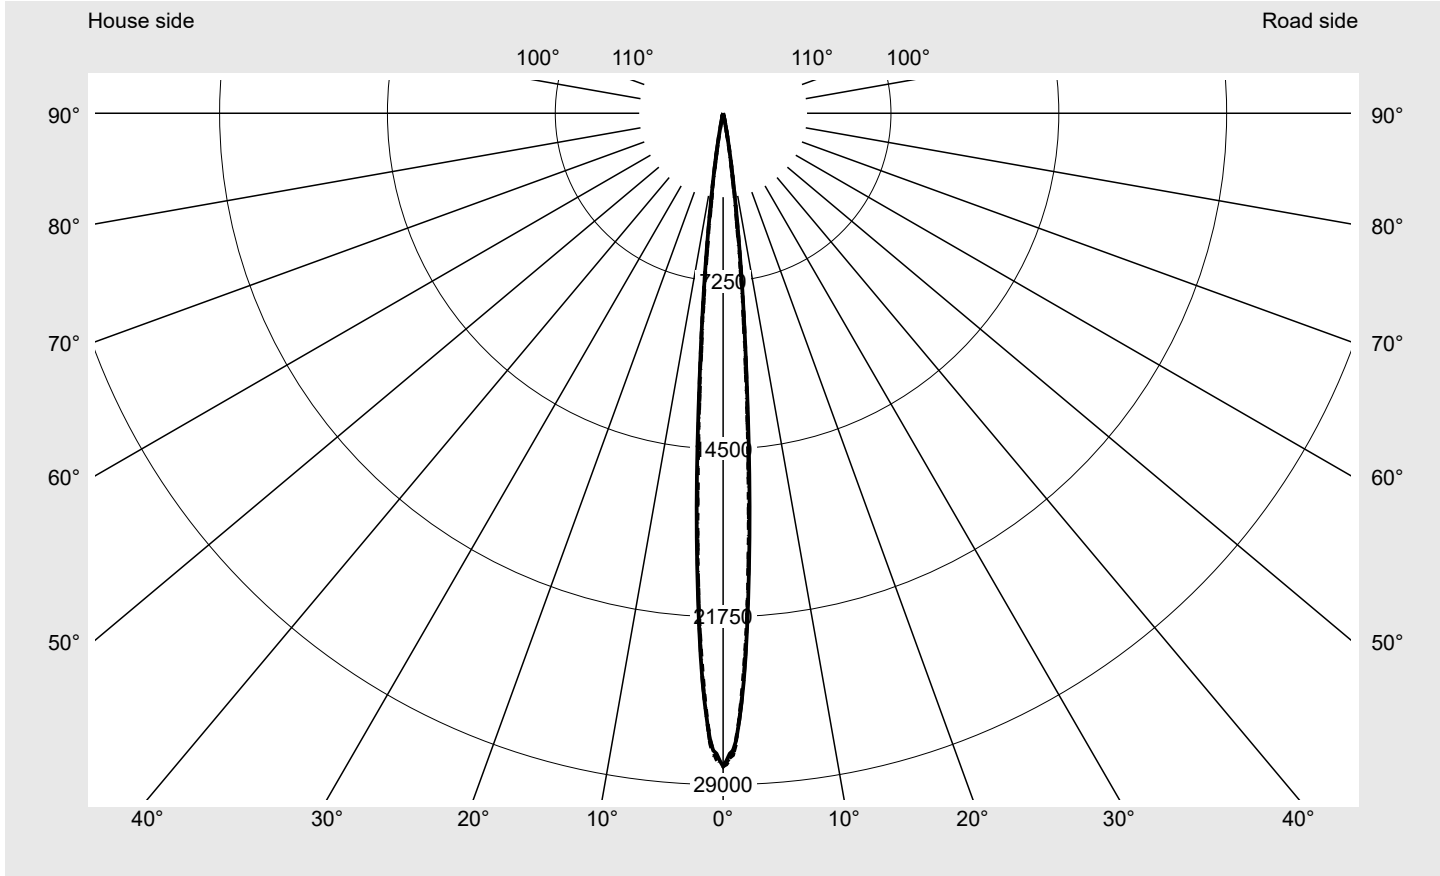


Photometric test report

Family Floodlight FL11 	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
	Version standard bracket Optic symmetric distribution RS4 Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 189880 lm Power consumption = 1425.5 W Luminous efficacy = 133.2 lm/W	serial documentation 06.09.2023

Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 28210 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	14.0
Imax 80°	6.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 0°** **siteco**

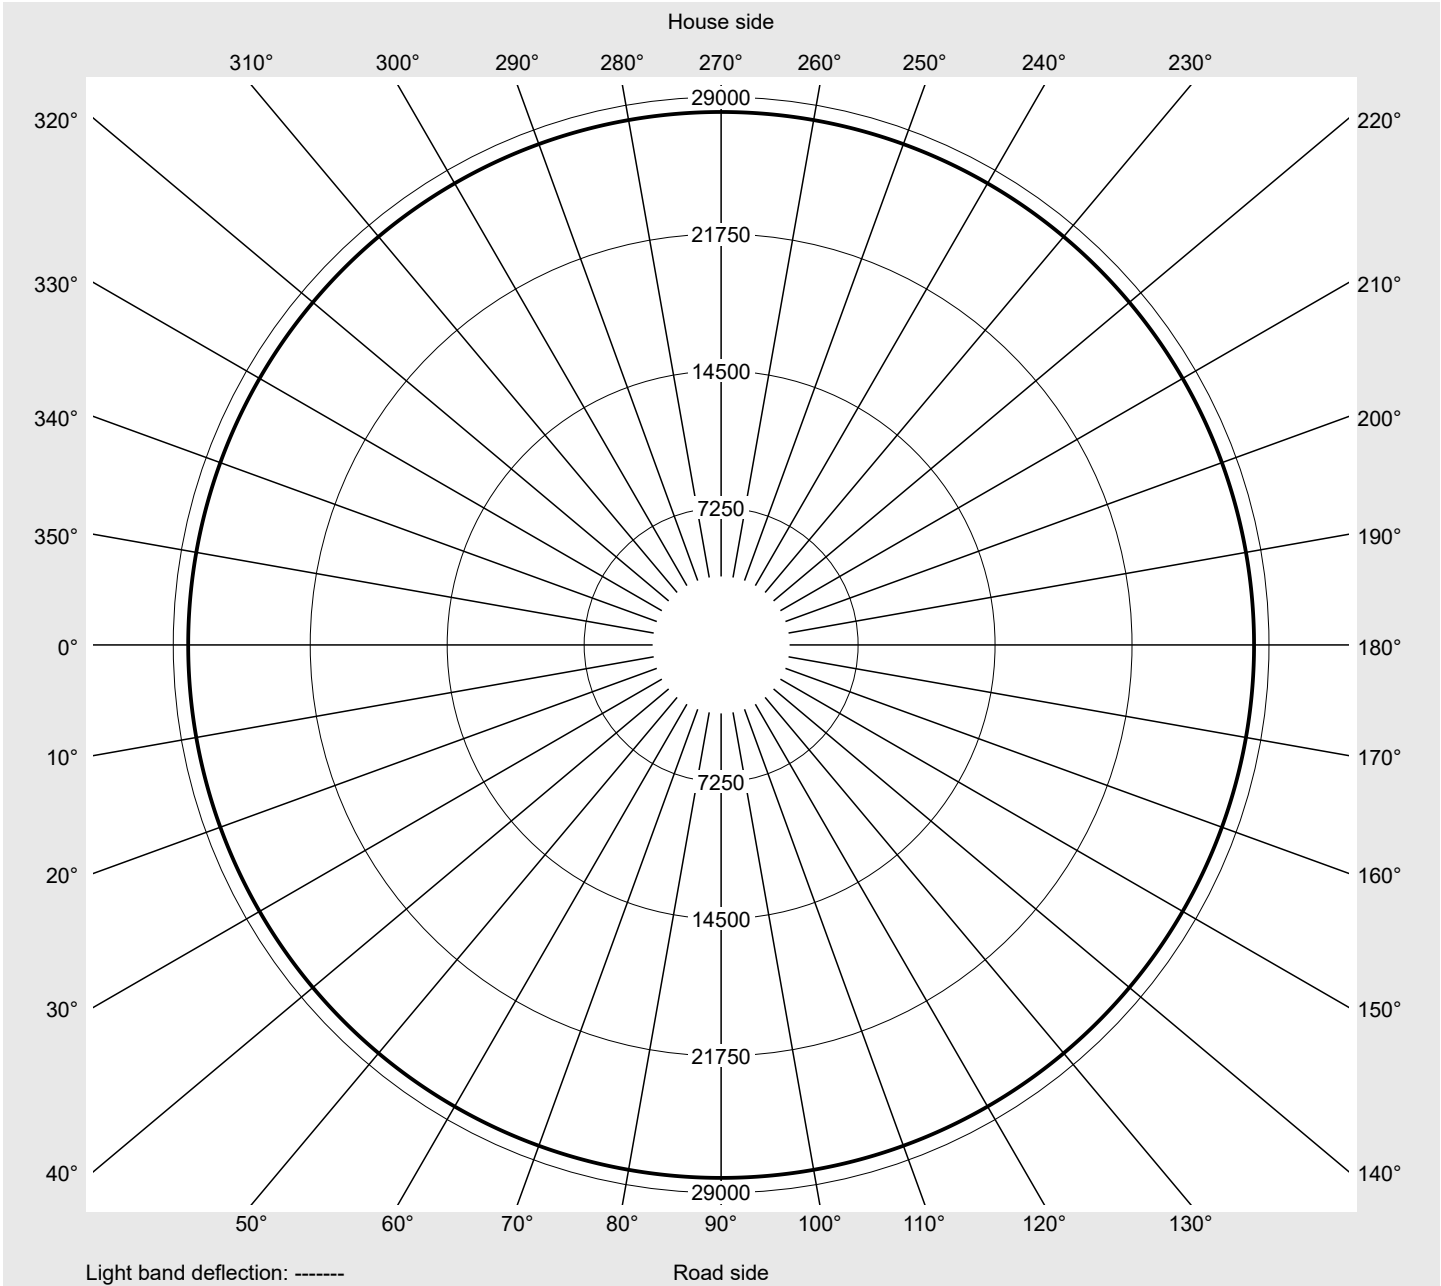

Photometric test report

Family Floodlight FL11	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
----------------------------------	--	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3
0,5°	27726.4	27992.9	27732.1	27998.7	27737.9	27998.7	27806.6	28024.5	27769.4	28041.7
1,0°	27422.6	27414.0	27448.4	27422.6	27457.0	27425.5	27474.2	27448.4	27497.1	27459.9
1,5°	26299.1	26233.2	26310.6	26230.3	26293.4	26233.2	26307.7	26247.5	26304.8	26241.8
2,0°	24825.9	24522.1	24828.8	24519.3	24814.5	24522.1	24817.3	24530.7	24820.2	24507.8
3,0°	20807.7	20566.9	20773.3	20544.0	20764.7	20532.6	20779.0	20509.6	20704.5	20446.6
4,0°	16330.9	15663.1	16276.4	15645.9	16276.4	15654.5	16279.3	15640.2	16219.1	15562.8
5,0°	11768.1	11581.8	11791.0	11587.5	11822.6	11636.3	11854.1	11639.1	11831.2	11587.5
6,0°	8292.1	8219.9	8314.2	8256.9	8373.5	8328.5	8438.6	8383.8	8459.2	8324.2
7,0°	5582.5	5471.9	5600.0	5524.1	5688.9	5639.0	5786.3	5693.7	5780.9	5655.3
8,0°	3591.2	3538.2	3625.9	3604.7	3746.5	3755.1	3895.3	3890.4	3964.4	3889.8
9,0°	2245.3	2224.9	2278.2	2284.3	2371.7	2403.5	2516.7	2564.6	2651.1	2631.9
10,0°	1313.2	1276.5	1338.2	1349.3	1427.9	1501.0	1557.7	1589.8	1666.3	1658.6
15,0°	153.9	151.5	153.7	151.9	156.5	156.8	163.2	163.9	170.4	168.4
20,0°	72.2	70.0	71.4	68.3	69.2	66.5	67.8	65.4	67.4	65.1
30,0°	34.1	34.1	34.1	33.8	33.0	33.3	33.6	33.3	33.1	33.0
45,0°	34.6	33.0	33.8	34.0	33.6	32.5	32.0	31.3	31.1	31.4
60,0°	22.8	23.3	24.9	26.3	21.8	19.9	18.9	18.6	19.2	19.1
75,0°	10.0	9.2	8.5	8.2	8.6	8.9	8.8	8.1	8.3	8.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
---	--	-------------------------------------

sitEco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°				
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	1.7	1.7
0,5°	27786.6	28067.5	27806.6	28093.3	27849.6	28119.0	27869.7	28127.6	27881.2	27881.2	13.4	15.0
1,0°	27508.6	27479.9	27534.4	27500.0	27563.0	27520.0	27586.0	27525.8	27606.0	27606.0	26.3	41.4
1,5°	26276.2	26244.6	26313.4	26250.4	26299.1	26253.2	26310.6	26244.6	26310.6	26310.6	37.7	79.1
2,0°	24780.1	24487.7	24794.4	24464.8	24774.3	24447.6	24765.7	24433.3	24757.1	24757.1	75.2	154.2
3,0°	20650.1	20377.8	20578.4	20309.0	20532.6	20248.8	20483.8	20223.0	20498.2	20498.2	117.9	272.1
4,0°	16150.3	15462.5	16024.2	15319.2	15909.6	15175.9	15815.0	15135.7	15809.3	15809.3	120.8	392.9
5,0°	11742.3	11438.5	11553.1	11243.6	11372.6	11108.9	11240.7	11011.5	11229.3	11229.3	110.2	503.1
6,0°	8299.9	8174.0	8239.1	7966.3	8043.3	7775.1	7897.2	7682.8	7869.1	7869.1	93.8	596.9
7,0°	5698.3	5534.7	5550.7	5338.6	5313.1	5085.6	5105.3	4937.1	5017.9	5017.9	73.3	670.2
8,0°	3904.7	3783.2	3740.8	3552.5	3466.2	3283.9	3249.3	3152.1	3198.0	3198.0	55.5	725.6
9,0°	2617.3	2503.8	2416.7	2267.6	2190.8	2085.1	2056.4	2005.7	2022.3	2022.3	40.2	765.9
10,0°	1658.6	1560.9	1502.1	1391.0	1340.3	1263.2	1226.7	1184.2	1181.6	1181.6	89.8	855.6
15,0°	168.9	158.6	154.8	146.8	144.7	139.0	139.0	135.4	137.1	137.1	21.8	877.4
20,0°	66.6	64.0	65.5	63.5	65.0	63.1	65.0	63.3	65.2	65.2	19.8	897.2
30,0°	33.1	33.2	33.5	33.1	32.6	32.6	32.6	32.7	32.7	32.7	23.6	920.8
45,0°	31.1	30.9	31.1	31.2	31.6	31.8	31.5	30.8	31.6	31.6	37.1	957.9
60,0°	19.1	18.6	18.5	18.2	18.0	21.1	20.5	19.4	19.2	19.2	28.9	986.8
75,0°	8.0	7.6	8.3	8.3	8.0	7.6	7.7	8.2	8.7	8.7	13.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	189880	1425.5
95	232	251	180590	1297.9
90	213	248	170985	1188.0
85	196	245	161361	1090.3
80	181	242	151992	1003.6
75	167	239	142668	922.5
70	153	235	133262	842.9
65	139	232	123156	764.2
60	127	229	114279	696.9
55	115	225	104429	629.9
50	103	221	95178	563.3
45	90	216	85058	491.7
40	79	211	75544	431.9
35	69	206	66672	377.6
30	58	200	56844	317.3
25	47	192	47497	258.0
20	38	184	38147	210.5
15	28	173	28684	157.9
10	19	159	19296	111.2
5	9	132	9710	59.2
1	2	77	2604	21.2

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
93	219	249	168199	1214.1
90	209	247	163278	1156.4
85	192	244	153977	1058.7
80	176	241	144968	966.7
75	162	238	136102	886.6
70	149	235	127104	813.3
65	135	231	117655	735.1
60	123	228	109039	668.6
55	112	224	99856	608.1
50	98	219	90404	530.4
45	88	215	81837	476.2
40	77	210	72660	416.8
35	66	205	63177	356.7
30	56	199	54108	303.2
25	46	192	45852	250.0
20	36	183	35897	197.8
15	27	172	27450	151.2
10	18	157	18282	104.4
5	8	127	8654	53.3
1	2	77	2582	20.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779427Q01AA EAN: 4058352847657	LP number 59465_35
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	189880.0	1425.5
25.0	168810.0	1221.6