




Photometric test report

Family Licross® 11 Protected	Order number: 51TD12DN495G3S EAN: 4058352934647	LP number 58524_272
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 9980 lm Power consumption = 60.9 W Luminous efficacy = 163.9 lm/W	serial documentation 29.09.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 631 cd/klm**

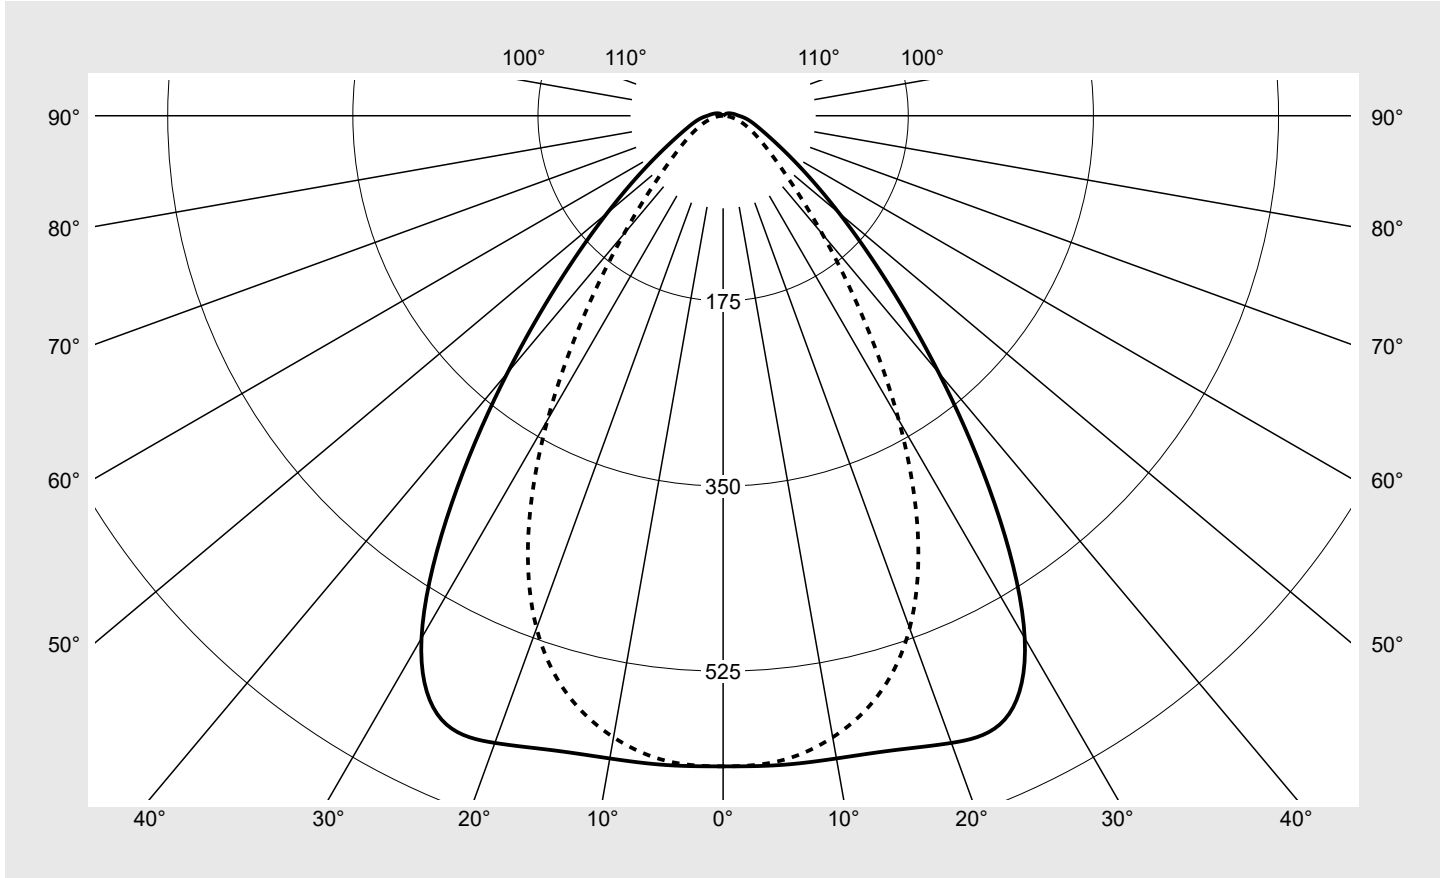

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12DN495G3S EAN: 4058352934647	LP number 58524_272
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12DN495G3S EAN: 4058352934647	LP number 58524_272
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.3	22.7	21.6	23.0	23.3	18.0	19.4	18.4	19.7	20.1
	3H	21.7	22.9	22.1	23.3	23.6	18.4	19.6	18.7	20.0	20.3
	4H	21.9	23.1	22.3	23.4	23.8	18.5	19.7	18.9	20.1	20.4
	6H	22.2	23.3	22.6	23.6	24.0	18.6	19.7	19.0	20.1	20.5
	8H	22.4	23.4	22.9	23.7	24.1	18.7	19.7	19.1	20.1	20.5
12H	22.6	23.5	23.0	23.8	24.3	18.7	19.7	19.2	20.1	20.5	
4H	2H	21.3	22.5	21.7	22.9	23.2	18.5	19.7	18.9	20.0	20.4
	3H	21.9	22.9	22.3	23.3	23.7	19.0	20.0	19.4	20.4	20.8
	4H	22.2	23.1	22.6	23.5	23.9	19.2	20.1	19.7	20.5	21.0
	6H	22.6	23.4	23.1	23.8	24.3	19.4	20.2	19.9	20.6	21.1
	8H	22.9	23.5	23.3	24.0	24.5	19.5	20.2	20.0	20.6	21.1
12H	23.1	23.7	23.6	24.2	24.7	19.6	20.2	20.0	20.6	21.1	
8H	4H	22.2	22.9	22.7	23.4	23.8	19.5	20.1	19.9	20.6	21.1
	6H	22.7	23.3	23.2	23.8	24.3	19.7	20.3	20.2	20.8	21.3
	8H	23.0	23.5	23.5	24.0	24.5	19.9	20.4	20.4	20.8	21.4
	12H	23.4	23.8	23.9	24.3	24.9	20.0	20.4	20.5	20.9	21.4
12H	4H	22.2	22.8	22.7	23.3	23.8	19.5	20.1	20.0	20.6	21.1
	6H	22.7	23.2	23.2	23.7	24.2	19.9	20.3	20.4	20.8	21.3
	8H	23.1	23.5	23.6	24.0	24.5	20.0	20.4	20.5	20.9	21.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		22419.2	23827.1	26079.1	23479.7	16666.3	12379.1	11497.0	
50°		16052.7	17153.2	19157.6	17081.1	11953.8	9053.3	8615.6	
55°		11755.6	12507.8	13979.7	12268.5	8728.8	7051.2	6979.6	
60°		8995.0	9409.2	10266.7	9100.9	6762.0	5797.9	5958.4	
65°		7390.6	7532.5	7803.3	6981.6	5548.7	4988.7	5257.1	
70°		6572.2	6491.0	6234.7	5618.9	4783.4	4414.2	4742.2	
75°		6283.0	5993.5	5331.2	4737.0	4223.6	3914.8	4257.8	
80°		6351.6	5912.3	4961.1	4209.1	3800.3	3511.6	3785.2	
85°		6715.4	6205.2	5032.3	4126.9	3630.9	3209.5	3418.2	


Photometric test report

Family Licross® 11 Protected	Order number: 51TD12DN495G3S EAN: 4058352934647	LP number 58524_272
---	--	--------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

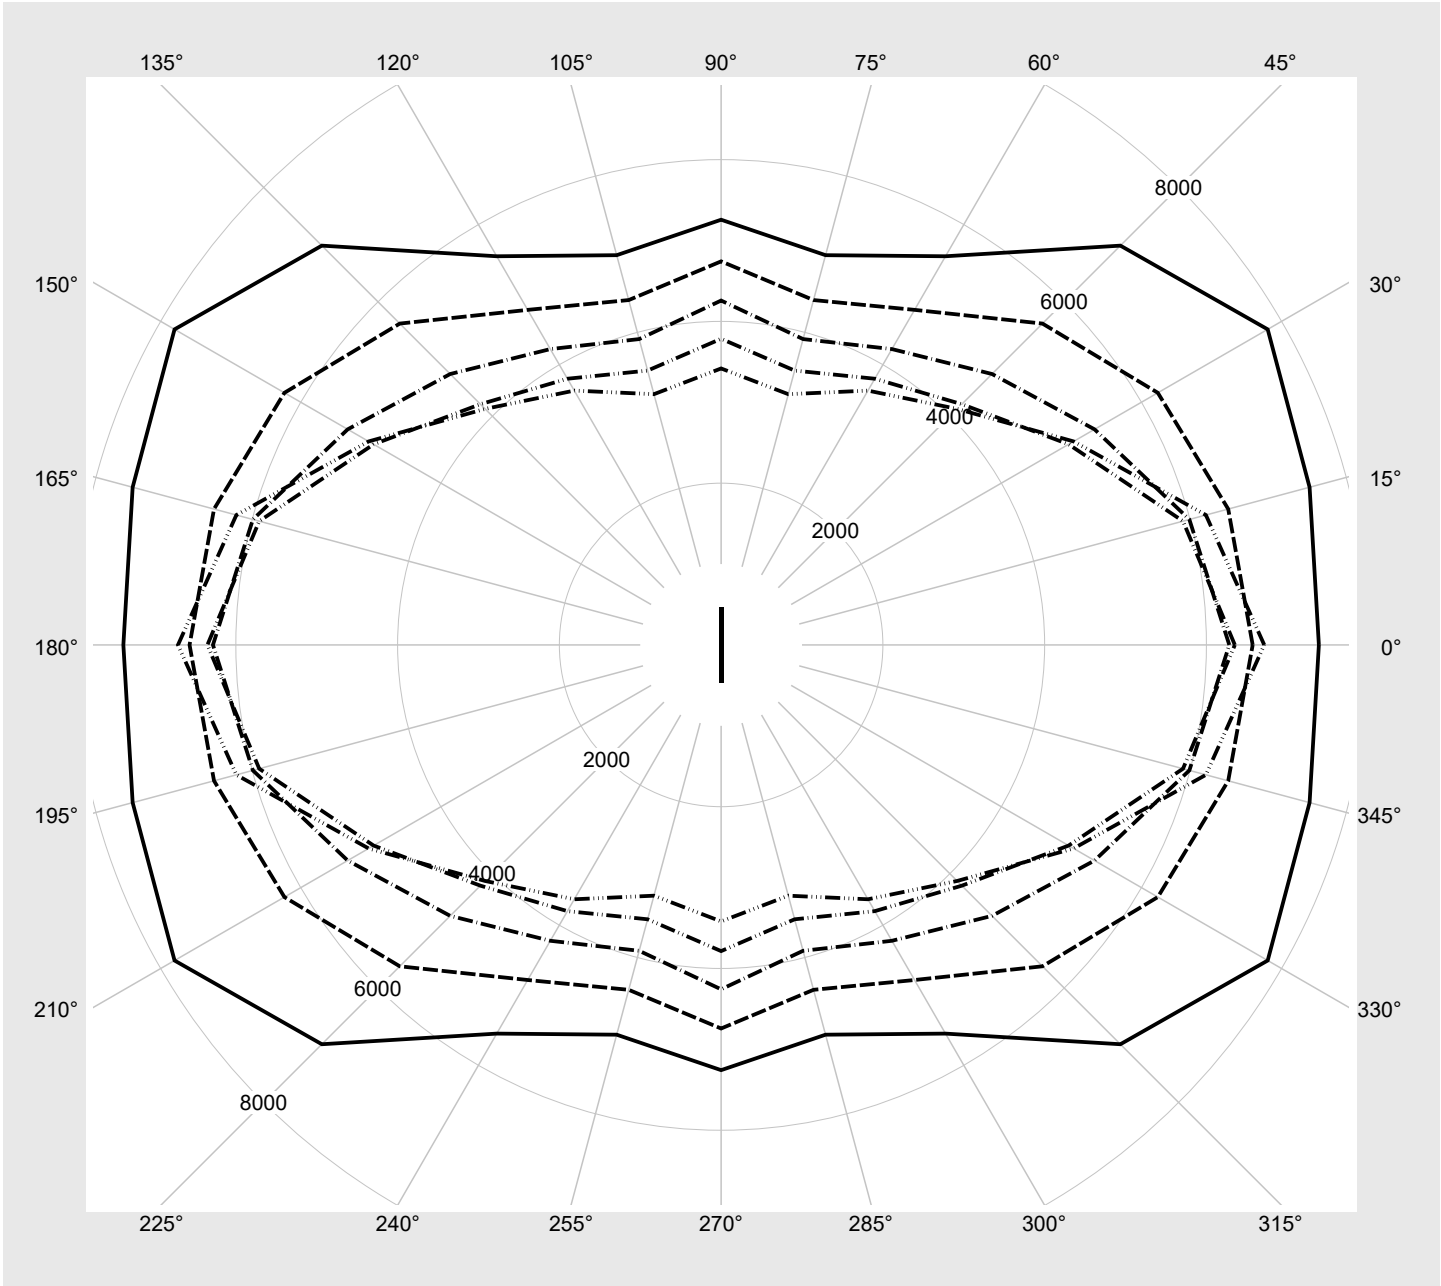

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12DN495G3S EAN: 4058352934647	LP number 58524_272
---	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9980	60.9
95	240	252	9474	57.6
90	226	250	8964	54.5
85	213	248	8483	51.5
80	200	245	8000	48.6
75	186	243	7475	45.5
70	173	240	6982	42.5
65	160	237	6485	39.7
60	147	234	5984	36.8
55	134	231	5480	33.9
50	122	227	5007	31.3
45	109	223	4493	28.5
40	96	218	3975	25.8
35	84	213	3492	23.3
30	72	208	3002	20.8
25	60	201	2512	18.3
20	47	192	1975	15.5
15	36	182	1517	13.2
10	24	168	1013	10.7
5	12	142	503	8.3
2	4	102	162	6.8