


Photometric test report

Family Licross® 11 Protected	Order number: 51TD12MN4AXG EAN: 4058352928721	LP number 58524_284
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 10020 lm Power consumption = 55.3 W Luminous efficacy = 181.2 lm/W	serial documentation 11.10.2023
		

Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 631 cd/klm**

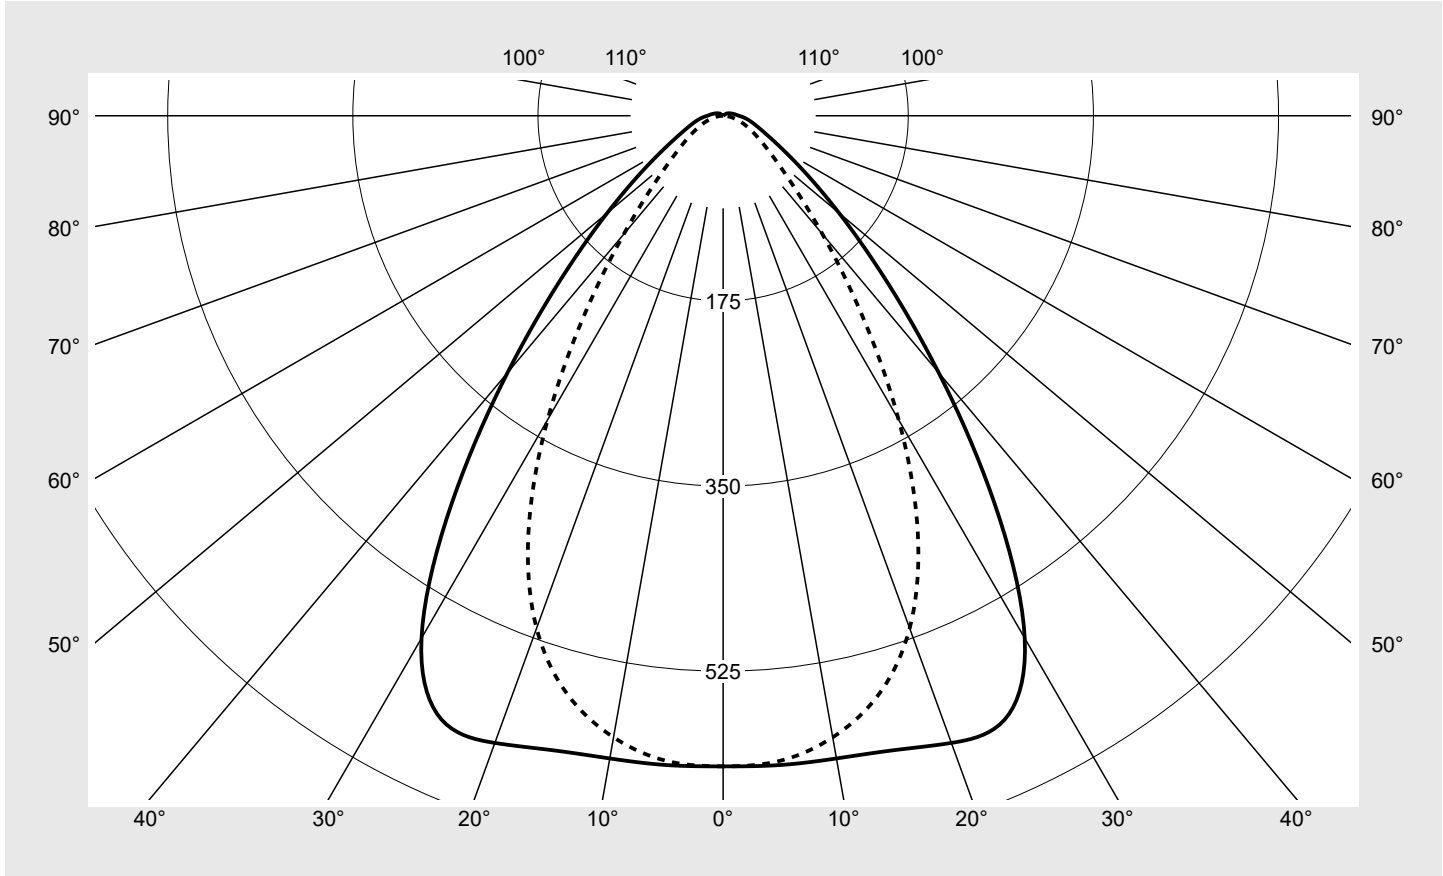

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12MN4AXG EAN: 4058352928721	LP number 58524_284
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12MN4AXG EAN: 4058352928721	LP number 58524_284
--	--	-------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.3	22.7	21.6	23.0	23.3	18.0	19.4	18.4	19.8	20.1
	3H	21.7	23.0	22.1	23.3	23.6	18.4	19.6	18.7	20.0	20.3
	4H	21.9	23.1	22.3	23.4	23.8	18.5	19.7	18.9	20.1	20.4
	6H	22.2	23.3	22.6	23.6	24.0	18.6	19.8	19.1	20.1	20.5
	8H	22.5	23.4	22.9	23.8	24.2	18.7	19.7	19.2	20.1	20.5
	12H	22.6	23.5	23.1	23.9	24.3	18.8	19.7	19.2	20.1	20.5
4H	2H	21.3	22.5	21.7	22.9	23.3	18.6	19.7	18.9	20.1	20.4
	3H	21.9	22.9	22.3	23.3	23.7	19.0	20.0	19.5	20.4	20.8
	4H	22.2	23.1	22.7	23.5	23.9	19.2	20.1	19.7	20.5	21.0
	6H	22.6	23.4	23.1	23.8	24.3	19.4	20.2	19.9	20.6	21.1
	8H	22.9	23.5	23.3	24.0	24.5	19.5	20.2	20.0	20.7	21.1
	12H	23.2	23.7	23.6	24.2	24.7	19.6	20.2	20.1	20.6	21.1
8H	4H	22.2	22.9	22.7	23.4	23.9	19.5	20.1	19.9	20.6	21.1
	6H	22.7	23.3	23.2	23.8	24.3	19.8	20.3	20.3	20.8	21.3
	8H	23.0	23.5	23.5	24.0	24.6	19.9	20.4	20.4	20.9	21.4
	12H	23.4	23.8	24.0	24.3	24.9	20.0	20.4	20.5	20.9	21.4
12H	4H	22.2	22.8	22.7	23.3	23.8	19.5	20.1	20.0	20.6	21.1
	6H	22.7	23.2	23.2	23.7	24.2	19.9	20.3	20.4	20.8	21.3
	8H	23.1	23.5	23.6	24.0	24.5	20.0	20.4	20.5	20.9	21.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1480	H(C0) = 13	H(C180) = 13
						B = 78	H(C90) = 0	H(C270) = 0
C-planes	γ	0°	15°	30°	45°	60°	75°	90°
		180°	165°	150°	135°	120°	105°	270°
		195°	210°	225°	240°	255°	285°	
		345°	330°	315°	300°	285°		
Luminance in cd/m ²								
45°		22509.1	23922.6	26183.6	23573.8	16733.1	12428.7	11543.0
50°		16117.0	17222.0	19234.4	17149.6	12001.7	9089.6	8650.2
55°		11802.8	12557.9	14035.7	12317.7	8763.8	7079.4	7007.6
60°		9031.1	9446.9	10307.9	9137.4	6789.1	5821.2	5982.3
65°		7420.2	7562.7	7834.6	7009.6	5570.9	5008.7	5278.1
70°		6598.5	6517.0	6259.7	5641.4	4802.6	4431.9	4761.2
75°		6308.2	6017.5	5352.6	4756.0	4240.5	3930.5	4274.9
80°		6377.1	5936.0	4981.0	4225.9	3815.6	3525.7	3800.4
85°		6742.3	6230.1	5052.4	4143.5	3645.4	3222.4	3431.9

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12MN4AXG EAN: 4058352928721	LP number 58524_284
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

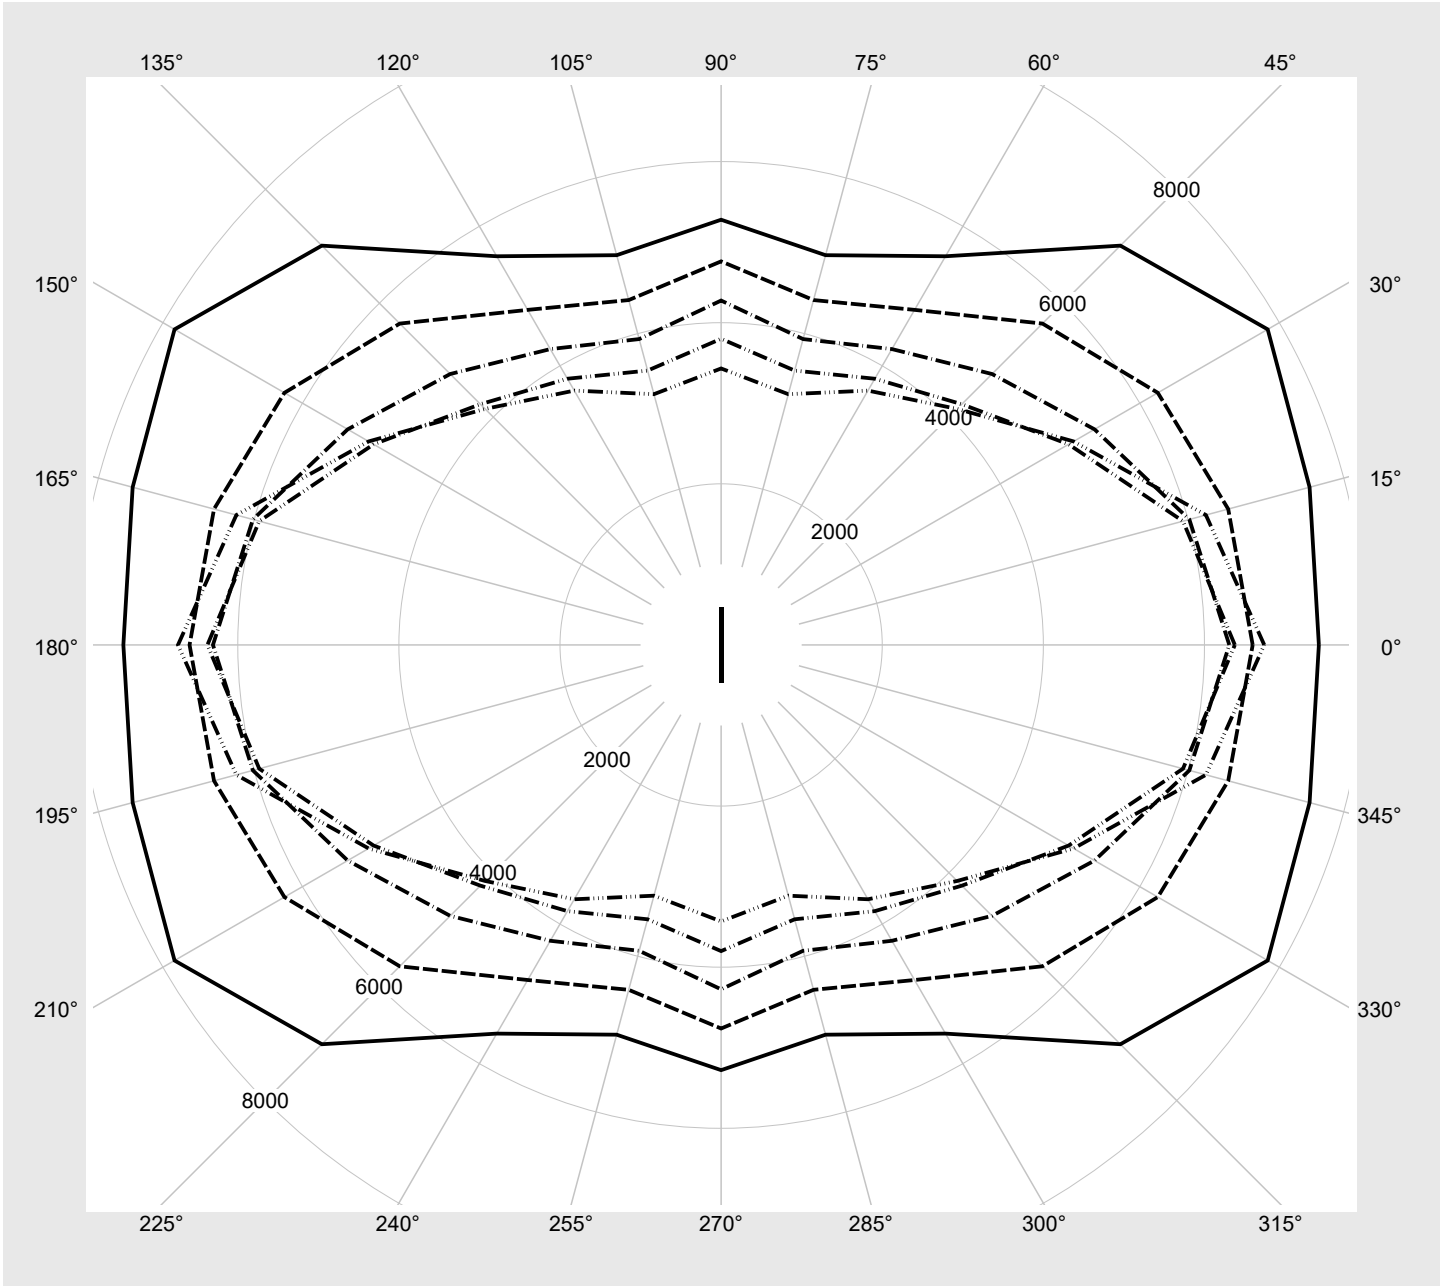

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12MN4AXG EAN: 4058352928721	LP number 58524_284
--	--	-------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	10020	55.3
2	A	C	F	9509	52.1
3	A	D	E	9072	49.4
4	A	D	F	8551	46.3
5	B	C	E	8018	43.1
6	B	C	F	7571	40.5
7	B	D	E	7028	37.4
8	B	D	F	6559	34.7