

Photometric test report

Family
Silica® 21 Ring

Order number: **5PJBI3D3104A**
EAN: **4058352960370**

LP number
59506_20



Version suspended luminaire incl. Pendant, black, inner ring side luminous, cover opal, polycarbonate, frosted, diffuse beam

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 6430 lm
Power consumption = 105.0 W
Luminous efficacy = 61.2 lm/W


serial
documentation
08.11.2023

siteco

Luminous intensity in cd/klm

C180-0

Imax: 93 cd/klm

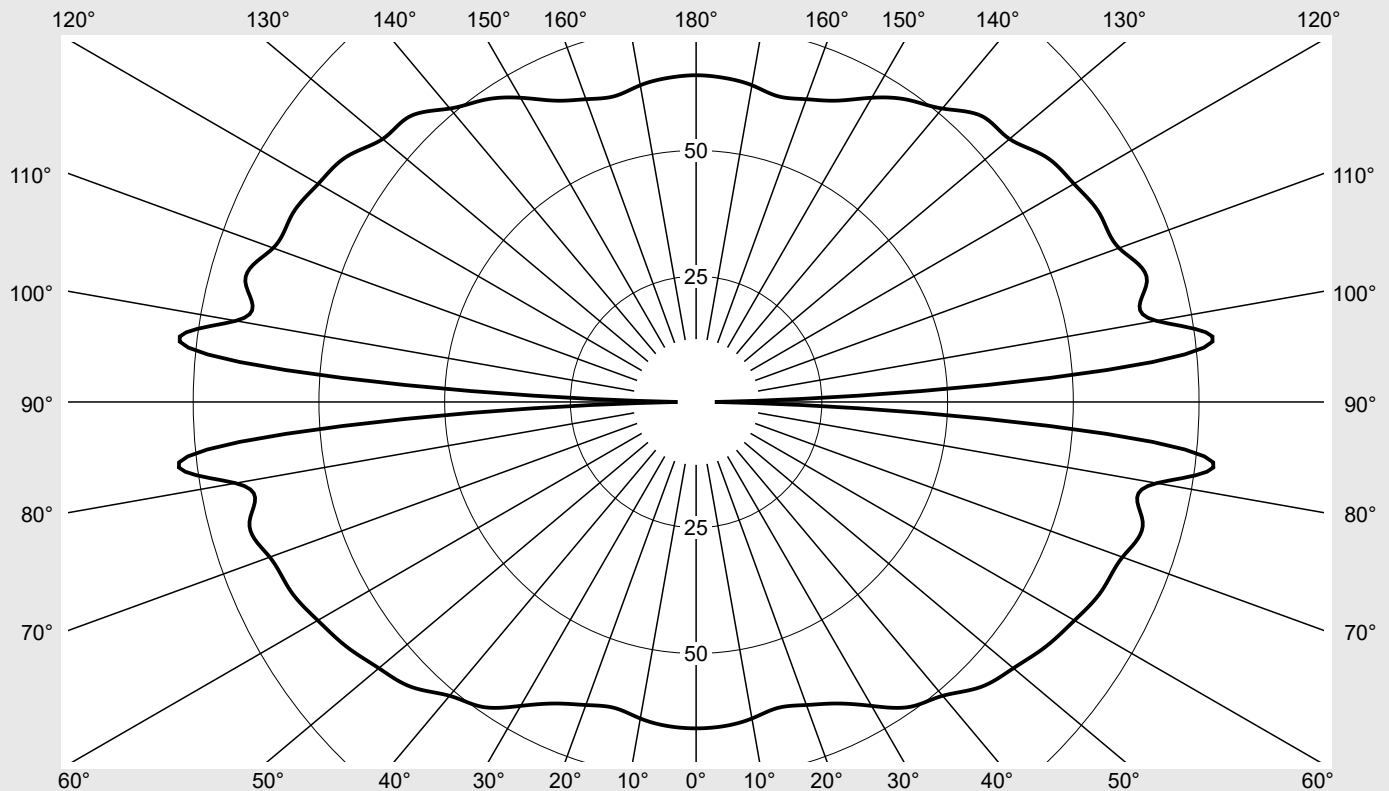

Classifications

DIN 5040 C 2 2
CIE N1=22 N2=48 N3=76
N4=50 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 50.0%
 ϕ_o 50.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 Ring	Order number: 5PJB13D3104A EAN: 4058352960370	LP number 59506_20
---	--	-------------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	64.9	0.4	0.4
5°	64.7	3.1	3.5
10°	63.9	6.1	9.6
15°	63.0	8.9	18.5
20°	64.1	12.0	30.5
25°	66.2	15.3	45.8
30°	69.8	19.1	65.0
35°	74.0	23.3	88.2
40°	76.3	26.9	115.1
45°	80.1	31.1	146.2
50°	82.4	34.6	180.7
55°	84.8	38.1	218.8
60°	86.9	41.2	260.1
65°	89.0	44.2	304.3
70°	90.2	46.5	350.7
75°	91.9	48.7	399.4
80°	93.0	50.2	449.6
85°	91.1	49.8	499.4
90°	3.7	2.0	501.4
95°	91.1	49.7	551.1
100°	92.9	50.2	601.3
105°	92.8	49.1	650.4
110°	89.5	46.1	696.5
115°	88.6	44.0	740.5
120°	86.8	41.2	781.7
125°	84.9	38.1	819.8
130°	81.3	34.2	854.0
135°	80.4	31.1	885.1
140°	76.2	26.8	912.0
145°	73.3	23.1	935.0
150°	69.8	19.1	954.2
155°	66.1	15.3	969.5
160°	64.1	12.0	981.5
165°	62.9	8.9	990.4
170°	63.9	6.1	996.5
175°	64.7	3.1	999.6
180°	65.0	0.4	1000.0

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI3D3104A EAN: 4058352960370	LP number 59506_20
----------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	26.1	27.3	27.0	28.2	29.3	26.1	27.3	27.0	28.2	29.3
	3H	28.8	29.9	29.7	30.8	31.9	28.8	29.9	29.7	30.8	31.9
	4H	30.3	31.3	31.2	32.2	33.4	30.3	31.3	31.2	32.2	33.4
	6H	31.7	32.6	32.6	33.6	34.7	31.7	32.6	32.6	33.6	34.7
	8H	32.4	33.2	33.3	34.2	35.4	32.4	33.2	33.3	34.2	35.4
	12H	33.1	33.9	34.0	34.9	36.1	33.1	33.9	34.0	34.9	36.1
4H	2H	27.0	28.0	27.9	28.9	30.1	27.0	28.0	27.9	28.9	30.1
	3H	29.9	30.8	30.8	31.7	32.9	29.9	30.8	30.8	31.7	32.9
	4H	31.5	32.2	32.4	33.2	34.4	31.5	32.2	32.4	33.2	34.4
	6H	33.0	33.7	34.0	34.7	36.0	33.0	33.7	34.0	34.7	36.0
	8H	33.8	34.5	34.8	35.4	36.7	33.8	34.5	34.8	35.4	36.7
	12H	34.6	35.2	35.6	36.2	37.5	34.6	35.2	35.6	36.2	37.5
8H	4H	32.0	32.6	33.0	33.6	34.9	32.0	32.6	33.0	33.6	34.9
	6H	33.8	34.3	34.8	35.3	36.7	33.8	34.3	34.8	35.3	36.7
	8H	34.8	35.3	35.8	36.3	37.6	34.8	35.3	35.8	36.3	37.6
	12H	35.8	36.2	36.8	37.2	38.6	35.8	36.2	36.8	37.2	38.6
12H	4H	32.1	32.6	33.1	33.6	35.0	32.1	32.6	33.1	33.6	35.0
	6H	34.0	34.5	35.0	35.5	36.8	34.0	34.5	35.0	35.5	36.8
	8H	35.1	35.5	36.1	36.5	37.9	35.1	35.5	36.1	36.5	37.9

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 65	H(C0) = 48 H(C90) = 48	H(C180) = 48 H(C270) = 48
------------------------	---	--------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	113162.0
50°	117077.1
55°	122345.8
60°	128076.5
65°	135228.8
70°	142639.6
75°	152650.1
80°	163852.5
85°	172445.8

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI3D3104A EAN: 4058352960370	LP number 59506_20
---	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

