

Photometric test report

Family
DL® 20 LED

Order number: 5XA512836A008P
EAN: 4058352042854

LP number
59487_31



Version	post-top mounting
Optic	asymmetric, wide distribution (ST1.2a)
Cover	toughened safety glass
Lamps	LED 2700 K CRI ≥ 70
Controlgear	ECG Plus
Rated values	Net luminous flux = 4200 lm Power consumption = 40.6 W Luminous efficacy = 103.4 lm/W

serial
documentation
07.12.2023

sitEco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 411 cd/klm

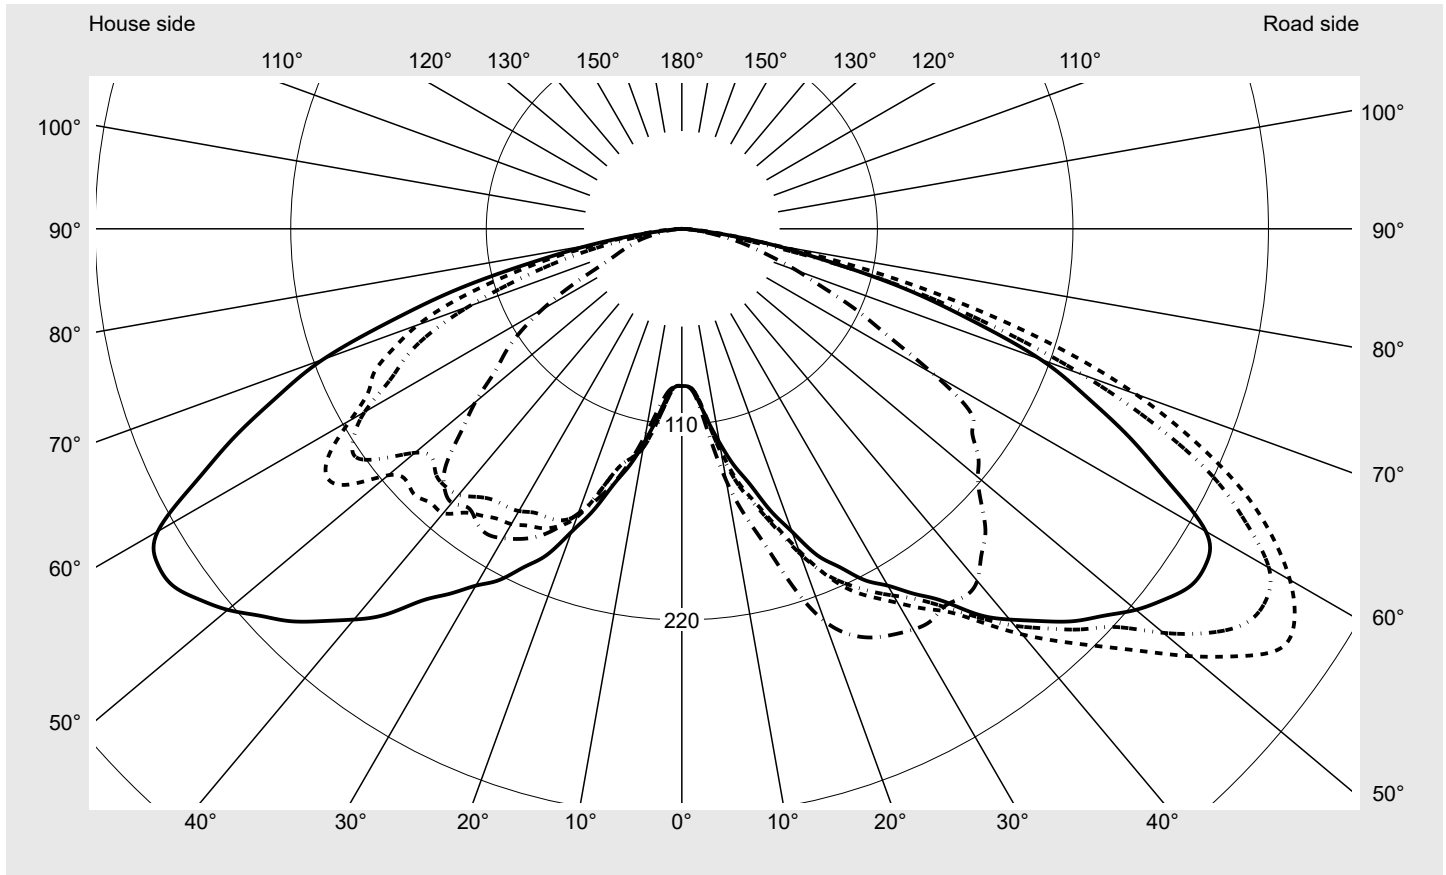

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	272.5
Imax 80°	53.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 20 LED	Order number: 5XA512836A008P EAN: 4058352042854	LP number 59487_31
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

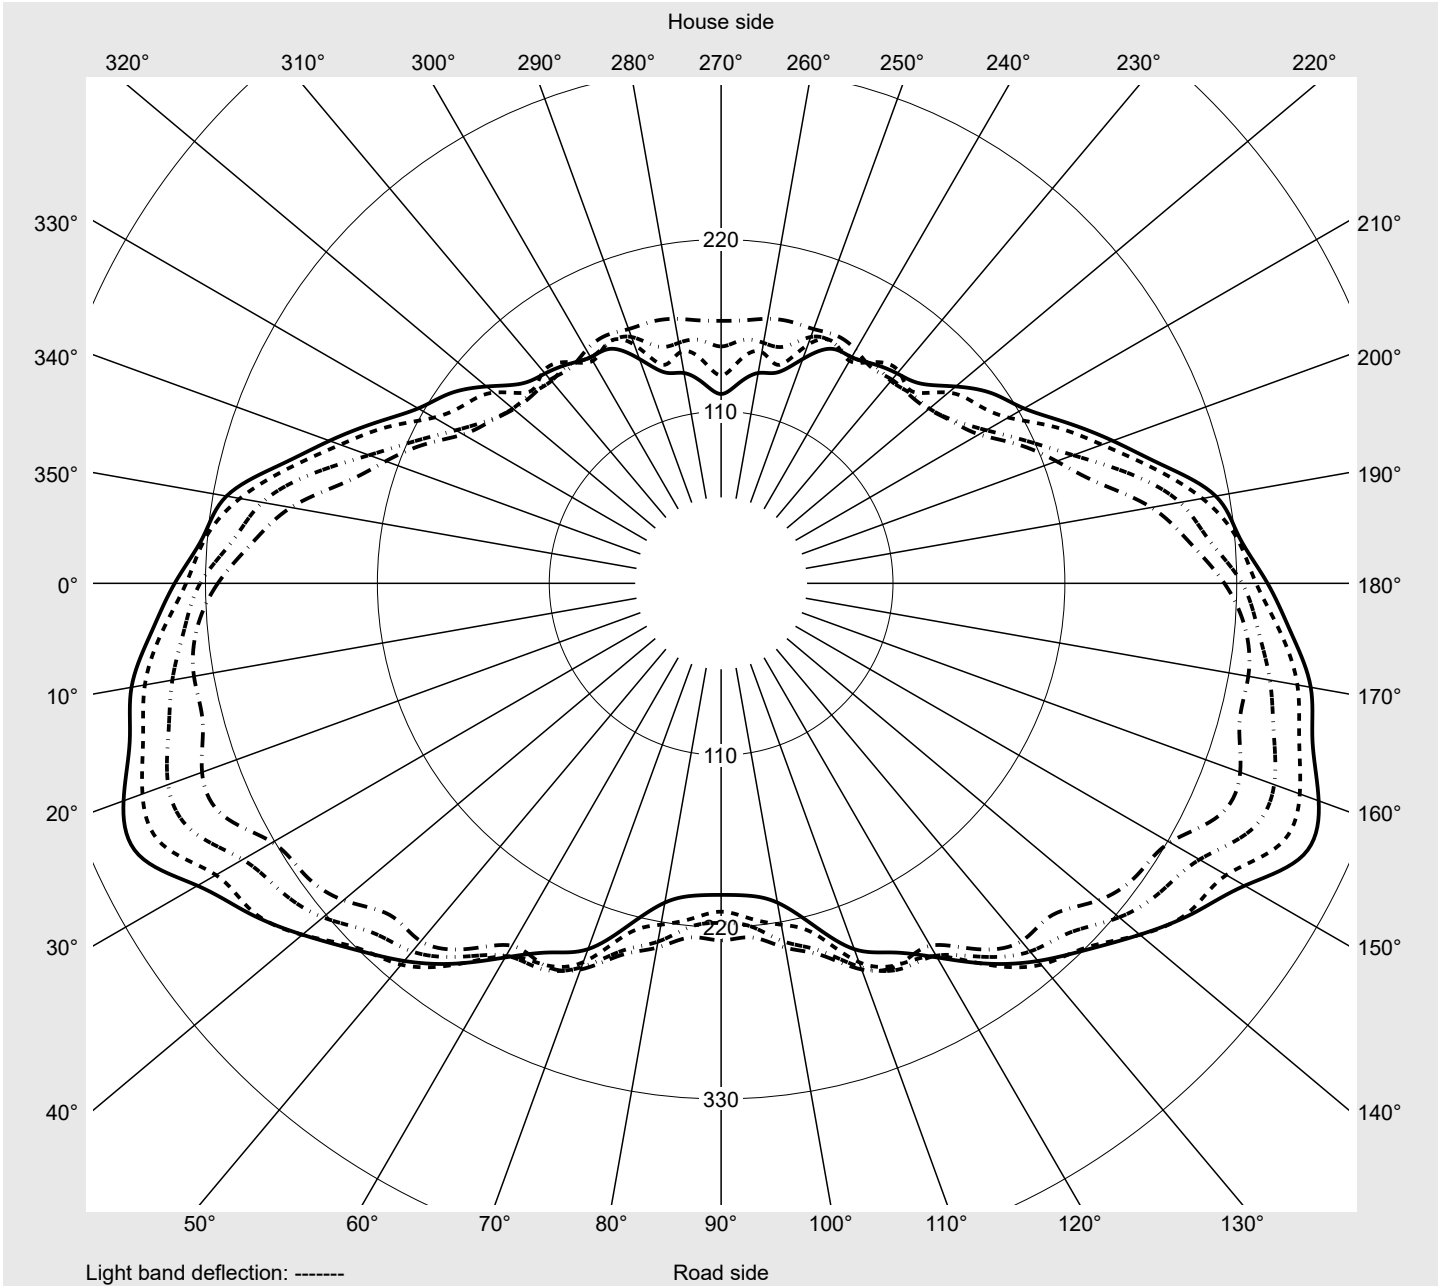

Photometric test report

Family DL® 20 LED	Order number: 5XA512836A008P EAN: 4058352042854	LP number 59487_31
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.1	88.8	88.7	88.8	88.8	88.8	89.0	89.0	88.9	89.0	89.1	89.2	89.2
5,0°	95.0	95.0	94.4	94.2	94.0	93.8	93.8	93.9	94.0	94.2	94.4	94.7	95.0
7,5°	107.9	107.4	106.9	107.2	107.3	107.3	108.0	108.7	109.4	110.4	111.2	112.2	113.4
10,0°	122.1	122.9	123.4	124.9	125.9	126.9	128.8	129.7	130.6	132.5	133.3	134.4	136.6
12,5°	136.6	137.9	140.2	142.4	143.9	145.6	147.8	148.0	148.8	150.6	150.3	151.3	153.8
15,0°	149.2	151.9	154.9	157.0	157.6	159.3	161.5	161.8	163.4	166.0	166.0	167.2	170.6
17,5°	166.4	168.4	171.4	172.3	172.7	174.8	177.1	179.2	183.1	187.2	189.2	191.7	195.8
20,0°	181.4	185.4	188.4	189.2	190.3	192.7	194.5	196.9	200.8	203.5	206.5	209.8	213.8
22,5°	198.6	202.0	205.4	206.2	208.6	210.1	209.8	210.1	211.3	211.7	215.4	219.4	223.3
25,0°	209.9	214.8	217.9	219.7	223.8	224.1	220.7	219.6	218.7	217.8	221.6	226.1	230.2
27,5°	222.8	227.4	229.3	230.9	235.0	233.7	229.8	228.3	225.1	225.2	228.7	232.4	236.4
30,0°	231.8	237.9	239.9	240.8	243.6	243.0	238.2	235.4	233.0	231.6	236.0	239.0	242.0
32,5°	243.5	250.4	252.6	251.0	253.2	253.3	247.2	244.2	243.2	239.9	241.4	243.5	247.4
35,0°	255.5	265.0	265.7	263.7	263.4	263.4	260.3	256.0	255.8	250.0	249.8	250.7	250.1
37,5°	273.4	285.9	282.5	279.6	280.8	279.7	275.9	272.9	267.3	263.8	261.5	258.5	255.2
40,0°	286.9	301.4	304.8	299.5	300.3	297.8	291.5	288.8	281.6	272.6	267.6	264.3	260.5
42,5°	299.3	315.0	322.9	317.0	321.4	314.8	305.0	301.1	293.2	283.4	277.4	272.3	261.8
45,0°	312.1	322.8	330.4	331.6	333.3	332.1	318.6	307.2	298.2	289.6	283.1	273.2	261.4
47,5°	322.1	336.9	342.6	343.5	353.5	351.7	331.6	325.2	315.5	300.1	299.0	285.8	267.8
50,0°	333.4	345.0	356.7	366.1	376.7	374.0	353.5	343.8	332.6	316.0	307.6	291.8	275.2
52,5°	342.4	359.3	374.5	383.0	394.1	394.9	373.3	366.1	349.9	329.8	318.6	298.0	275.5
55,0°	349.7	366.3	383.2	391.9	407.0	411.3	387.0	368.5	349.8	331.5	315.5	297.1	276.5
57,5°	349.9	363.2	378.2	392.7	410.1	408.7	389.4	364.3	344.6	322.1	301.2	279.9	269.2
60,0°	340.4	354.4	369.2	386.1	402.5	395.0	381.3	354.5	330.9	303.2	275.1	253.3	247.9
62,5°	308.5	331.8	352.4	366.5	381.2	374.3	357.7	326.0	303.9	273.2	249.2	235.2	226.2
65,0°	278.1	300.7	316.7	333.1	343.1	347.8	329.5	296.4	276.9	248.5	224.6	215.0	195.2
67,5°	245.9	260.8	278.7	298.7	308.0	312.3	288.5	263.1	247.3	212.8	192.2	177.8	155.7
70,0°	214.7	218.9	232.0	256.8	272.5	271.5	240.0	222.3	211.1	170.2	150.1	136.7	118.2
72,5°	170.3	180.3	189.5	209.5	223.5	221.7	186.3	173.9	161.8	132.2	115.0	99.9	87.6
75,0°	129.4	136.2	139.7	150.5	162.7	164.5	134.2	124.1	119.8	94.3	76.8	68.9	63.7
77,5°	84.1	91.7	89.7	93.7	104.1	107.1	80.8	75.0	77.3	55.3	46.0	41.3	40.1
80,0°	51.7	51.9	48.0	46.2	49.9	53.2	33.9	36.4	41.0	24.0	23.0	22.8	23.5
82,5°	23.2	23.6	22.2	20.6	22.4	25.5	13.7	16.2	19.6	10.1	10.0	10.6	11.6
85,0°	6.0	6.0	6.0	6.0	7.3	10.7	5.4	7.3	9.1	4.5	4.3	4.4	4.7
87,5°	2.0	2.0	2.0	1.9	1.9	2.4	1.8	1.7	1.7	1.6	1.6	1.5	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512836A008P EAN: 4058352042854	LP number 59487_31
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5
2,5°	89.3	89.3	89.4	89.4	89.3	89.2	88.9	88.9	89.1	89.0	89.1	89.2	89.1
5,0°	95.3	95.5	95.9	96.0	96.0	96.2	95.9	96.3	96.8	97.0	97.1	97.1	97.0
7,5°	114.1	114.8	115.9	116.2	116.5	116.9	108.5	109.1	109.9	110.3	110.7	111.0	111.0
10,0°	137.6	139.1	141.4	141.9	142.8	143.8	122.7	123.4	124.3	124.4	124.8	125.0	124.9
12,5°	154.6	156.8	160.6	161.9	163.9	165.6	135.1	134.1	134.2	133.1	132.3	132.2	132.0
15,0°	171.6	174.9	179.5	181.2	183.7	186.1	147.0	144.2	142.8	141.2	139.7	139.6	139.1
17,5°	197.6	201.3	206.8	208.7	210.9	213.3	163.3	160.1	158.5	157.4	156.2	155.7	154.2
20,0°	217.8	222.9	228.2	230.9	233.2	234.9	180.7	177.8	175.7	174.5	172.5	170.9	168.2
22,5°	229.6	235.6	240.4	244.8	246.9	247.0	195.8	192.5	188.2	185.5	181.1	177.5	174.5
25,0°	237.2	243.2	246.8	252.2	254.6	253.6	208.5	203.2	196.4	192.4	185.8	179.1	176.3
27,5°	243.6	249.3	251.5	257.0	259.0	257.3	219.9	212.2	204.1	197.0	188.2	180.0	177.5
30,0°	248.1	251.6	253.3	258.6	261.3	260.3	229.3	219.8	210.1	200.7	191.8	183.3	179.4
32,5°	250.8	253.5	256.5	260.6	261.5	261.3	238.2	230.6	217.0	205.1	193.4	184.8	178.6
35,0°	251.6	255.3	258.9	260.7	259.9	258.7	248.7	239.2	223.2	209.3	196.9	185.9	180.1
37,5°	255.6	257.3	260.4	261.7	259.4	260.9	260.3	247.0	231.5	217.8	201.3	190.0	182.0
40,0°	262.6	262.4	261.7	260.2	260.1	258.5	274.1	257.4	239.5	223.2	208.8	195.3	186.1
42,5°	267.2	267.0	258.6	253.4	249.5	249.3	283.3	267.7	246.0	225.6	209.2	196.7	189.5
45,0°	266.6	267.0	254.6	243.7	238.6	241.5	295.2	268.4	246.4	227.0	212.1	195.5	185.0
47,5°	269.3	263.0	246.2	236.8	227.5	228.5	301.0	279.6	249.3	228.5	210.0	190.6	180.6
50,0°	272.3	261.4	243.3	232.9	220.5	217.4	313.7	298.2	270.9	239.8	215.7	196.0	181.8
52,5°	269.2	258.0	232.4	221.8	215.4	210.1	331.4	312.8	285.8	259.4	236.4	212.2	199.8
55,0°	260.7	249.2	226.1	207.5	200.7	199.4	333.1	321.4	292.5	266.7	243.6	223.9	211.9
57,5°	248.6	231.5	221.9	193.0	182.3	192.8	324.6	302.6	280.6	258.2	234.8	218.9	207.6
60,0°	233.2	208.6	194.3	174.6	161.0	163.9	308.1	283.8	270.6	239.5	215.3	206.0	191.9
62,5°	211.0	184.4	158.7	148.5	139.5	131.3	289.1	265.4	245.6	221.5	198.8	185.6	171.6
65,0°	183.8	160.4	128.4	126.1	118.6	108.9	260.0	241.7	221.3	205.2	190.9	171.6	151.9
67,5°	150.3	133.3	100.8	100.3	97.5	85.7	232.2	215.5	203.1	187.5	175.4	153.0	133.3
70,0°	112.0	99.3	77.8	78.8	76.7	69.1	203.4	186.8	176.9	170.2	157.9	127.3	116.4
72,5°	80.4	69.5	60.4	59.6	56.6	54.0	160.4	150.2	142.9	139.9	133.0	99.2	93.1
75,0°	56.7	48.6	47.0	44.1	42.0	41.9	116.1	110.2	104.7	106.2	102.0	73.1	64.7
77,5°	37.8	33.1	32.6	33.3	31.8	31.4	79.5	74.8	68.9	74.3	72.9	48.1	41.4
80,0°	22.8	20.7	20.9	21.4	20.8	19.9	47.3	43.9	37.9	40.3	43.4	23.3	22.9
82,5°	12.2	11.3	11.8	11.7	11.3	11.1	22.0	20.4	17.3	18.6	23.9	10.2	11.2
85,0°	4.8	4.8	5.1	5.0	4.9	4.9	6.0	6.3	6.0	7.2	12.1	5.2	4.9
87,5°	1.5	1.5	1.6	1.4	1.4	1.4	2.0	2.0	2.0	1.9	2.7	1.8	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512836A008P EAN: 4058352042854	LP number 59487_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	88.5	0.1	0.1
2,5°	89.1	89.1	89.1	88.9	88.9	88.8	88.8	88.9	88.7	88.7	89.0	1.1	1.2
5,0°	96.7	96.5	95.9	95.4	94.8	94.1	93.6	93.2	92.5	92.2	92.5	2.3	3.5
7,5°	110.7	110.2	109.5	108.5	107.7	106.2	105.1	104.2	102.8	102.4	102.6	3.9	7.4
10,0°	124.4	124.2	123.3	122.5	122.0	120.4	119.3	119.1	117.7	117.2	117.7	6.1	13.4
12,5°	131.4	132.1	131.9	131.9	132.9	132.4	132.9	133.7	133.0	133.1	133.8	8.4	21.9
15,0°	138.2	139.3	140.1	140.5	142.3	143.0	144.5	146.4	146.4	147.1	148.1	11.0	32.8
17,5°	152.1	152.1	152.8	153.3	154.7	156.0	157.2	158.6	159.5	160.1	160.0	14.2	47.0
20,0°	165.1	163.1	163.5	164.0	164.6	167.1	169.2	170.3	172.0	171.6	170.5	17.7	64.7
22,5°	171.4	168.9	169.5	170.3	171.3	175.5	178.1	178.9	182.7	183.4	181.8	20.9	85.6
25,0°	173.5	170.8	172.7	173.5	174.3	180.2	184.0	185.0	189.9	192.6	190.8	24.0	109.6
27,5°	173.6	172.2	175.8	177.6	177.9	183.4	188.1	190.7	196.1	197.9	196.7	27.0	136.7
30,0°	174.9	173.5	178.6	182.9	182.9	186.9	190.4	194.2	199.7	201.4	201.0	30.0	166.6
32,5°	174.7	173.5	180.8	184.4	185.0	187.3	192.5	198.1	202.7	202.9	203.7	33.0	199.6
35,0°	173.3	174.4	181.5	185.6	186.5	188.3	194.2	199.5	201.8	202.1	201.4	36.0	235.6
37,5°	174.5	176.0	183.3	189.9	190.9	190.1	196.1	202.1	203.2	200.3	197.6	39.4	275.0
40,0°	179.5	179.6	185.1	190.4	191.5	192.3	198.9	202.1	203.8	202.5	201.2	42.9	317.9
42,5°	178.5	177.1	181.1	183.0	188.5	188.5	195.7	195.7	199.8	199.5	197.6	45.8	363.7
45,0°	175.1	173.4	176.1	178.1	178.3	181.1	188.7	188.0	187.8	189.1	187.5	48.1	411.8
47,5°	173.4	170.5	170.1	168.3	172.5	174.9	173.2	173.3	171.9	169.0	168.0	50.4	462.1
50,0°	174.0	171.7	169.1	170.4	167.0	169.8	167.8	156.9	156.3	156.3	151.6	53.4	515.6
52,5°	189.9	173.5	177.1	172.9	164.4	170.3	162.5	144.8	150.2	143.9	133.1	56.9	572.5
55,0°	196.0	180.8	175.3	171.1	167.1	165.6	152.8	139.8	136.7	128.5	121.2	58.9	631.4
57,5°	191.0	175.2	161.9	155.6	160.3	154.5	140.2	129.5	123.3	113.1	107.3	58.7	690.0
60,0°	175.3	161.7	143.8	142.2	148.1	140.1	125.6	115.5	107.1	96.7	90.5	56.5	746.5
62,5°	159.2	137.0	125.3	128.8	123.2	116.5	109.7	100.5	90.2	77.4	72.0	52.5	799.0
65,0°	141.4	119.2	106.0	111.5	96.4	90.6	93.7	78.0	66.1	58.5	53.7	47.7	846.7
67,5°	127.9	100.8	85.8	87.6	72.2	69.7	74.2	59.2	45.9	43.2	42.3	41.9	888.6
70,0°	110.1	75.8	59.5	66.7	46.1	47.3	55.7	42.1	35.2	35.4	35.7	35.2	923.8
72,5°	86.3	58.3	39.8	39.2	30.1	31.4	37.8	30.6	28.7	28.4	29.7	28.0	951.8
75,0°	65.3	44.3	27.1	24.2	23.7	23.4	26.2	25.4	23.9	23.5	24.8	20.7	972.5
77,5°	48.8	32.1	17.4	16.9	18.0	18.3	18.6	19.5	19.5	18.6	18.1	13.9	986.4
80,0°	31.4	16.4	10.7	11.3	12.5	13.5	13.2	13.7	13.9	13.2	12.3	7.8	994.2
82,5°	18.1	7.0	6.3	6.8	7.7	8.0	7.9	8.4	8.7	8.0	7.8	3.8	998.0
85,0°	9.0	3.6	3.4	3.4	3.8	3.8	3.7	3.8	3.9	3.7	3.5	1.5	999.5
87,5°	2.1	1.6	1.6	1.5	1.6	1.4	1.4	1.4	1.3	1.2	1.2	0.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 20 LED	Order number: 5XA512836A008P EAN: 4058352042854	LP number 59487_31
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4200	40.6	41.8	41.2
95	240	3985	38.4	39.4	38.9
90	227	3783	36.2	37.2	36.7
85	213	3564	34.0	34.9	34.4
80	200	3358	32.0	32.8	32.4
75	187	3152	29.9	30.7	30.3
70	174	2944	27.9	28.6	28.2
65	161	2733	25.8	26.5	26.2
60	148	2522	23.8	24.5	24.2
55	135	2308	21.8	22.4	22.1
50	122	2093	19.9	20.4	20.2
45	110	1893	18.1	18.6	18.4
40	97	1674	16.1	16.5	16.3
35	85	1471	14.4	14.8	14.6
30	73	1266	12.7	13.0	12.8
25	60	1043	10.9	11.1	11.0
20	48	835	9.2	9.4	9.3
15	36	626	7.5	7.6	7.6
12	29	502	6.5	6.6	6.6