


# Photometric test report

<b>Family</b> <b>Highbay 21</b>	<b>Order number: 51HK41DB4MCA</b> <b>EAN: 4058352883440</b>	<b>LP number</b> <b>59527_3</b>
	<b>Version</b> primary light control with lens, cover, polycarbonate, symmetric, narrow distribution, UGR≤22 <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 26200 lm Power consumption = 147.0 W Luminous efficacy = 178.2 lm/W	<b>serial documentation</b> <b>19.12.2023</b>
		

**Luminous intensity in cd/klm** C180-0 **Imax: 1597 cd/klm**

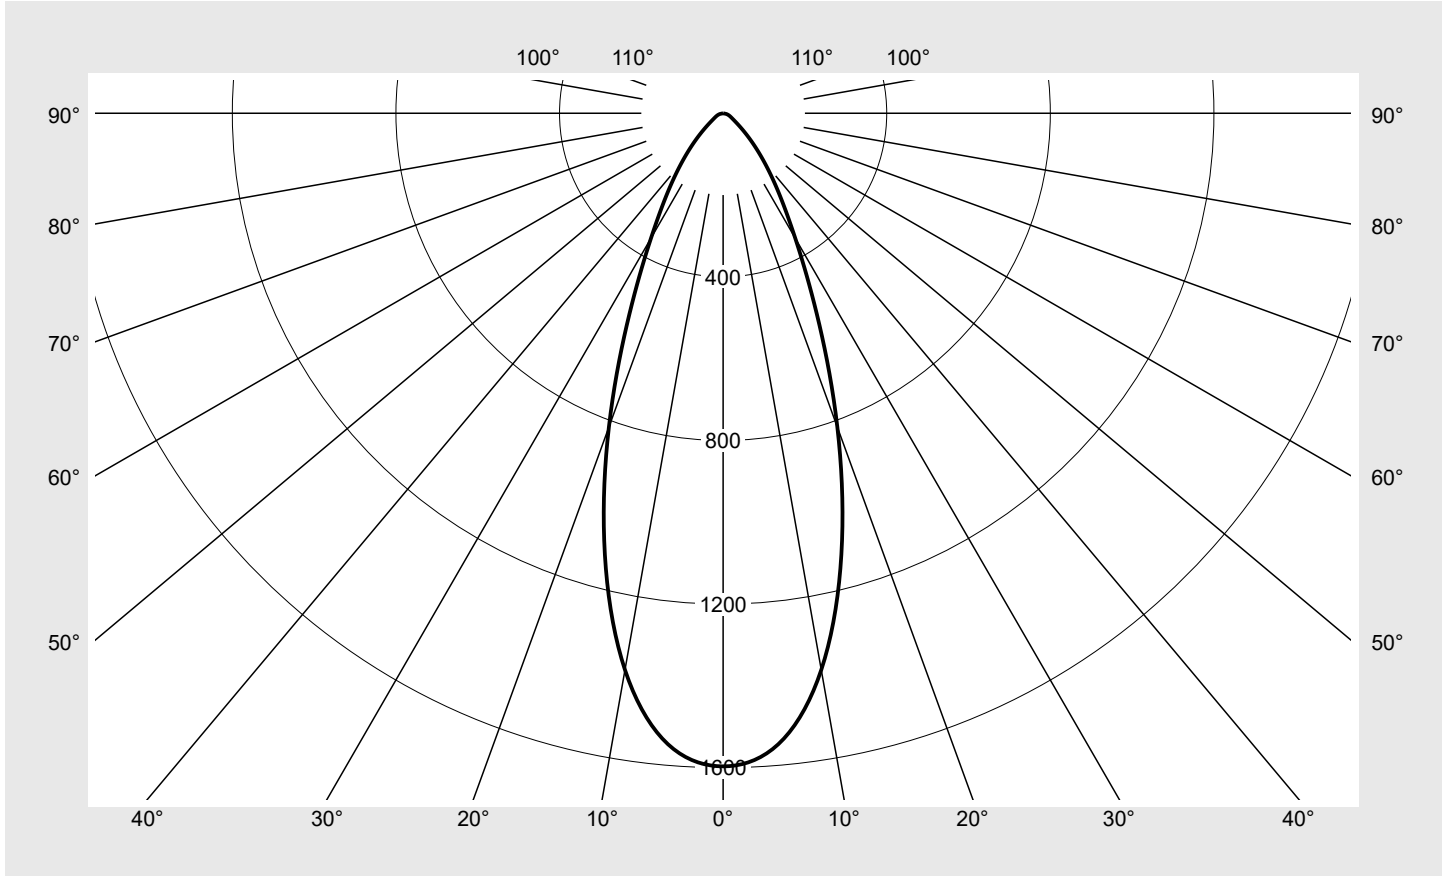

Classifications	
DIN 5040	A 7 0
CIE	N1=87 N2=97 N3=99 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 21	Order number: 51HK41DB4MCA EAN: 4058352883440	LP number 59527_3
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	<b>sITeco</b>
--	----------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	1596.8	9.5	9.5
5°	1548.5	74.0	83.5
10°	1381.9	131.5	215.1
15°	1117.1	158.5	373.5
20°	816.6	153.1	526.6
25°	542.6	125.7	652.3
30°	352.6	96.6	749.0
35°	236.6	74.4	823.4
40°	157.7	55.6	878.9
45°	100.4	38.9	917.8
50°	60.8	25.5	943.4
55°	37.9	17.0	960.4
60°	26.2	12.4	972.8
65°	19.8	9.8	982.6
70°	14.9	7.7	990.3
75°	10.3	5.4	995.8
80°	5.7	3.1	998.9
85°	2.1	1.1	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

## Photometric test report

Family Highbay 21	Order number: 51HK41DB4MCA EAN: 4058352883440	LP number 59527_3
----------------------	--	----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.3	19.5	18.7	19.8	20.1	18.3	19.5	18.7	19.8	20.1
	3H	18.7	19.7	19.1	20.1	20.4	18.7	19.7	19.1	20.1	20.4
	4H	18.9	19.8	19.3	20.2	20.6	18.9	19.8	19.3	20.2	20.6
	6H	19.0	19.9	19.4	20.2	20.6	19.0	19.9	19.4	20.2	20.6
	8H	19.1	19.9	19.6	20.2	20.7	19.1	19.9	19.6	20.2	20.7
	12H	19.1	19.8	19.6	20.2	20.6	19.1	19.8	19.6	20.2	20.6
4H	2H	18.4	19.3	18.8	19.7	20.1	18.4	19.3	18.8	19.7	20.1
	3H	18.9	19.7	19.3	20.1	20.5	18.9	19.7	19.3	20.1	20.5
	4H	19.2	19.9	19.6	20.3	20.7	19.2	19.9	19.6	20.3	20.7
	6H	19.4	20.0	19.8	20.4	20.9	19.4	20.0	19.8	20.4	20.9
	8H	19.4	20.0	19.9	20.4	20.9	19.4	20.0	19.9	20.4	20.9
	12H	19.5	19.9	20.0	20.4	20.9	19.5	19.9	20.0	20.4	20.9
8H	4H	19.2	19.8	19.7	20.2	20.7	19.2	19.8	19.7	20.2	20.7
	6H	19.5	19.9	20.0	20.4	20.9	19.5	19.9	20.0	20.4	20.9
	8H	19.6	20.0	20.1	20.5	21.0	19.6	20.0	20.1	20.5	21.0
	12H	19.7	20.0	20.2	20.5	21.0	19.7	20.0	20.2	20.5	21.0
12H	4H	19.3	19.7	19.8	20.2	20.7	19.3	19.7	19.8	20.2	20.7
	6H	19.5	19.9	20.0	20.4	20.9	19.5	19.9	20.0	20.4	20.9
	8H	19.6	19.9	20.2	20.4	21.0	19.6	19.9	20.2	20.4	21.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 450 B = 386
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	21406.3
50°	14276.8
55°	9965.6
60°	7908.3
65°	7063.5
70°	6587.8
75°	5975.3
80°	4987.6
85°	3575.5

**Photometric test report**

<b>Family</b> Highbay 21	<b>Order number: 51HK41DB4MCA</b> <b>EAN: 4058352883440</b>	<b>LP number</b> 59527_3
-----------------------------	--	-----------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

**siteco**

