
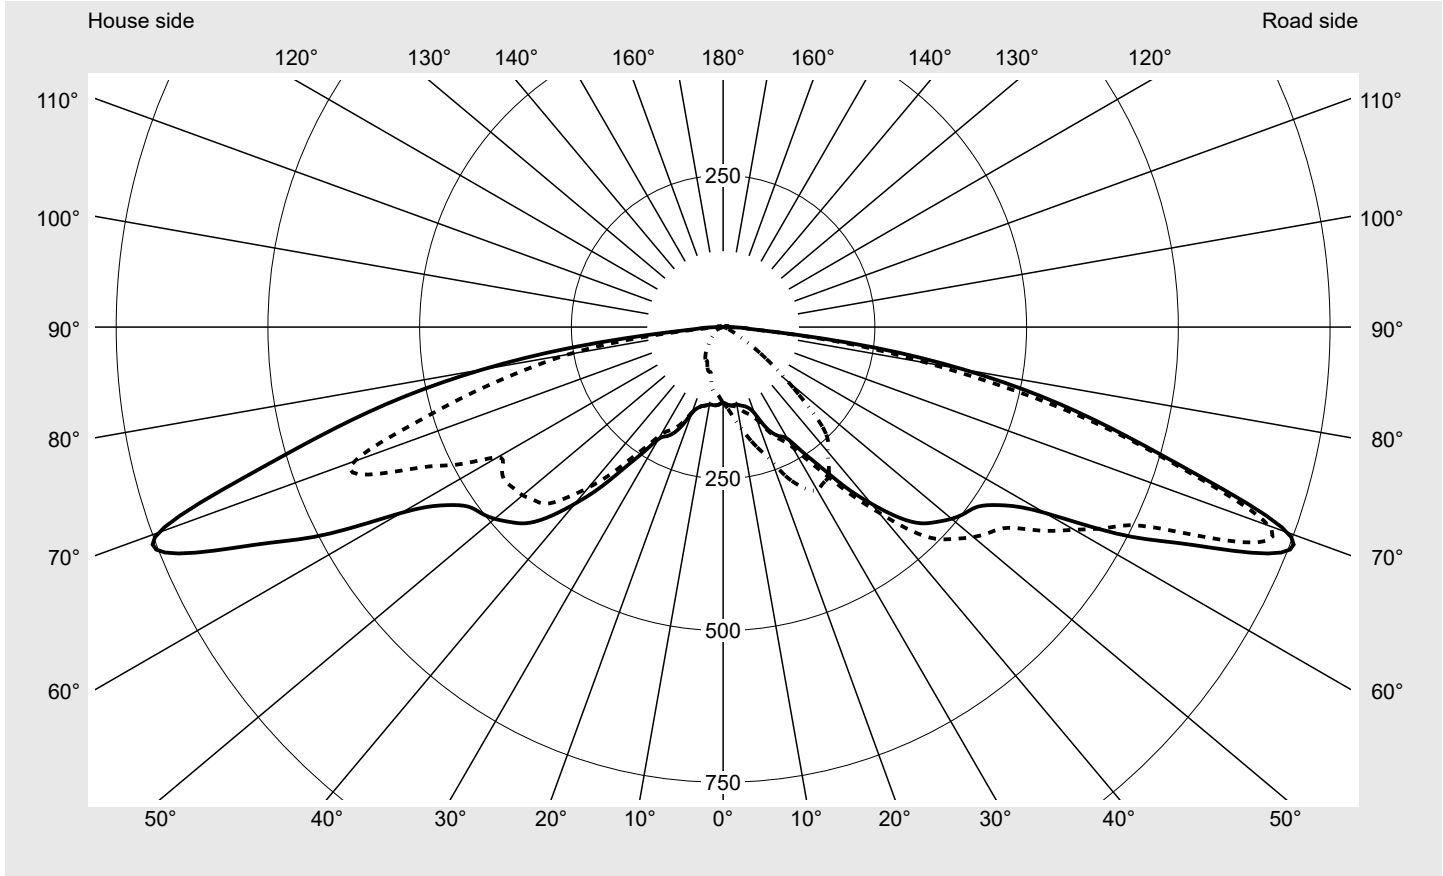


Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Setting individual position Rated values Net luminous flux = 2620 lm Power consumption = 24.2 W Luminous efficacy = 108.3 lm/W	serial documentation 06.06.2024



Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 989 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	989.5
Imax 80°	402.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
---	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

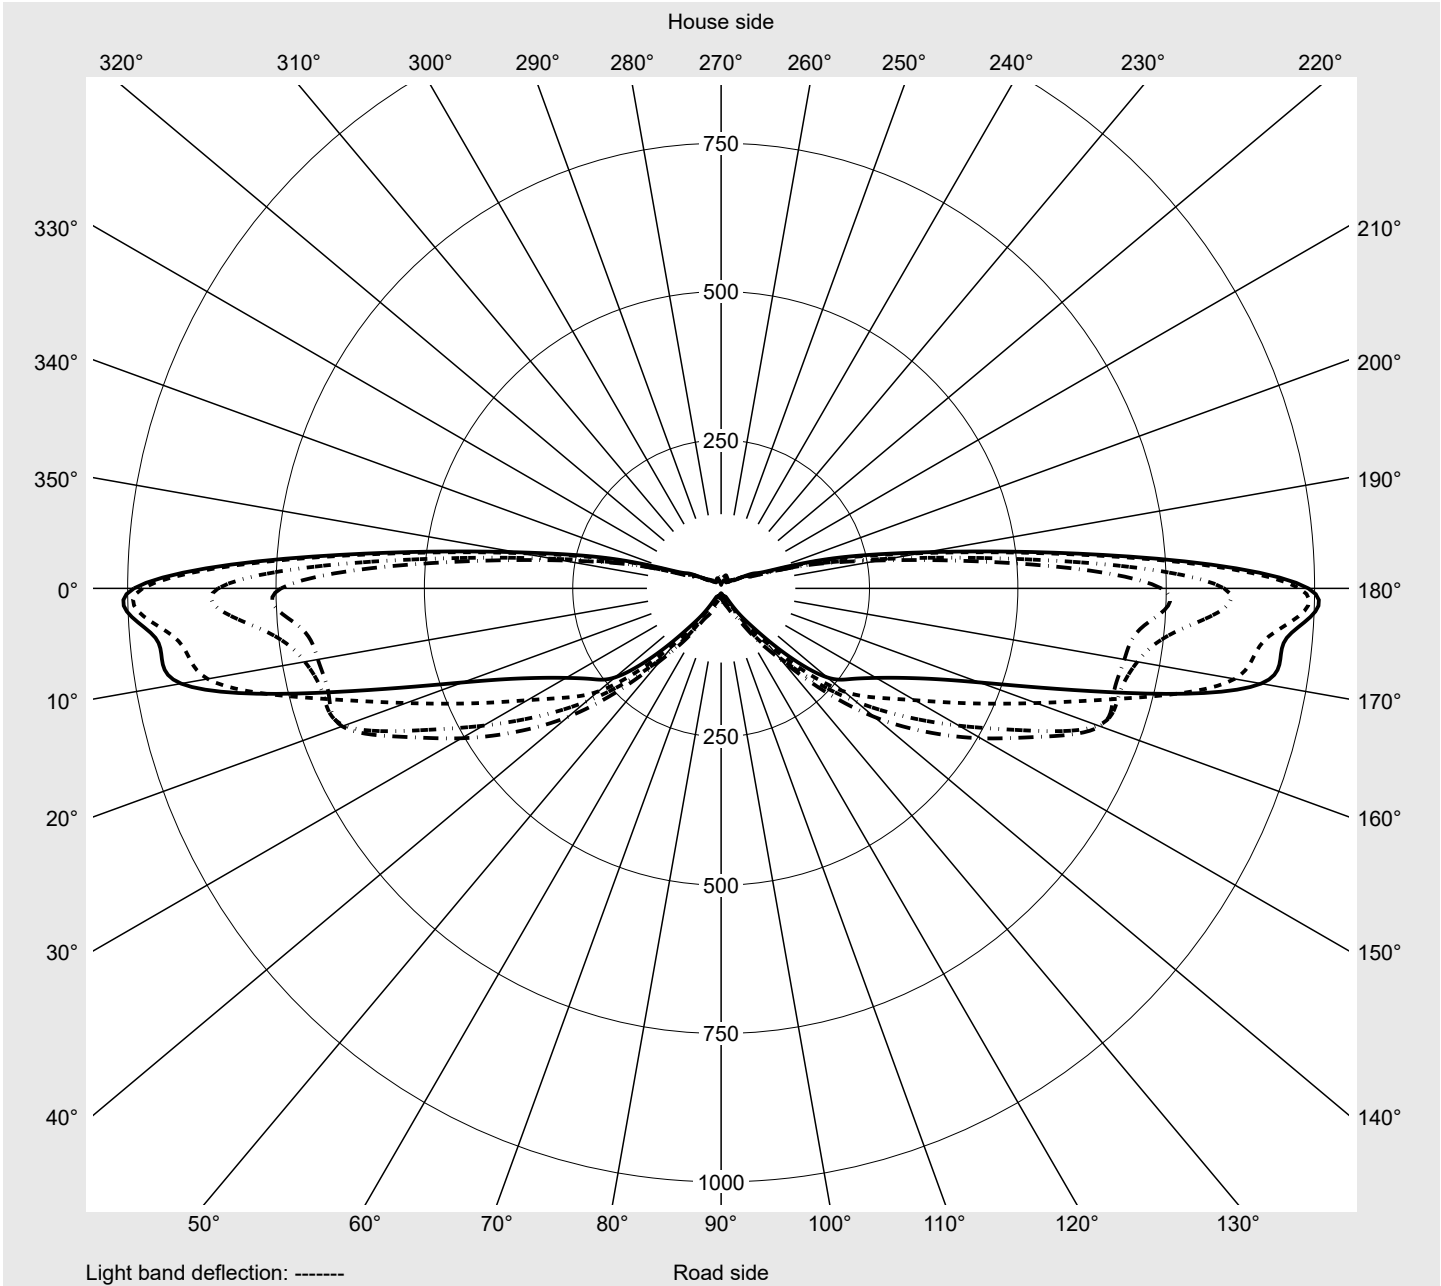

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	127.0	126.9	126.7	127.1	127.5	127.3	127.1	128.3	129.5	129.7	130.1	130.6	131.2
5,0°	129.4	129.7	129.9	131.6	133.3	133.8	134.2	136.5	138.5	139.4	140.0	140.9	141.8
7,5°	129.5	131.2	133.6	138.7	143.9	146.8	149.1	151.9	154.4	155.9	156.8	157.5	158.1
10,0°	129.7	134.2	139.4	146.6	153.6	158.3	162.1	165.8	169.0	171.3	173.3	173.9	174.6
12,5°	132.2	140.4	148.4	155.8	162.3	167.0	171.3	176.3	181.1	185.3	189.4	189.9	190.5
15,0°	134.8	146.4	156.9	164.5	170.7	176.6	182.2	188.1	194.0	199.8	205.5	206.6	207.7
17,5°	139.8	152.1	163.1	170.1	176.2	184.1	192.2	199.8	207.4	215.7	222.8	226.3	228.6
20,0°	151.0	162.2	172.4	179.8	187.1	197.9	208.5	215.8	222.4	230.5	237.9	242.4	245.9
22,5°	174.4	179.0	184.6	194.4	206.6	220.1	234.5	236.8	239.6	243.7	248.6	253.7	259.0
25,0°	192.5	197.2	200.3	212.0	224.9	242.0	260.4	258.9	257.4	259.0	261.2	265.2	269.7
27,5°	202.8	210.3	217.6	227.2	238.5	251.8	265.9	270.3	274.3	276.8	278.7	280.3	281.7
30,0°	213.1	228.0	242.7	251.7	258.7	264.6	271.4	282.3	294.5	293.7	292.8	288.0	283.7
32,5°	244.6	260.4	276.7	281.4	286.1	286.2	286.4	306.4	326.3	316.5	305.5	289.8	274.8
35,0°	282.9	300.1	316.1	317.6	319.2	314.0	308.8	326.9	345.1	329.2	310.9	285.5	257.6
37,5°	333.9	349.8	361.3	359.3	357.4	348.9	340.5	341.1	341.8	326.7	305.4	265.9	220.2
40,0°	379.9	398.5	411.0	406.7	402.4	389.4	375.8	360.7	343.6	326.1	299.9	252.8	198.4
42,5°	423.6	452.2	475.0	468.4	461.7	442.8	420.4	388.6	352.5	315.2	277.3	240.7	204.4
45,0°	456.8	492.9	524.2	518.3	512.3	487.3	457.2	413.0	362.6	308.3	258.7	224.8	201.4
47,5°	475.5	516.4	551.6	551.7	551.9	521.1	484.9	433.5	374.3	306.8	245.7	210.0	186.6
50,0°	491.4	538.2	578.7	582.9	587.1	549.7	507.2	451.2	386.1	306.4	233.6	193.5	167.9
52,5°	503.2	555.2	600.4	609.4	618.4	574.3	526.5	470.9	404.4	312.6	225.5	175.0	141.6
55,0°	514.9	576.5	631.8	638.3	644.8	591.1	535.5	478.3	409.9	308.7	211.5	155.7	119.1
57,5°	546.5	624.5	690.5	680.1	669.8	598.7	528.8	467.0	396.4	287.5	185.0	133.5	103.0
60,0°	612.4	667.9	723.5	703.4	683.3	601.3	522.1	456.0	382.9	270.8	166.0	114.7	85.6
62,5°	741.6	715.8	690.0	684.7	679.5	591.9	505.0	421.3	336.9	242.9	158.3	106.2	64.7
65,0°	847.5	779.9	712.2	694.0	675.7	566.2	462.6	375.5	296.7	219.8	150.6	96.0	46.7
67,5°	974.7	926.6	878.5	713.8	564.9	457.9	376.9	321.0	270.1	194.9	121.9	73.7	32.8
70,0°	989.5	956.7	924.0	674.9	463.3	357.9	301.7	266.3	233.4	162.9	91.8	51.1	19.0
72,5°	831.9	816.0	800.1	583.1	366.1	295.6	234.6	206.1	179.1	118.9	59.9	32.6	14.6
75,0°	681.5	667.1	652.6	470.2	287.8	232.2	183.0	156.1	129.7	81.8	27.9	19.4	11.0
77,5°	548.6	506.8	451.2	346.8	243.9	193.2	158.6	118.0	80.3	48.7	19.3	14.0	8.7
80,0°	402.4	343.4	286.5	233.7	187.8	156.1	126.6	84.0	44.9	25.8	12.7	9.5	6.7
82,5°	236.3	206.9	176.9	143.8	113.5	94.6	77.5	52.1	28.7	17.2	9.4	7.2	5.2
85,0°	70.2	68.8	67.3	53.3	39.3	39.7	40.0	27.0	15.8	10.1	6.1	4.8	3.6
87,5°	35.1	34.4	33.7	26.6	19.6	17.6	15.0	10.4	5.9	3.8	2.3	1.8	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	131.1	130.9	130.9	130.9	131.4	131.9	126.9	126.8	126.1	125.5	125.9	126.3	126.8
5,0°	141.5	141.3	141.2	141.1	141.4	141.8	129.1	128.6	127.9	127.1	127.7	128.4	128.2
7,5°	157.8	157.4	157.6	157.8	156.3	154.8	129.6	129.6	129.5	129.3	130.9	132.4	129.8
10,0°	174.4	174.2	173.9	173.5	171.2	169.0	130.3	130.9	131.7	132.5	132.9	133.3	129.2
12,5°	191.4	192.5	190.0	187.6	185.8	184.3	132.5	132.7	134.6	136.6	133.1	128.7	122.0
15,0°	208.6	209.6	205.9	202.3	201.4	200.5	134.6	134.4	137.9	141.3	133.2	126.0	121.3
17,5°	227.3	225.9	221.2	216.4	216.5	216.6	139.7	139.6	143.5	147.3	135.2	123.1	136.0
20,0°	243.2	240.3	236.8	233.2	234.6	236.0	149.3	147.6	150.0	152.3	139.2	126.0	144.7
22,5°	255.9	252.7	253.2	253.7	258.5	263.4	167.4	159.8	158.4	156.9	150.7	144.4	150.0
25,0°	266.4	263.2	268.7	274.2	279.5	284.8	182.5	171.8	164.9	159.3	153.9	149.1	145.3
27,5°	279.5	277.3	278.7	280.0	290.8	301.5	192.1	180.4	169.0	157.3	144.5	132.5	124.7
30,0°	280.8	278.3	282.1	285.9	297.9	309.9	204.4	194.7	177.5	157.5	136.4	117.1	105.2
32,5°	265.9	258.9	270.2	281.7	293.6	305.8	231.5	215.7	189.9	160.5	129.5	102.7	89.7
35,0°	249.1	240.7	259.9	277.5	290.3	301.7	264.1	240.1	204.4	164.7	127.2	89.9	79.7
37,5°	221.8	223.5	244.4	263.2	275.5	285.6	306.6	270.5	223.9	172.9	123.8	74.6	67.8
40,0°	203.1	207.9	226.8	244.2	257.0	268.4	345.3	299.3	239.5	176.3	121.8	69.1	61.7
42,5°	201.2	197.9	209.1	221.7	238.2	256.0	381.0	325.6	248.6	172.7	120.2	83.0	62.5
45,0°	189.2	181.7	186.8	191.9	211.1	230.3	411.6	352.0	259.0	169.0	119.6	88.2	65.7
47,5°	170.0	157.1	152.5	147.9	164.8	181.6	422.2	353.0	248.0	149.8	105.3	81.5	60.8
50,0°	146.6	130.9	119.6	110.2	124.7	139.2	431.1	353.9	248.2	131.8	100.7	72.8	54.5
52,5°	116.3	98.9	87.1	77.9	90.5	103.0	435.6	350.8	238.4	115.6	86.2	60.3	45.3
55,0°	92.1	74.1	62.4	53.8	63.4	73.0	439.5	347.7	228.5	99.2	72.5	49.5	37.7
57,5°	77.0	58.9	48.1	40.5	44.9	49.2	431.5	306.1	191.4	78.2	58.5	38.8	32.3
60,0°	61.9	46.2	36.8	30.3	30.9	31.5	429.1	264.5	155.8	65.7	49.2	32.6	28.1
62,5°	49.8	36.7	29.4	24.0	22.9	21.8	489.6	270.9	151.9	66.0	48.8	34.0	26.1
65,0°	37.0	28.3	22.5	18.6	16.3	14.7	546.3	287.4	155.7	66.3	49.2	34.1	25.5
67,5°	26.6	20.9	16.7	13.7	12.1	11.0	635.2	341.7	186.3	76.8	54.4	32.0	24.6
70,0°	17.0	14.9	12.3	9.9	8.9	8.2	646.5	350.5	195.4	87.3	59.0	30.7	23.7
72,5°	12.4	10.4	8.9	7.6	7.1	6.6	541.4	290.6	159.2	67.5	48.8	32.7	24.1
75,0°	8.9	7.1	6.2	5.6	5.4	5.2	439.7	231.4	123.8	49.7	39.9	30.9	23.8
77,5°	7.0	5.5	4.7	4.2	3.9	3.7	344.9	171.2	87.0	32.7	27.6	22.8	18.7
80,0°	5.1	4.1	3.4	3.0	2.8	2.6	258.9	115.4	67.6	19.9	17.9	16.0	14.2
82,5°	4.0	3.2	2.6	2.2	2.0	1.9	151.3	66.3	39.6	12.8	11.7	10.8	10.3
85,0°	2.8	2.2	1.7	1.5	1.3	1.2	43.7	17.3	12.2	7.2	6.8	6.4	6.5
87,5°	1.0	0.8	0.7	0.6	0.5	0.5	21.9	8.7	5.7	2.7	2.5	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	0.2	0.2
2,5°	127.2	125.8	124.4	123.3	122.1	120.5	119.0	118.1	117.5	117.1	116.9	1.5	1.7
5,0°	128.1	126.3	124.3	121.4	118.6	116.5	114.7	113.2	111.9	111.2	110.6	3.1	4.8
7,5°	127.0	123.7	120.0	116.4	112.7	112.6	112.4	110.5	108.6	108.6	108.5	4.9	9.7
10,0°	124.9	120.3	115.8	112.0	108.5	109.2	110.0	107.5	105.2	103.7	102.4	6.7	16.4
12,5°	114.6	116.9	119.2	112.6	106.6	102.8	99.8	96.1	92.9	91.4	90.3	8.6	25.0
15,0°	117.6	120.0	122.5	113.4	104.8	97.8	91.6	86.0	80.6	79.4	78.2	10.7	35.8
17,5°	148.9	131.4	115.8	105.4	97.9	92.3	87.9	83.2	78.7	77.8	77.0	13.1	48.9
20,0°	163.4	134.0	109.1	96.8	90.1	85.0	81.7	78.8	76.7	75.2	73.9	15.6	64.5
22,5°	155.6	128.1	104.0	90.2	79.8	75.5	71.8	69.9	68.6	68.3	68.1	18.4	82.9
25,0°	141.8	117.6	96.2	81.8	72.0	66.1	62.0	61.3	60.5	61.4	62.2	21.2	104.0
27,5°	116.0	99.6	83.3	74.1	68.0	63.2	59.2	59.4	59.6	60.5	61.3	23.6	127.6
30,0°	95.5	83.3	72.6	67.1	63.5	60.0	56.8	57.8	58.8	58.8	58.8	26.0	153.7
32,5°	81.8	72.5	65.0	60.7	58.2	56.4	55.0	55.0	55.0	54.5	54.0	28.7	182.4
35,0°	70.4	63.1	57.7	55.0	53.4	53.3	53.2	51.9	50.8	49.8	48.8	31.6	214.0
37,5°	61.4	55.7	50.2	49.8	49.4	48.1	47.1	46.5	46.2	44.4	42.5	34.2	248.2
40,0°	54.7	49.2	44.3	44.7	45.2	43.5	41.9	41.5	41.1	39.1	37.2	37.2	285.4
42,5°	51.9	45.1	40.7	40.4	39.9	39.1	37.9	36.1	34.1	33.6	33.2	40.8	326.2
45,0°	48.4	42.9	37.4	36.5	35.7	35.1	34.6	31.8	29.0	29.2	29.4	43.8	370.0
47,5°	43.9	39.3	34.7	33.6	32.5	32.3	32.1	29.2	26.3	25.9	25.6	45.2	415.2
50,0°	39.3	35.4	31.5	30.7	29.8	29.9	30.0	27.1	24.2	23.3	22.5	46.6	461.8
52,5°	34.0	30.7	27.5	27.5	27.4	28.0	28.6	25.5	22.9	21.4	20.3	47.5	509.2
55,0°	29.6	26.8	24.0	24.7	25.5	26.4	27.4	24.5	21.8	19.9	18.2	48.2	557.5
57,5°	26.7	23.4	20.9	22.8	24.4	25.6	26.7	23.9	21.2	18.7	16.2	48.7	606.2
60,0°	24.0	21.0	18.4	20.7	22.9	24.5	25.9	23.3	20.5	17.4	14.3	49.2	655.4
62,5°	21.5	18.4	16.3	18.5	20.6	22.1	23.4	20.9	18.5	16.0	13.6	50.0	705.4
65,0°	19.0	16.9	14.7	16.6	18.4	19.6	20.7	18.3	16.0	14.4	13.0	51.1	756.5
67,5°	18.4	15.5	13.7	15.1	16.3	17.3	18.2	15.5	13.0	11.1	9.3	52.9	809.3
70,0°	17.7	14.9	13.2	13.5	13.8	14.3	14.9	12.2	9.7	7.8	6.1	50.7	860.0
72,5°	18.0	15.7	13.6	12.0	10.8	10.2	9.8	7.8	6.1	4.6	3.2	42.6	902.6
75,0°	18.4	15.3	13.2	10.3	7.8	6.7	5.8	4.1	2.4	1.3	0.4	34.3	936.9
77,5°	15.5	13.5	11.9	9.5	7.1	5.3	3.8	2.5	1.5	0.8	0.2	26.3	963.2
80,0°	12.5	11.3	9.9	8.1	6.1	3.9	1.7	1.2	0.6	0.3	0.0	18.8	982.0
82,5°	9.6	8.2	6.6	5.4	4.3	2.9	1.3	0.8	0.4	0.2	0.1	11.5	993.5
85,0°	6.6	5.1	3.8	3.2	2.7	1.8	0.9	0.5	0.3	0.2	0.2	4.4	997.9
87,5°	2.5	1.9	1.4	1.2	1.0	0.7	0.3	0.2	0.1	0.1	0.1	2.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1CC1F08DE EAN: 4069025076397	LP number 58063_266
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	2620	24.2	24.7	24.4
95	241	252	2486	22.8	23.3	23.0
90	229	250	2362	21.5	21.9	21.7
85	216	248	2228	20.1	20.5	20.3
80	203	246	2094	18.8	19.1	19.0
75	190	243	1960	17.5	17.9	17.7
70	178	241	1836	16.4	16.7	16.5
65	165	238	1702	15.1	15.4	15.2
60	152	235	1568	13.9	14.1	14.0
55	140	232	1444	12.8	13.0	12.9
50	127	229	1310	11.7	11.8	11.8
45	114	225	1176	10.5	10.7	10.6
40	102	221	1052	9.5	9.7	9.6
35	89	216	918	8.5	8.6	8.6
30	76	210	784	7.4	7.5	7.4
25	63	203	650	6.4	6.4	6.4
20	51	195	526	5.5	5.5	5.5
15	39	185	402	4.5	4.6	4.6