


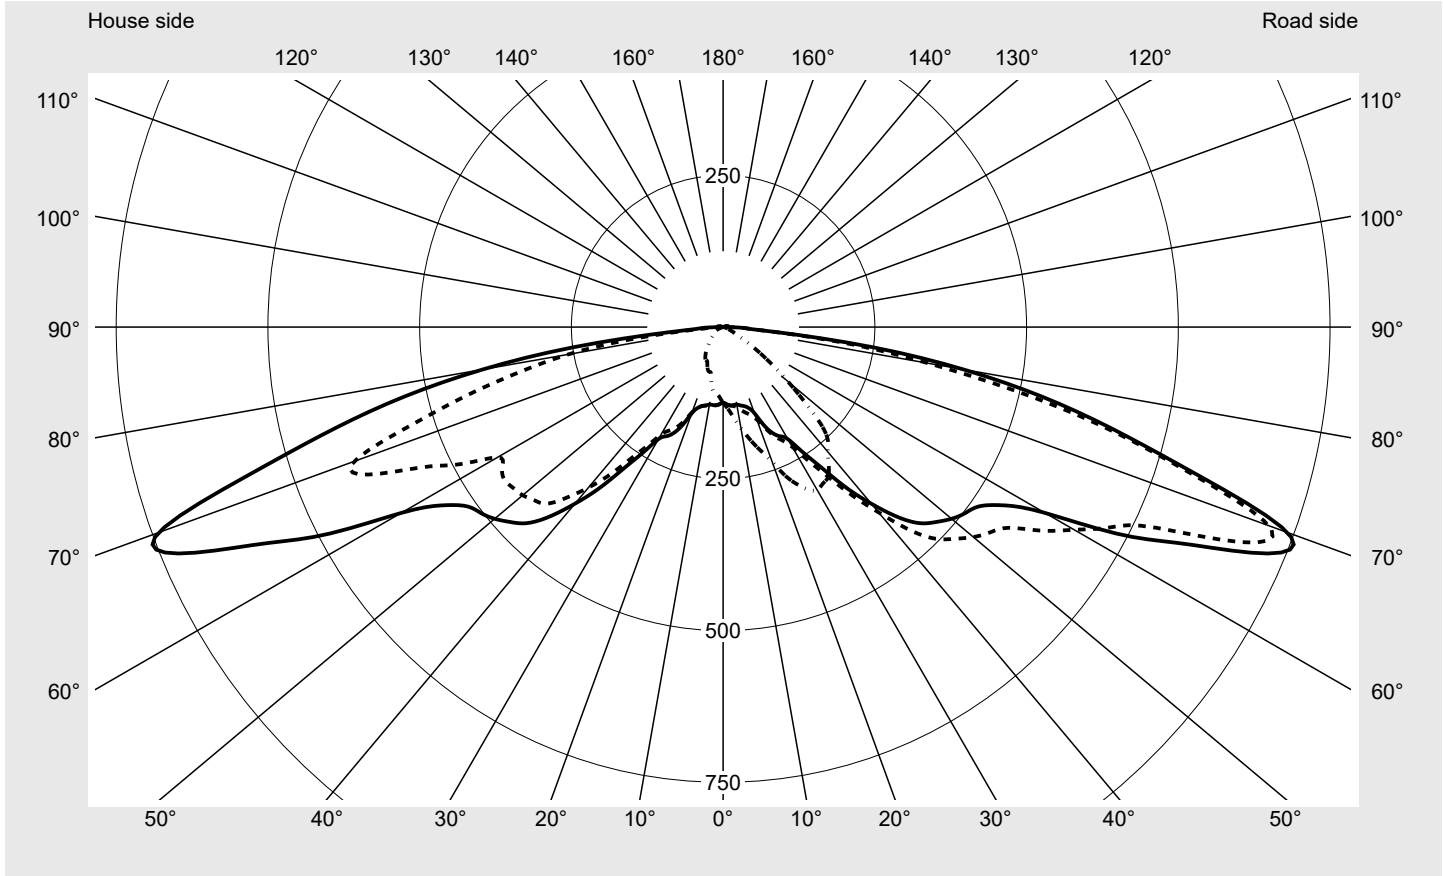
Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1600 lm Power consumption = 10.8 W Luminous efficacy = 148.1 lm/W	serial documentation 14.06.2024





Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 989 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	---
Imax 70°	989.5
Imax 80°	402.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
--	--	--------------------------------------

Envelope curve in cd/klm	KMK 70° KMK 67.5° KMK 65° KMK 62.5°	
---------------------------------	---	---

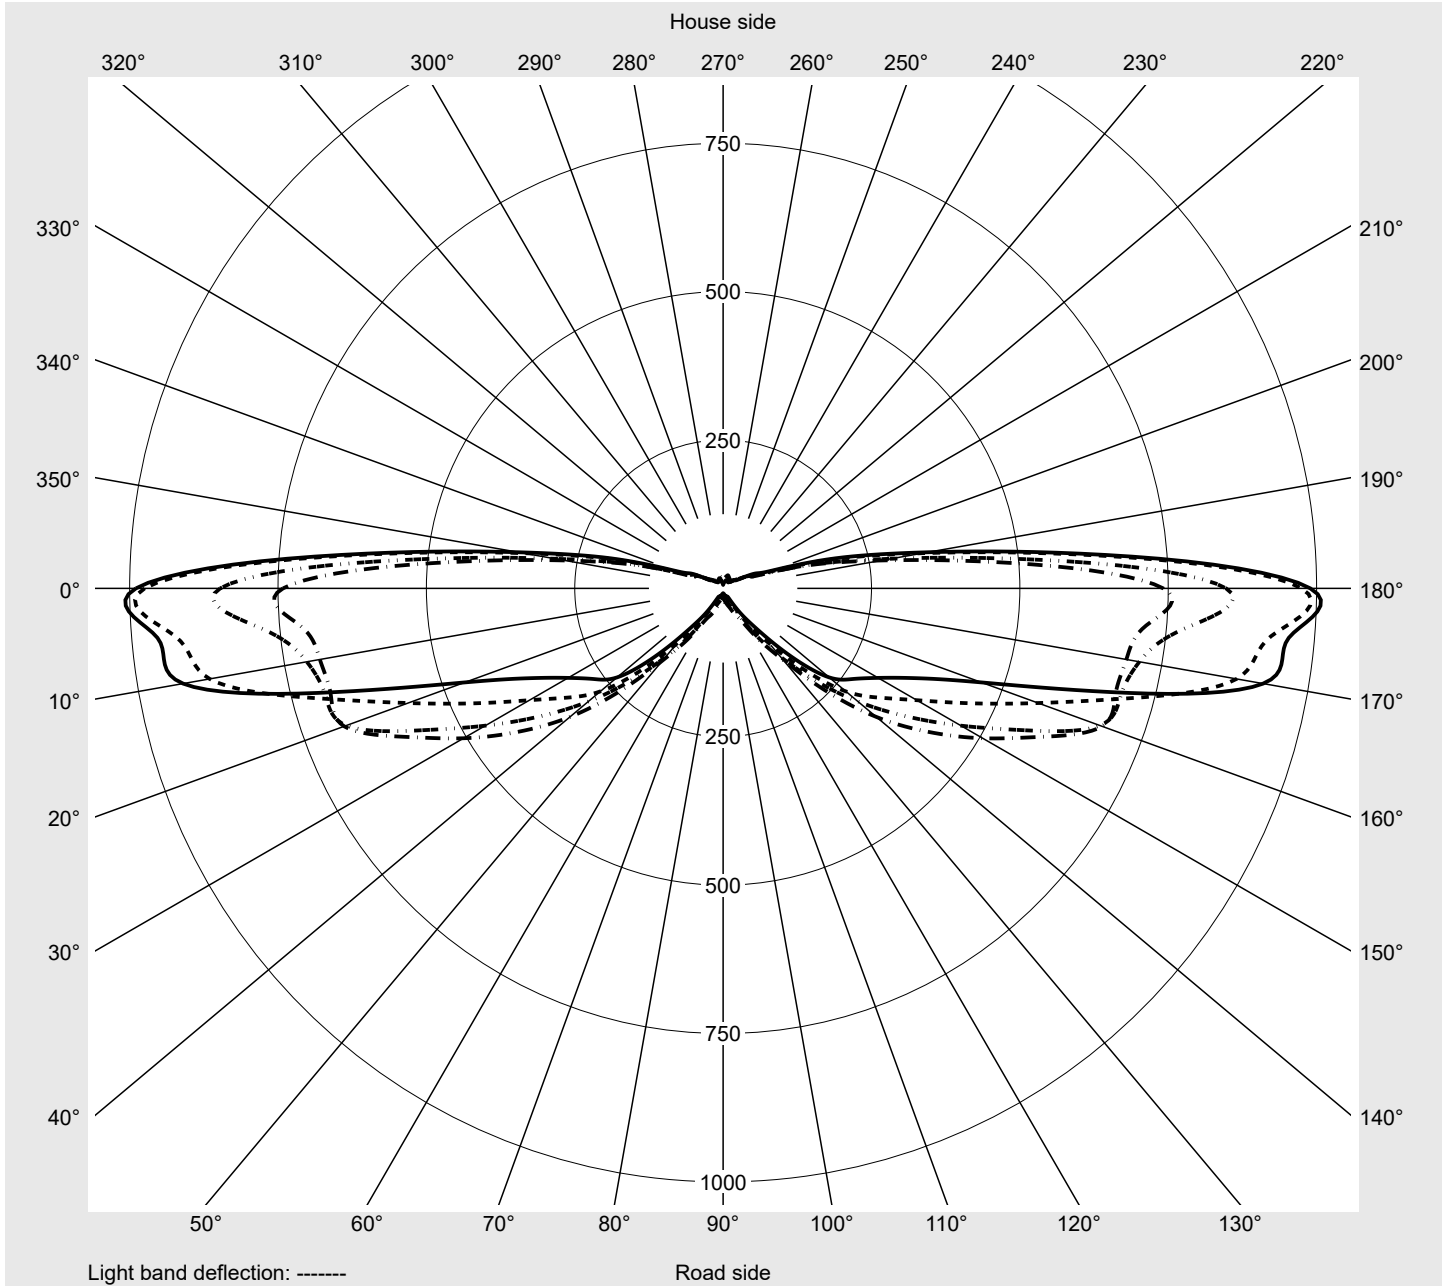

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	127.0	126.9	126.7	127.1	127.5	127.3	127.1	128.3	129.5	129.7	130.1	130.6	131.2
5,0°	129.4	129.7	129.9	131.6	133.3	133.8	134.2	136.5	138.5	139.4	140.0	140.9	141.8
7,5°	129.5	131.2	133.6	138.7	143.9	146.8	149.1	151.9	154.4	155.9	156.8	157.5	158.1
10,0°	129.7	134.2	139.4	146.6	153.6	158.3	162.1	165.8	169.0	171.3	173.3	173.9	174.6
12,5°	132.2	140.4	148.4	155.8	162.3	167.0	171.3	176.3	181.1	185.3	189.4	189.9	190.5
15,0°	134.8	146.4	156.9	164.5	170.7	176.6	182.2	188.1	194.0	199.8	205.5	206.6	207.7
17,5°	139.8	152.1	163.1	170.1	176.2	184.1	192.2	199.8	207.4	215.7	222.8	226.3	228.6
20,0°	151.0	162.2	172.4	179.8	187.1	197.9	208.5	215.8	222.4	230.5	237.9	242.4	245.9
22,5°	174.4	179.0	184.6	194.4	206.6	220.1	234.5	236.8	239.6	243.7	248.6	253.7	259.0
25,0°	192.5	197.2	200.3	212.0	224.9	242.0	260.4	258.9	257.4	259.0	261.2	265.2	269.7
27,5°	202.8	210.3	217.6	227.2	238.5	251.8	265.9	270.3	274.3	276.8	278.7	280.3	281.7
30,0°	213.1	228.0	242.7	251.7	258.7	264.6	271.4	282.3	294.5	293.7	292.8	288.0	283.7
32,5°	244.6	260.4	276.7	281.4	286.1	286.2	286.4	306.4	326.3	316.5	305.5	289.8	274.8
35,0°	282.9	300.1	316.1	317.6	319.2	314.0	308.8	326.9	345.1	329.2	310.9	285.5	257.6
37,5°	333.9	349.8	361.3	359.3	357.4	348.9	340.5	341.1	341.8	326.7	305.4	265.9	220.2
40,0°	379.9	398.5	411.0	406.7	402.4	389.4	375.8	360.7	343.6	326.1	299.9	252.8	198.4
42,5°	423.6	452.2	475.0	468.4	461.7	442.8	420.4	388.6	352.5	315.2	277.3	240.7	204.4
45,0°	456.8	492.9	524.2	518.3	512.3	487.3	457.2	413.0	362.6	308.3	258.7	224.8	201.4
47,5°	475.5	516.4	551.6	551.7	551.9	521.1	484.9	433.5	374.3	306.8	245.7	210.0	186.6
50,0°	491.4	538.2	578.7	582.9	587.1	549.7	507.2	451.2	386.1	306.4	233.6	193.5	167.9
52,5°	503.2	555.2	600.4	609.4	618.4	574.3	526.5	470.9	404.4	312.6	225.5	175.0	141.6
55,0°	514.9	576.5	631.8	638.3	644.8	591.1	535.5	478.3	409.9	308.7	211.5	155.7	119.1
57,5°	546.5	624.5	690.5	680.1	669.8	598.7	528.8	467.0	396.4	287.5	185.0	133.5	103.0
60,0°	612.4	667.9	723.5	703.4	683.3	601.3	522.1	456.0	382.9	270.8	166.0	114.7	85.6
62,5°	741.6	715.8	690.0	684.7	679.5	591.9	505.0	421.3	336.9	242.9	158.3	106.2	64.7
65,0°	847.5	779.9	712.2	694.0	675.7	566.2	462.6	375.5	296.7	219.8	150.6	96.0	46.7
67,5°	974.7	926.6	878.5	713.8	564.9	457.9	376.9	321.0	270.1	194.9	121.9	73.7	32.8
70,0°	989.5	956.7	924.0	674.9	463.3	357.9	301.7	266.3	233.4	162.9	91.8	51.1	19.0
72,5°	831.9	816.0	800.1	583.1	366.1	295.6	234.6	206.1	179.1	118.9	59.9	32.6	14.6
75,0°	681.5	667.1	652.6	470.2	287.8	232.2	183.0	156.1	129.7	81.8	27.9	19.4	11.0
77,5°	548.6	506.8	451.2	346.8	243.9	193.2	158.6	118.0	80.3	48.7	19.3	14.0	8.7
80,0°	402.4	343.4	286.5	233.7	187.8	156.1	126.6	84.0	44.9	25.8	12.7	9.5	6.7
82,5°	236.3	206.9	176.9	143.8	113.5	94.6	77.5	52.1	28.7	17.2	9.4	7.2	5.2
85,0°	70.2	68.8	67.3	53.3	39.3	39.7	40.0	27.0	15.8	10.1	6.1	4.8	3.6
87,5°	35.1	34.4	33.7	26.6	19.6	17.6	15.0	10.4	5.9	3.8	2.3	1.8	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	131.1	130.9	130.9	130.9	131.4	131.9	126.9	126.8	126.1	125.5	125.9	126.3	126.8
5,0°	141.5	141.3	141.2	141.1	141.4	141.8	129.1	128.6	127.9	127.1	127.7	128.4	128.2
7,5°	157.8	157.4	157.6	157.8	156.3	154.8	129.6	129.6	129.5	129.3	130.9	132.4	129.8
10,0°	174.4	174.2	173.9	173.5	171.2	169.0	130.3	130.9	131.7	132.5	132.9	133.3	129.2
12,5°	191.4	192.5	190.0	187.6	185.8	184.3	132.5	132.7	134.6	136.6	133.1	128.7	122.0
15,0°	208.6	209.6	205.9	202.3	201.4	200.5	134.6	134.4	137.9	141.3	133.2	126.0	121.3
17,5°	227.3	225.9	221.2	216.4	216.5	216.6	139.7	139.6	143.5	147.3	135.2	123.1	136.0
20,0°	243.2	240.3	236.8	233.2	234.6	236.0	149.3	147.6	150.0	152.3	139.2	126.0	144.7
22,5°	255.9	252.7	253.2	253.7	258.5	263.4	167.4	159.8	158.4	156.9	150.7	144.4	150.0
25,0°	266.4	263.2	268.7	274.2	279.5	284.8	182.5	171.8	164.9	159.3	153.9	149.1	145.3
27,5°	279.5	277.3	278.7	280.0	290.8	301.5	192.1	180.4	169.0	157.3	144.5	132.5	124.7
30,0°	280.8	278.3	282.1	285.9	297.9	309.9	204.4	194.7	177.5	157.5	136.4	117.1	105.2
32,5°	265.9	258.9	270.2	281.7	293.6	305.8	231.5	215.7	189.9	160.5	129.5	102.7	89.7
35,0°	249.1	240.7	259.9	277.5	290.3	301.7	264.1	240.1	204.4	164.7	127.2	89.9	79.7
37,5°	221.8	223.5	244.4	263.2	275.5	285.6	306.6	270.5	223.9	172.9	123.8	74.6	67.8
40,0°	203.1	207.9	226.8	244.2	257.0	268.4	345.3	299.3	239.5	176.3	121.8	69.1	61.7
42,5°	201.2	197.9	209.1	221.7	238.2	256.0	381.0	325.6	248.6	172.7	120.2	83.0	62.5
45,0°	189.2	181.7	186.8	191.9	211.1	230.3	411.6	352.0	259.0	169.0	119.6	88.2	65.7
47,5°	170.0	157.1	152.5	147.9	164.8	181.6	422.2	353.0	248.0	149.8	105.3	81.5	60.8
50,0°	146.6	130.9	119.6	110.2	124.7	139.2	431.1	353.9	248.2	131.8	100.7	72.8	54.5
52,5°	116.3	98.9	87.1	77.9	90.5	103.0	435.6	350.8	238.4	115.6	86.2	60.3	45.3
55,0°	92.1	74.1	62.4	53.8	63.4	73.0	439.5	347.7	228.5	99.2	72.5	49.5	37.7
57,5°	77.0	58.9	48.1	40.5	44.9	49.2	431.5	306.1	191.4	78.2	58.5	38.8	32.3
60,0°	61.9	46.2	36.8	30.3	30.9	31.5	429.1	264.5	155.8	65.7	49.2	32.6	28.1
62,5°	49.8	36.7	29.4	24.0	22.9	21.8	489.6	270.9	151.9	66.0	48.8	34.0	26.1
65,0°	37.0	28.3	22.5	18.6	16.3	14.7	546.3	287.4	155.7	66.3	49.2	34.1	25.5
67,5°	26.6	20.9	16.7	13.7	12.1	11.0	635.2	341.7	186.3	76.8	54.4	32.0	24.6
70,0°	17.0	14.9	12.3	9.9	8.9	8.2	646.5	350.5	195.4	87.3	59.0	30.7	23.7
72,5°	12.4	10.4	8.9	7.6	7.1	6.6	541.4	290.6	159.2	67.5	48.8	32.7	24.1
75,0°	8.9	7.1	6.2	5.6	5.4	5.2	439.7	231.4	123.8	49.7	39.9	30.9	23.8
77,5°	7.0	5.5	4.7	4.2	3.9	3.7	344.9	171.2	87.0	32.7	27.6	22.8	18.7
80,0°	5.1	4.1	3.4	3.0	2.8	2.6	258.9	115.4	67.6	19.9	17.9	16.0	14.2
82,5°	4.0	3.2	2.6	2.2	2.0	1.9	151.3	66.3	39.6	12.8	11.7	10.8	10.3
85,0°	2.8	2.2	1.7	1.5	1.3	1.2	43.7	17.3	12.2	7.2	6.8	6.4	6.5
87,5°	1.0	0.8	0.7	0.6	0.5	0.5	21.9	8.7	5.7	2.7	2.5	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	0.2	0.2
2,5°	127.2	125.8	124.4	123.3	122.1	120.5	119.0	118.1	117.5	117.1	116.9	1.5	1.7
5,0°	128.1	126.3	124.3	121.4	118.6	116.5	114.7	113.2	111.9	111.2	110.6	3.1	4.8
7,5°	127.0	123.7	120.0	116.4	112.7	112.6	112.4	110.5	108.6	108.6	108.5	4.9	9.7
10,0°	124.9	120.3	115.8	112.0	108.5	109.2	110.0	107.5	105.2	103.7	102.4	6.7	16.4
12,5°	114.6	116.9	119.2	112.6	106.6	102.8	99.8	96.1	92.9	91.4	90.3	8.6	25.0
15,0°	117.6	120.0	122.5	113.4	104.8	97.8	91.6	86.0	80.6	79.4	78.2	10.7	35.8
17,5°	148.9	131.4	115.8	105.4	97.9	92.3	87.9	83.2	78.7	77.8	77.0	13.1	48.9
20,0°	163.4	134.0	109.1	96.8	90.1	85.0	81.7	78.8	76.7	75.2	73.9	15.6	64.5
22,5°	155.6	128.1	104.0	90.2	79.8	75.5	71.8	69.9	68.6	68.3	68.1	18.4	82.9
25,0°	141.8	117.6	96.2	81.8	72.0	66.1	62.0	61.3	60.5	61.4	62.2	21.2	104.0
27,5°	116.0	99.6	83.3	74.1	68.0	63.2	59.2	59.4	59.6	60.5	61.3	23.6	127.6
30,0°	95.5	83.3	72.6	67.1	63.5	60.0	56.8	57.8	58.8	58.8	58.8	26.0	153.7
32,5°	81.8	72.5	65.0	60.7	58.2	56.4	55.0	55.0	55.0	54.5	54.0	28.7	182.4
35,0°	70.4	63.1	57.7	55.0	53.4	53.3	53.2	51.9	50.8	49.8	48.8	31.6	214.0
37,5°	61.4	55.7	50.2	49.8	49.4	48.1	47.1	46.5	46.2	44.4	42.5	34.2	248.2
40,0°	54.7	49.2	44.3	44.7	45.2	43.5	41.9	41.5	41.1	39.1	37.2	37.2	285.4
42,5°	51.9	45.1	40.7	40.4	39.9	39.1	37.9	36.1	34.1	33.6	33.2	40.8	326.2
45,0°	48.4	42.9	37.4	36.5	35.7	35.1	34.6	31.8	29.0	29.2	29.4	43.8	370.0
47,5°	43.9	39.3	34.7	33.6	32.5	32.3	32.1	29.2	26.3	25.9	25.6	45.2	415.2
50,0°	39.3	35.4	31.5	30.7	29.8	29.9	30.0	27.1	24.2	23.3	22.5	46.6	461.8
52,5°	34.0	30.7	27.5	27.5	27.4	28.0	28.6	25.5	22.9	21.4	20.3	47.5	509.2
55,0°	29.6	26.8	24.0	24.7	25.5	26.4	27.4	24.5	21.8	19.9	18.2	48.2	557.5
57,5°	26.7	23.4	20.9	22.8	24.4	25.6	26.7	23.9	21.2	18.7	16.2	48.7	606.2
60,0°	24.0	21.0	18.4	20.7	22.9	24.5	25.9	23.3	20.5	17.4	14.3	49.2	655.4
62,5°	21.5	18.4	16.3	18.5	20.6	22.1	23.4	20.9	18.5	16.0	13.6	50.0	705.4
65,0°	19.0	16.9	14.7	16.6	18.4	19.6	20.7	18.3	16.0	14.4	13.0	51.1	756.5
67,5°	18.4	15.5	13.7	15.1	16.3	17.3	18.2	15.5	13.0	11.1	9.3	52.9	809.3
70,0°	17.7	14.9	13.2	13.5	13.8	14.3	14.9	12.2	9.7	7.8	6.1	50.7	860.0
72,5°	18.0	15.7	13.6	12.0	10.8	10.2	9.8	7.8	6.1	4.6	3.2	42.6	902.6
75,0°	18.4	15.3	13.2	10.3	7.8	6.7	5.8	4.1	2.4	1.3	0.4	34.3	936.9
77,5°	15.5	13.5	11.9	9.5	7.1	5.3	3.8	2.5	1.5	0.8	0.2	26.3	963.2
80,0°	12.5	11.3	9.9	8.1	6.1	3.9	1.7	1.2	0.6	0.3	0.0	18.8	982.0
82,5°	9.6	8.2	6.6	5.4	4.3	2.9	1.3	0.8	0.4	0.2	0.1	11.5	993.5
85,0°	6.6	5.1	3.8	3.2	2.7	1.8	0.9	0.5	0.3	0.2	0.2	4.4	997.9
87,5°	2.5	1.9	1.4	1.2	1.0	0.7	0.3	0.2	0.1	0.1	0.1	2.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51E08CE EAN: 4058352583456	LP number 58063_317
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1600	10.8	11.1	11.0
95	241	252	1518	10.3	10.6	10.4
90	229	250	1443	9.8	10.0	9.9
85	216	248	1361	9.3	9.5	9.4
80	203	246	1279	8.8	9.0	8.9
75	190	243	1197	8.3	8.5	8.4
70	178	241	1121	7.8	8.0	7.9
65	165	238	1039	7.4	7.5	7.4
60	152	235	957	6.9	7.0	7.0
55	140	232	882	6.4	6.6	6.5
50	127	229	800	6.0	6.1	6.0
45	114	225	718	5.5	5.6	5.6
40	102	221	643	5.0	5.1	5.0
35	89	216	561	4.6	4.7	4.6
30	76	210	479	4.1	4.2	4.2
25	63	203	397	3.5	3.6	3.6
20	51	195	321	2.9	3.0	3.0
19	47	192	296	2.7	2.8	2.8