
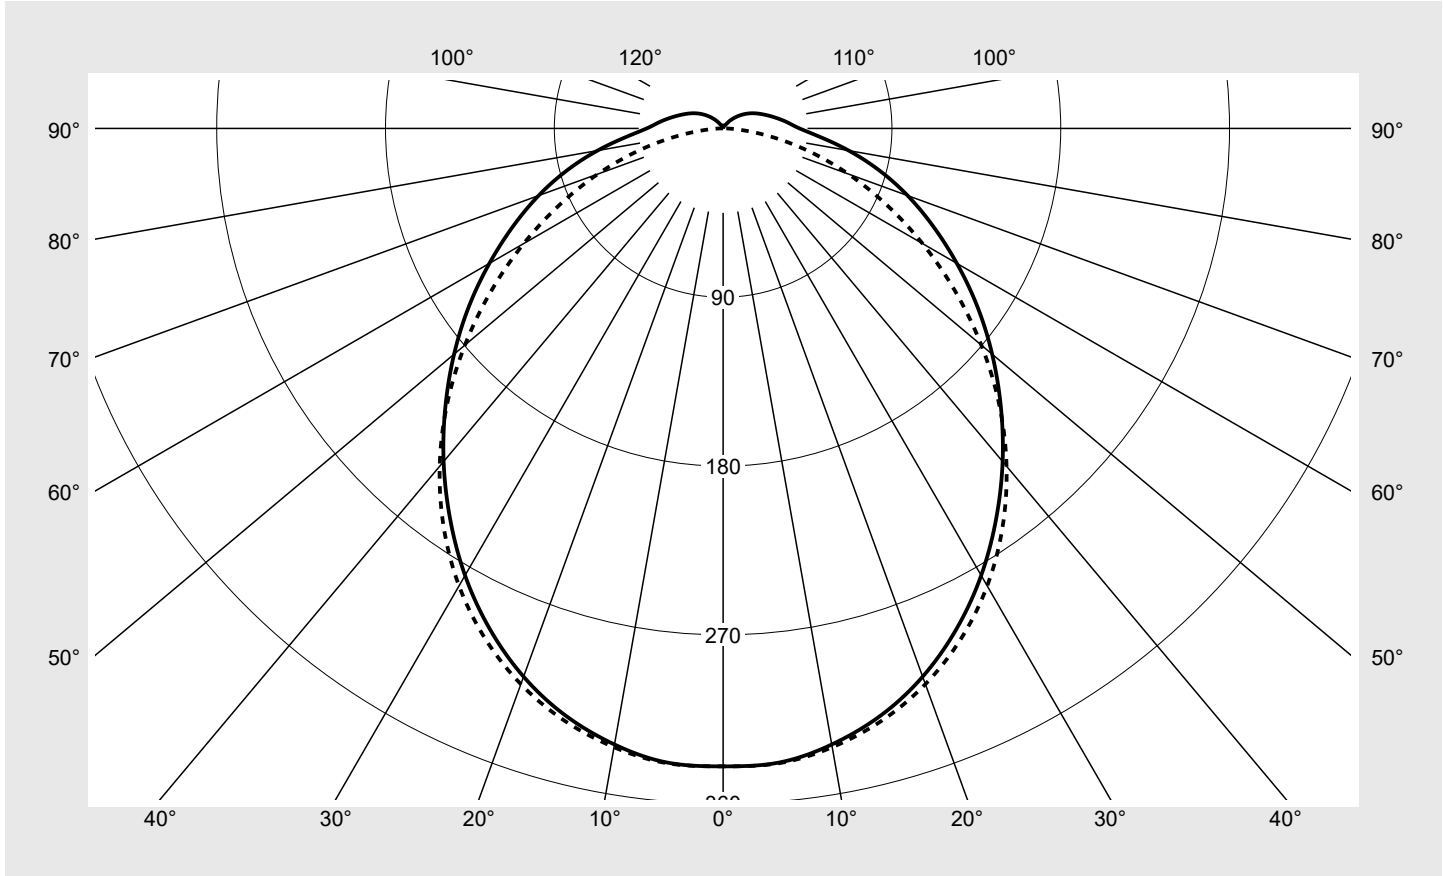


Photometric test report

Family Monsun® 21	Order number: 51FB10MP480B EAN: 4058352520079	LP number 58939_96
	Version prismatic diffuser, opal, PMMA, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 8190 lm Power consumption = 53.6 W Luminous efficacy = 152.8 lm/W	serial documentation 12.01.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 340 cd/klm**



Classifications	
DIN 5040	A 4 1
CIE	N1=47 N2=77 N3=93 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	94.2%
ϕ_o	5.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB10MP480B EAN: 4058352520079	LP number 58939_96
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB10MP480B EAN: 4058352520079	LP number 58939_96
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.1	22.8	21.5	23.1	23.5	21.1	22.8	21.5	23.1	23.4
	3H	22.9	24.4	23.2	24.7	25.1	22.5	24.0	22.9	24.4	24.7
	4H	23.7	25.1	24.1	25.5	25.9	23.0	24.5	23.4	24.8	25.2
	6H	24.4	25.8	24.8	26.1	26.5	23.4	24.7	23.8	25.1	25.5
	8H	24.8	26.1	25.2	26.4	26.8	23.5	24.8	23.9	25.2	25.6
	12H	25.1	26.3	25.5	26.7	27.1	23.6	24.8	24.0	25.2	25.6
4H	2H	21.8	23.3	22.2	23.6	24.0	21.8	23.3	22.2	23.6	24.0
	3H	23.8	25.0	24.2	25.4	25.8	23.4	24.6	23.8	25.0	25.4
	4H	24.7	25.9	25.2	26.3	26.7	24.0	25.2	24.5	25.6	26.0
	6H	25.6	26.6	26.1	27.1	27.5	24.5	25.5	25.0	25.9	26.4
	8H	26.1	27.0	26.5	27.4	27.9	24.7	25.6	25.1	26.0	26.5
	12H	26.5	27.3	27.0	27.7	28.2	24.8	25.6	25.2	26.0	26.5
8H	4H	25.0	26.0	25.5	26.4	26.9	24.4	25.3	24.9	25.8	26.3
	6H	26.1	26.9	26.6	27.4	27.9	25.1	25.8	25.5	26.3	26.8
	8H	26.7	27.4	27.2	27.8	28.3	25.3	26.0	25.8	26.4	27.0
	12H	27.2	27.8	27.7	28.3	28.8	25.4	26.0	25.9	26.5	27.0
12H	4H	25.1	25.9	25.6	26.4	26.9	24.5	25.3	25.0	25.8	26.3
	6H	26.2	26.9	26.7	27.4	27.9	25.2	25.9	25.7	26.4	26.9
	8H	26.8	27.4	27.3	27.9	28.4	25.5	26.1	26.0	26.6	27.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		14121.9	14209.5	14313.4	14612.7	15243.4	16087.6	17203.7	
50°		13393.7	13443.3	13543.8	13750.5	14270.5	15072.2	16295.1	
55°		12700.5	12715.3	12793.1	12893.9	13295.9	13996.5	15285.1	
60°		12015.3	12005.2	12026.1	12064.3	12329.2	12907.8	14207.6	
65°		11413.0	11385.5	11289.2	11217.6	11375.1	11810.5	13079.1	
70°		10895.8	10834.3	10553.1	10353.8	10372.2	10654.9	11866.8	
75°		10356.6	10258.8	9865.2	9465.1	9230.3	9325.5	10425.4	
80°		9785.1	9622.6	9228.3	8516.9	7923.7	7660.1	8525.6	
85°		9368.1	9169.7	8741.0	7849.0	6671.8	5716.8	5954.1	

Photometric test report

Family Monsun® 21	Order number: 51FB10MP480B EAN: 4058352520079	LP number 58939_96
------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

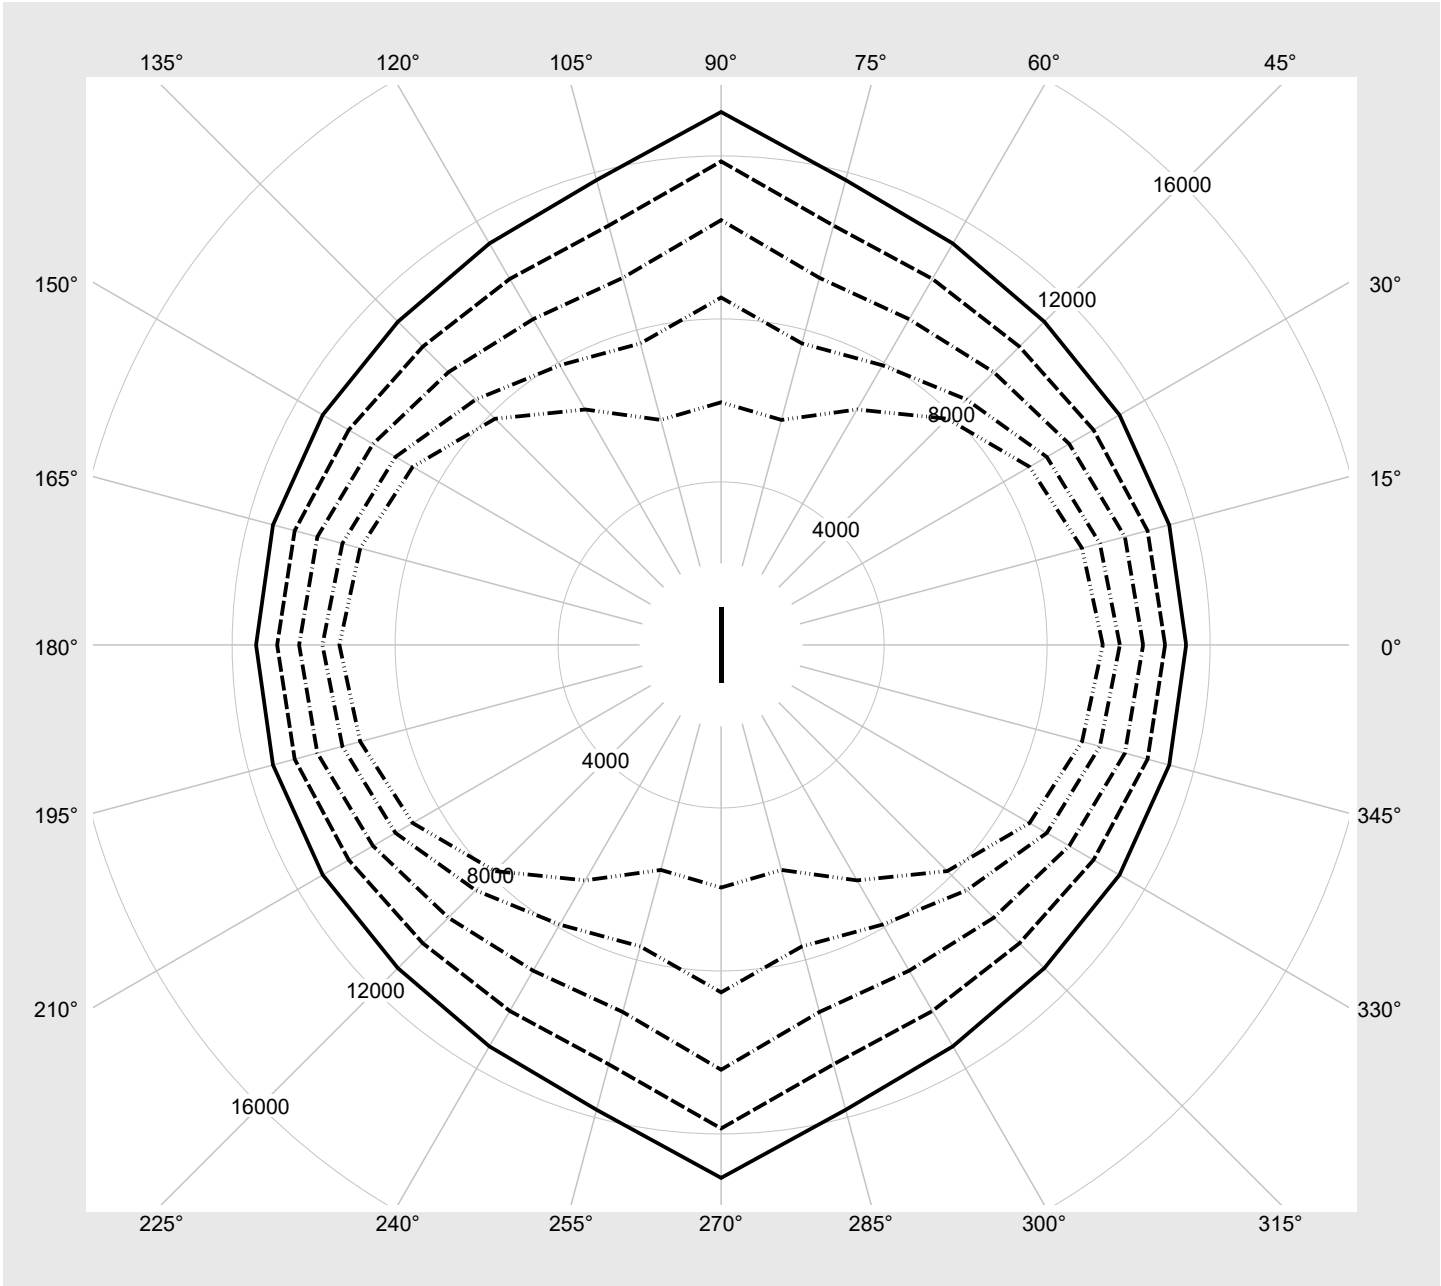

Photometric test report

Family Monsun® 21	Order number: 51FB10MP480B EAN: 4058352520079	LP number 58939_96
-----------------------------	--	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	8190	53.6
2	A	C	F	7390	47.6
3	A	D	E	6830	43.5
4	A	D	F	6190	39.0
5	B	C	E	5610	35.0
6	B	C	F	5010	31.0
7	B	D	E	4410	27.1
8	B	D	F	3860	23.6