

## Photometric test report

Family  
**MUSHROOM LUMINAIRE LED**

Order number: **5XA5235OF14H**  
EAN: **4058352833339**

LP number  
**57120\_32**



**Version** post-top- or mounting to wall arm  
**Optic** symmetric, wide distribution (PL1.2s)  
**Cover** cover transparent, PMMA  
**Lamps** LED 2700 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 3000 lm  
Power consumption = 21.8 W  
Luminous efficacy = 137.6 lm/W

serial  
documentation  
24.02.2023

siteco

Luminous intensity in cd/klm


**C180-0**

**C205-25**

**C210-30**

**C270-90**

**Imax: 401 cd/klm**

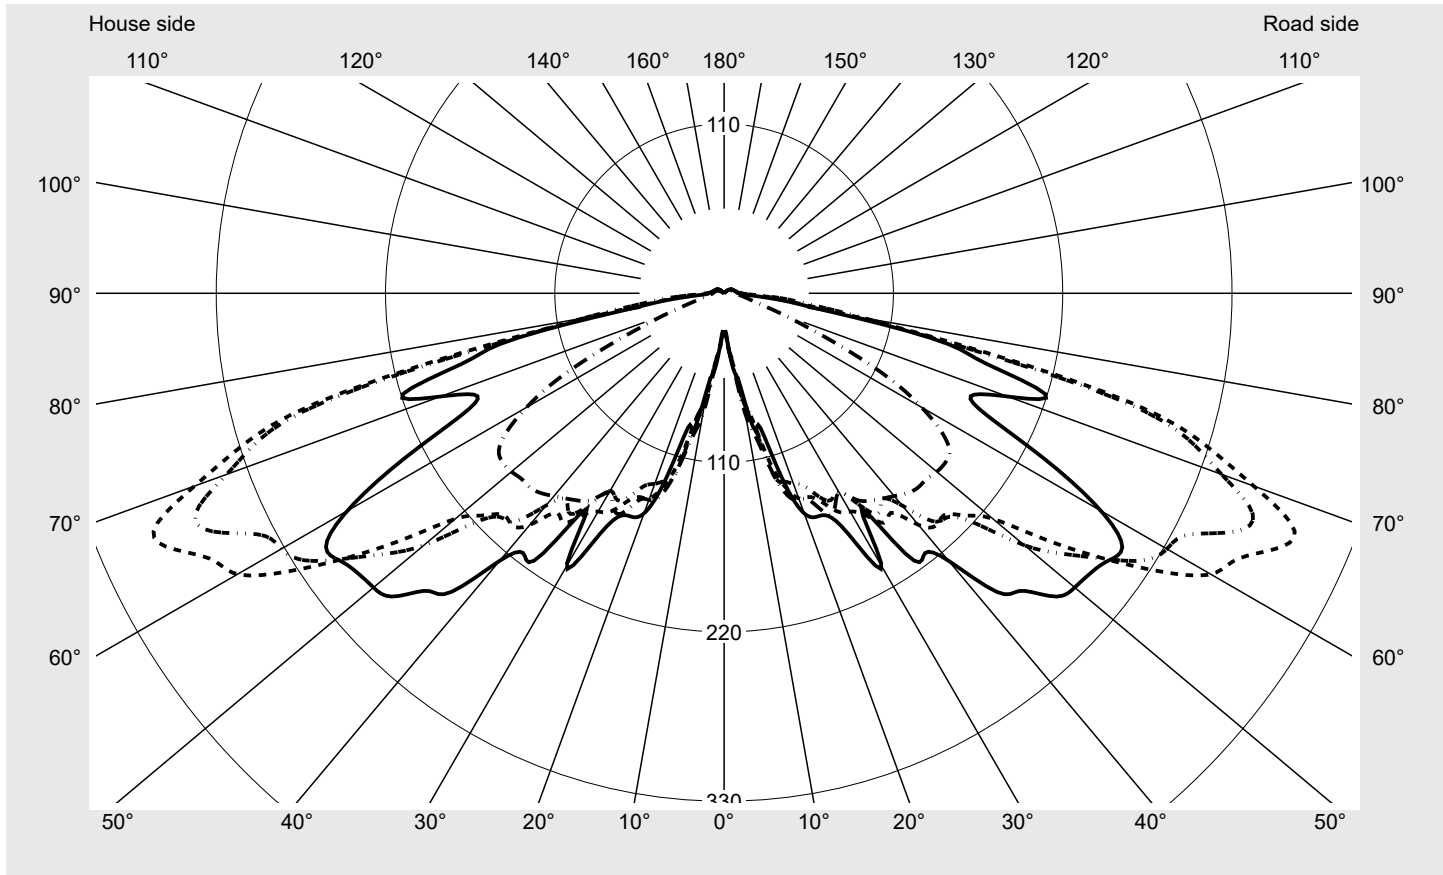

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	366.2
Imax 80°	92.9
Imax 90°	11.9
Imax >90°	9.1
Imax >95°	8.3

### Measurement conditions


DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235OF14H</b> <b>EAN: 4058352833339</b>	<b>LP number</b> <b>57120_32</b>
--	--	-------------------------------------



**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**

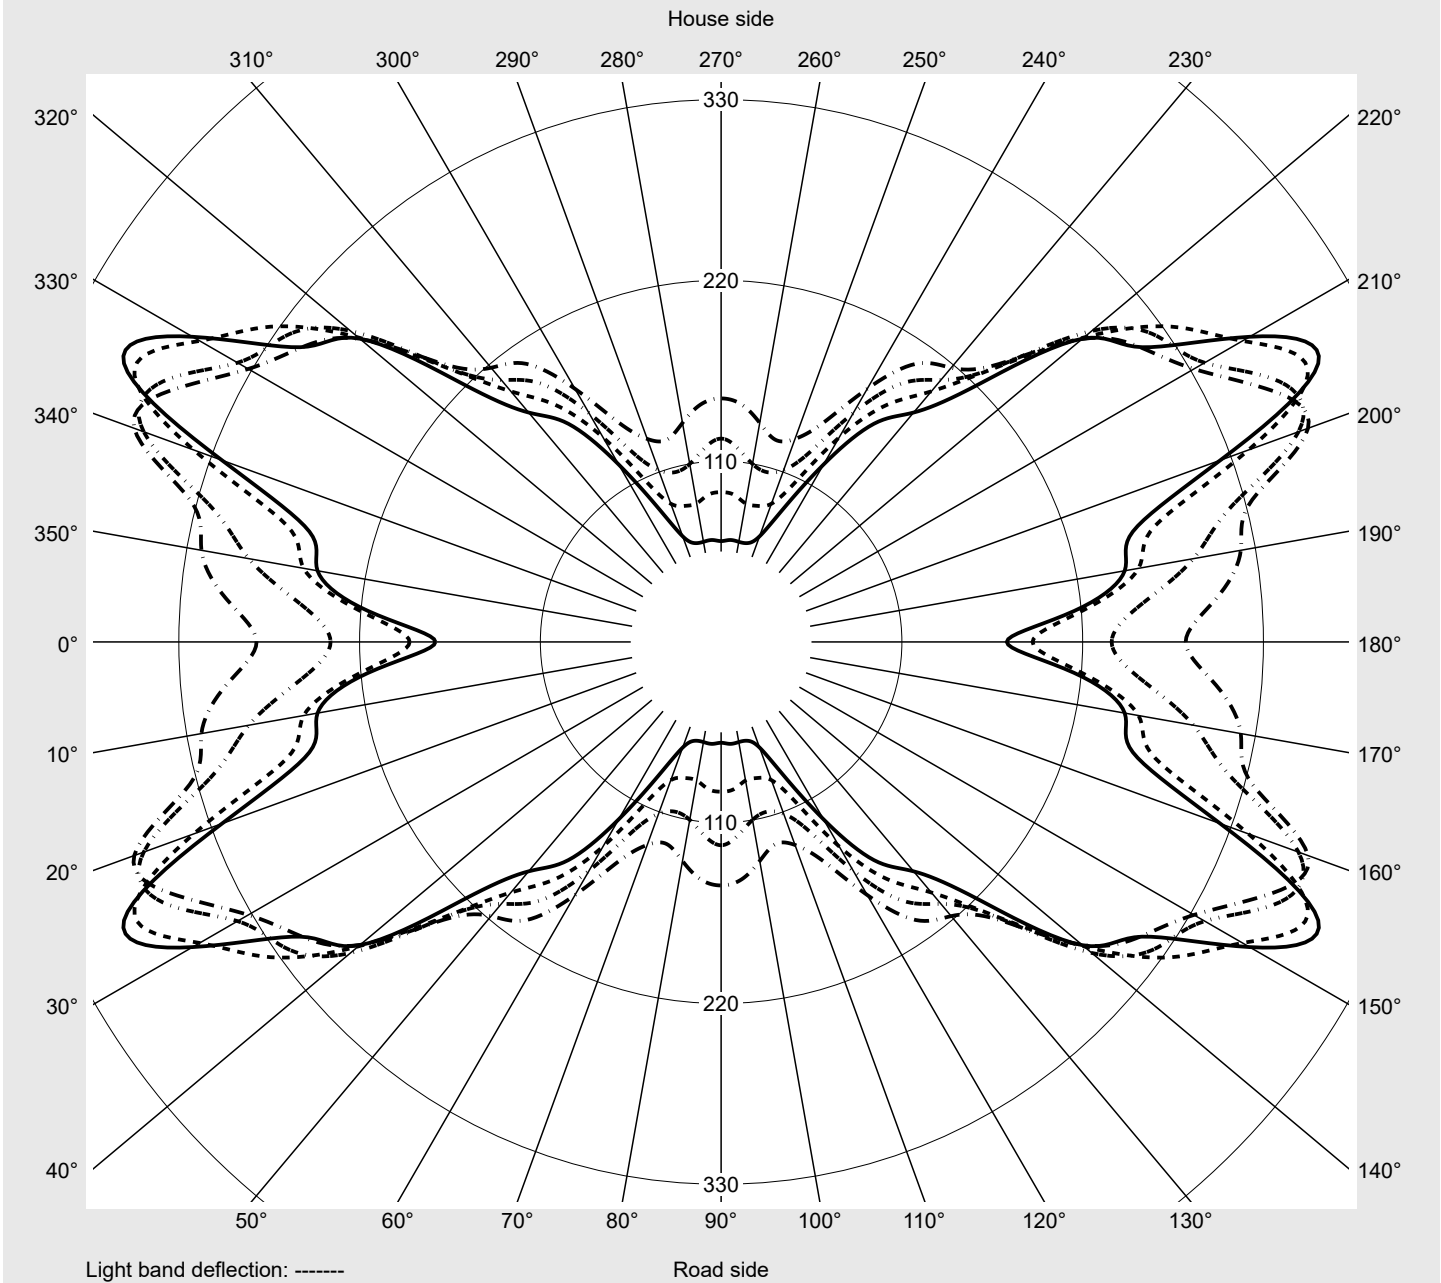

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235OF14H</b> <b>EAN: 4058352833339</b>	<b>LP number</b> <b>57120_32</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
Luminous intensity in cd/klm										
γ										
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	25.3	25.6	25.8	26.2	26.0	26.9	27.3	27.9	27.7	27.3
5,0°	37.9	38.2	38.8	38.6	38.4	37.9	37.7	38.1	38.5	39.5
7,5°	51.8	52.3	51.0	52.1	51.5	48.7	46.8	47.4	49.0	51.3
10,0°	62.2	62.3	63.7	66.4	69.8	70.7	71.1	72.3	71.6	70.4
12,5°	90.5	92.6	93.4	89.7	87.2	83.2	84.2	84.5	90.4	89.8
15,0°	89.9	101.2	103.2	104.3	102.5	112.4	120.5	115.8	118.4	112.5
17,5°	127.6	123.7	127.0	134.8	131.7	131.9	128.3	131.6	129.4	126.6
20,0°	152.3	150.9	149.7	151.7	149.4	141.9	131.8	124.5	123.8	118.1
22,5°	157.1	159.1	165.3	157.6	153.3	143.3	135.4	132.5	123.5	117.1
25,0°	159.6	152.0	158.6	149.9	152.2	149.3	145.8	138.6	124.4	115.9
27,5°	178.8	161.8	157.1	153.6	155.0	159.9	151.1	153.9	145.0	134.0
30,0°	204.8	179.3	197.8	179.9	169.4	163.8	148.3	140.2	142.5	147.0
32,5°	165.9	178.7	174.4	172.2	171.4	170.9	162.7	151.6	157.3	167.3
35,0°	208.5	216.0	210.4	200.0	189.3	181.9	174.8	164.6	163.3	167.0
37,5°	213.6	228.3	227.6	211.3	197.8	179.6	168.8	175.4	184.3	181.1
40,0°	226.9	244.3	235.1	220.1	211.0	196.5	180.1	184.7	195.4	201.2
42,5°	263.7	257.2	241.8	224.5	218.5	204.2	201.0	202.5	202.3	213.0
45,0°	273.3	272.5	263.5	241.7	228.7	203.3	205.7	220.2	223.9	220.2
47,5°	291.7	278.8	285.2	269.3	241.6	213.8	221.0	234.9	240.5	232.4
50,0°	297.4	298.3	308.8	291.1	266.5	227.9	254.7	255.7	245.8	234.4
52,5°	299.4	301.4	302.0	303.9	288.6	262.6	278.2	278.6	253.3	235.0
55,0°	303.7	321.4	318.2	320.1	319.5	300.0	300.6	291.2	265.1	239.5
57,5°	306.8	324.5	322.7	332.5	354.6	336.5	323.0	298.1	275.3	240.9
60,0°	282.7	302.4	321.1	334.7	380.0	365.2	332.2	312.2	286.8	239.2
62,5°	237.7	256.0	291.9	322.4	373.9	374.9	339.8	324.2	294.4	236.4
65,0°	189.6	221.3	257.9	273.5	341.5	393.8	366.4	334.5	288.2	235.8
67,5°	173.9	215.5	249.4	259.4	323.3	400.9	371.4	312.7	287.1	221.8
70,0°	196.1	224.3	258.1	273.0	300.6	366.2	344.0	295.3	256.8	203.8
72,5°	219.3	229.0	241.0	253.7	292.9	327.7	316.6	262.8	205.3	169.2
75,0°	175.7	183.5	207.7	221.0	264.4	272.0	262.5	196.3	145.4	124.9
77,5°	144.3	133.9	140.2	155.5	169.5	163.4	152.2	115.3	98.5	91.1
80,0°	74.0	69.8	74.4	92.9	86.6	85.0	91.9	83.7	74.9	58.4
82,5°	43.2	40.8	43.5	58.4	48.2	45.5	56.7	64.9	56.7	42.4
85,0°	20.8	21.1	22.9	28.4	27.5	30.8	37.8	41.7	33.1	27.9
87,5°	11.2	11.4	12.0	13.5	15.5	16.5	16.6	18.0	19.3	17.8
90,0°	10.0	10.2	10.5	11.2	11.4	11.7	11.9	11.8	11.2	10.8
92,5°	8.8	9.0	9.1	9.1	9.0	9.0	9.0	8.9	8.7	8.6
95,0°	8.6	8.6	8.7	8.5	8.4	8.3	8.2	7.9	7.9	7.7
97,5°	7.9	8.2	8.3	8.1	7.9	7.9	7.8	7.6	7.5	7.4
100,0°	7.5	7.7	7.8	7.8	7.7	7.5	7.5	7.3	7.1	7.0
102,5°	7.1	7.4	7.4	7.4	7.3	7.1	7.1	7.0	6.8	6.6
105,0°	6.9	7.0	7.1	7.0	7.0	6.7	6.7	6.7	6.6	6.4
107,5°	6.5	6.6	6.8	6.6	6.6	6.6	6.5	6.3	6.2	6.2
110,0°	6.1	6.2	6.4	6.3	6.2	6.2	6.1	6.0	6.0	5.8

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235OF14H</b> <b>EAN: 4058352833339</b>	<b>LP number</b> <b>57120_32</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	0.0	0.0
2,5°	27.2	27.6	27.8	27.7	28.4	29.5	28.6	27.8	27.7	0.3	0.4
5,0°	39.8	39.9	39.6	38.9	38.2	38.0	38.8	39.0	38.9	0.9	1.3
7,5°	55.9	57.1	58.1	55.1	53.8	53.1	52.9	53.0	51.2	1.9	3.2
10,0°	73.9	76.7	75.5	73.7	74.5	78.6	78.8	79.3	80.1	3.4	6.6
12,5°	91.8	95.2	93.6	89.1	88.9	90.9	93.7	95.6	95.8	5.4	12.0
15,0°	110.2	111.7	111.4	110.5	112.7	113.0	114.0	116.4	119.6	7.9	19.8
17,5°	122.6	119.6	121.1	120.0	125.5	131.7	136.5	139.4	138.0	10.6	30.4
20,0°	115.9	123.3	126.3	127.9	130.4	133.5	135.8	138.9	142.9	12.6	43.0
22,5°	120.8	126.7	131.7	134.3	135.8	139.7	144.3	146.7	145.7	14.7	57.7
25,0°	118.2	126.4	133.8	136.7	142.4	147.9	155.0	156.7	158.0	16.5	74.2
27,5°	129.8	129.5	140.9	144.7	147.0	149.0	152.3	154.5	156.1	18.9	93.1
30,0°	143.0	138.9	147.5	155.7	158.4	155.7	154.3	151.6	149.6	21.7	114.8
32,5°	166.8	162.8	160.6	165.8	165.6	158.5	157.5	159.3	158.8	24.3	139.1
35,0°	176.3	179.8	169.7	170.4	173.7	166.1	163.6	164.8	164.5	28.1	167.2
37,5°	183.4	194.4	187.2	181.6	178.8	168.5	166.4	168.2	168.2	31.3	198.5
40,0°	197.3	201.4	199.4	186.8	180.6	169.6	169.0	171.0	172.0	34.7	233.1
42,5°	212.1	207.6	206.6	194.1	181.0	171.8	172.2	174.6	176.1	38.1	271.3
45,0°	221.4	214.9	209.3	200.7	182.3	174.5	175.2	177.6	178.3	41.6	312.8
47,5°	228.2	222.4	212.0	201.2	181.3	175.8	176.0	177.8	178.6	45.2	358.1
50,0°	234.0	226.2	212.4	198.2	178.7	176.1	176.8	179.6	180.4	49.0	407.1
52,5°	235.9	230.6	212.6	190.0	173.6	173.4	176.5	180.7	181.0	52.2	459.3
55,0°	236.2	230.0	205.0	178.3	162.6	164.2	169.8	176.7	178.8	55.4	514.7
57,5°	229.9	223.0	194.8	163.2	148.3	149.5	156.3	163.6	167.5	57.5	572.1
60,0°	217.8	206.6	177.8	147.2	131.5	127.4	135.3	144.9	148.2	57.7	629.9
62,5°	208.1	192.1	160.8	127.2	111.3	107.0	110.0	118.1	123.7	55.8	685.6
65,0°	199.0	176.2	143.7	107.6	89.5	85.7	85.6	89.9	91.1	52.9	738.5
67,5°	182.2	162.0	124.6	89.2	68.4	62.3	61.9	62.3	61.4	50.3	788.8
70,0°	165.3	144.3	105.8	74.7	53.5	41.7	40.9	41.5	41.6	47.4	836.1
72,5°	138.3	119.1	87.5	57.9	42.2	29.5	27.2	26.5	27.3	42.8	879.0
75,0°	117.2	105.9	77.5	45.1	27.8	22.5	20.3	19.7	19.6	35.5	914.4
77,5°	92.7	91.2	66.1	33.4	19.5	17.3	16.3	16.0	15.7	24.6	939.0
80,0°	50.5	51.2	34.1	17.1	14.0	13.2	13.1	13.0	12.8	14.5	953.5
82,5°	33.2	24.3	18.0	12.2	11.3	10.9	10.8	10.7	10.8	9.3	962.8
85,0°	21.8	17.1	14.0	10.6	9.8	9.5	9.3	9.1	9.0	5.9	968.7
87,5°	15.0	12.1	10.5	9.3	8.9	8.7	8.3	8.1	7.7	3.5	972.2
90,0°	10.2	9.8	9.0	8.6	8.3	7.8	7.4	7.3	7.3	2.7	974.9
92,5°	8.5	8.3	8.3	8.1	7.9	7.4	7.1	6.9	6.9	2.3	977.2
95,0°	7.5	7.5	7.1	7.0	6.8	6.6	6.6	6.5	6.5	2.1	979.3
97,5°	7.1	7.0	6.8	6.6	6.6	6.4	6.3	6.3	6.3	2.0	981.3
100,0°	6.7	6.7	6.6	6.4	6.2	6.2	6.1	6.1	6.1	1.9	983.1
102,5°	6.6	6.5	6.2	6.2	6.0	5.9	5.9	5.8	5.7	1.8	984.9
105,0°	6.2	6.2	6.1	5.8	5.8	5.8	5.7	5.6	5.5	1.7	986.6
107,5°	6.0	5.8	5.8	5.8	5.5	5.5	5.5	5.4	5.1	1.6	988.2
110,0°	5.7	5.7	5.6	5.5	5.5	5.4	5.3	5.2	4.7	1.5	989.7

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235OF14H</b> <b>EAN: 4058352833339</b>	<b>LP number</b> <b>57120_32</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
		Luminous intensity in cd/klm								
γ										
112,5°	5.7	6.0	6.0	6.1	5.9	5.8	5.7	5.7	5.7	5.6
115,0°	5.5	5.6	5.7	5.7	5.7	5.7	5.6	5.4	5.4	5.3
117,5°	5.1	5.3	5.3	5.3	5.3	5.3	5.3	5.1	5.1	5.0
120,0°	5.5	5.0	4.9	5.1	5.2	5.0	4.9	4.9	4.9	4.9
122,5°	4.7	4.7	4.9	4.8	4.8	4.8	4.7	4.8	4.6	4.5
125,0°	4.3	4.3	4.4	4.4	4.3	4.3	4.3	4.3	4.2	4.3
127,5°	3.7	3.7	3.7	3.7	3.8	3.7	3.7	3.7	3.6	3.7
130,0°	3.3	2.9	2.9	3.1	3.1	3.0	3.0	2.9	2.9	2.9
132,5°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.3	2.2
135,0°	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9
137,5°	2.0	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
140,0°	1.6	1.6	1.6	1.5	1.6	1.5	1.6	1.6	1.5	1.5
142,5°	1.4	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147,5°	1.0	1.1	1.1	1.0	1.0	1.0	1.0	1.0	0.9	1.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90° 270°	Phi-zone	Total Phi-zone
	130° 230° 310°	125° 235° 305°	120° 240° 300°	115° 245° 295°	110° 250° 290°	105° 255° 285°	100° 260° 280°	95° 265° 275°			
		Luminous intensity in cd/klm								Luminous flux in lm/klm	
γ											
112,5°	5.6	5.5	5.4	5.3	5.2	5.2	5.1	5.0	4.1	1.4	991.1
115,0°	5.3	5.3	5.1	5.1	5.1	5.0	5.0	4.4	2.9	1.3	992.4
117,5°	5.0	4.9	4.9	4.9	4.8	4.9	4.8	4.0	2.4	1.2	993.6
120,0°	4.9	4.9	4.8	4.7	4.7	4.6	4.6	3.5	2.0	1.1	994.7
122,5°	4.5	4.5	4.5	4.5	4.5	4.5	4.4	3.2	2.0	1.0	995.8
125,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	2.9	1.8	0.9	996.7
127,5°	3.7	3.6	3.6	3.5	3.6	3.6	3.3	2.4	1.6	0.8	997.5
130,0°	2.9	2.9	2.8	2.8	2.9	2.9	2.7	2.0	1.6	0.6	998.0
132,5°	2.2	2.2	2.2	2.2	2.2	2.2	2.0	1.6	1.4	0.4	998.5
135,0°	2.0	2.0	2.0	2.0	2.0	2.0	1.8	1.6	1.4	0.4	998.9
137,5°	1.7	1.8	1.6	1.6	1.6	1.6	1.6	1.4	1.2	0.3	999.2
140,0°	1.5	1.5	1.6	1.5	1.6	1.6	1.5	1.2	1.2	0.3	999.5
142,5°	1.3	1.3	1.2	1.3	1.2	1.2	1.2	1.2	1.2	0.2	999.7
145,0°	1.2	1.1	1.1	1.2	1.2	1.2	1.2	1.0	1.2	0.2	999.9
147,5°	0.9	1.0	0.9	1.0	1.1	1.0	1.0	1.0	1.0	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235OF14H</b> <b>EAN: 4058352833339</b>	<b>LP number</b> <b>57120_32</b>
--	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3000	21.8	23.2	22.5
95	241	252	2846	20.6	21.9	21.2
90	229	250	2705	19.4	20.7	20.0
85	216	248	2551	18.3	19.4	18.8
80	203	246	2398	17.1	18.2	17.6
75	190	243	2244	15.9	16.9	16.4
70	178	241	2102	14.9	15.8	15.4
65	165	238	1949	13.8	14.7	14.2
60	152	235	1795	12.7	13.5	13.1
55	140	232	1654	11.7	12.4	12.0
50	127	229	1500	10.7	11.3	11.0
45	114	225	1346	9.6	10.1	9.8
40	102	221	1205	8.7	9.2	9.0
35	89	216	1051	7.7	8.1	7.9
30	76	210	898	6.8	7.1	7.0
25	63	203	744	5.8	6.1	5.9
20	51	195	602	5.0	5.2	5.1
15	39	185	461	4.0	4.3	4.2