

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2B51Y08HE
EAN: 4058352918883

LP number
59338_284



Version post-top or side-entry mounting, Smart Interface up/down
Optic asymmetric, extremely wide distribution (ST0.5a)
Cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ - DALI2
Rated values Net luminous flux = 8410 lm
Power consumption = 58.2 W
Luminous efficacy = 144.5 lm/W

serial
documentation
27.07.2023

siteco

Luminous intensity in cd/klm


C180-0

C192.5-12.5

C195-15

C270-90

Imax: 627 cd/klm

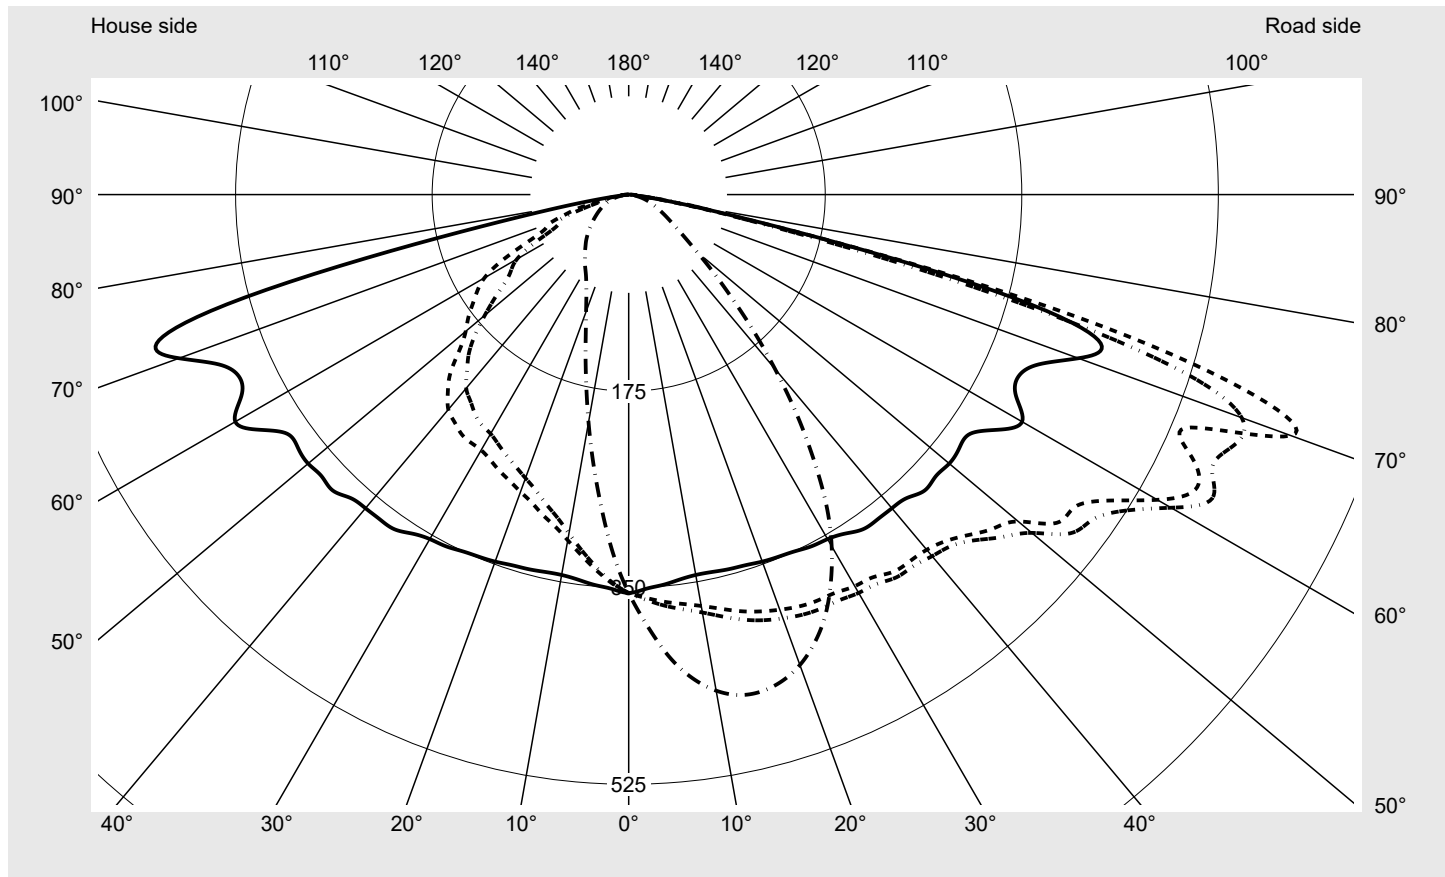

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	627.5
Imax 80°	70.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

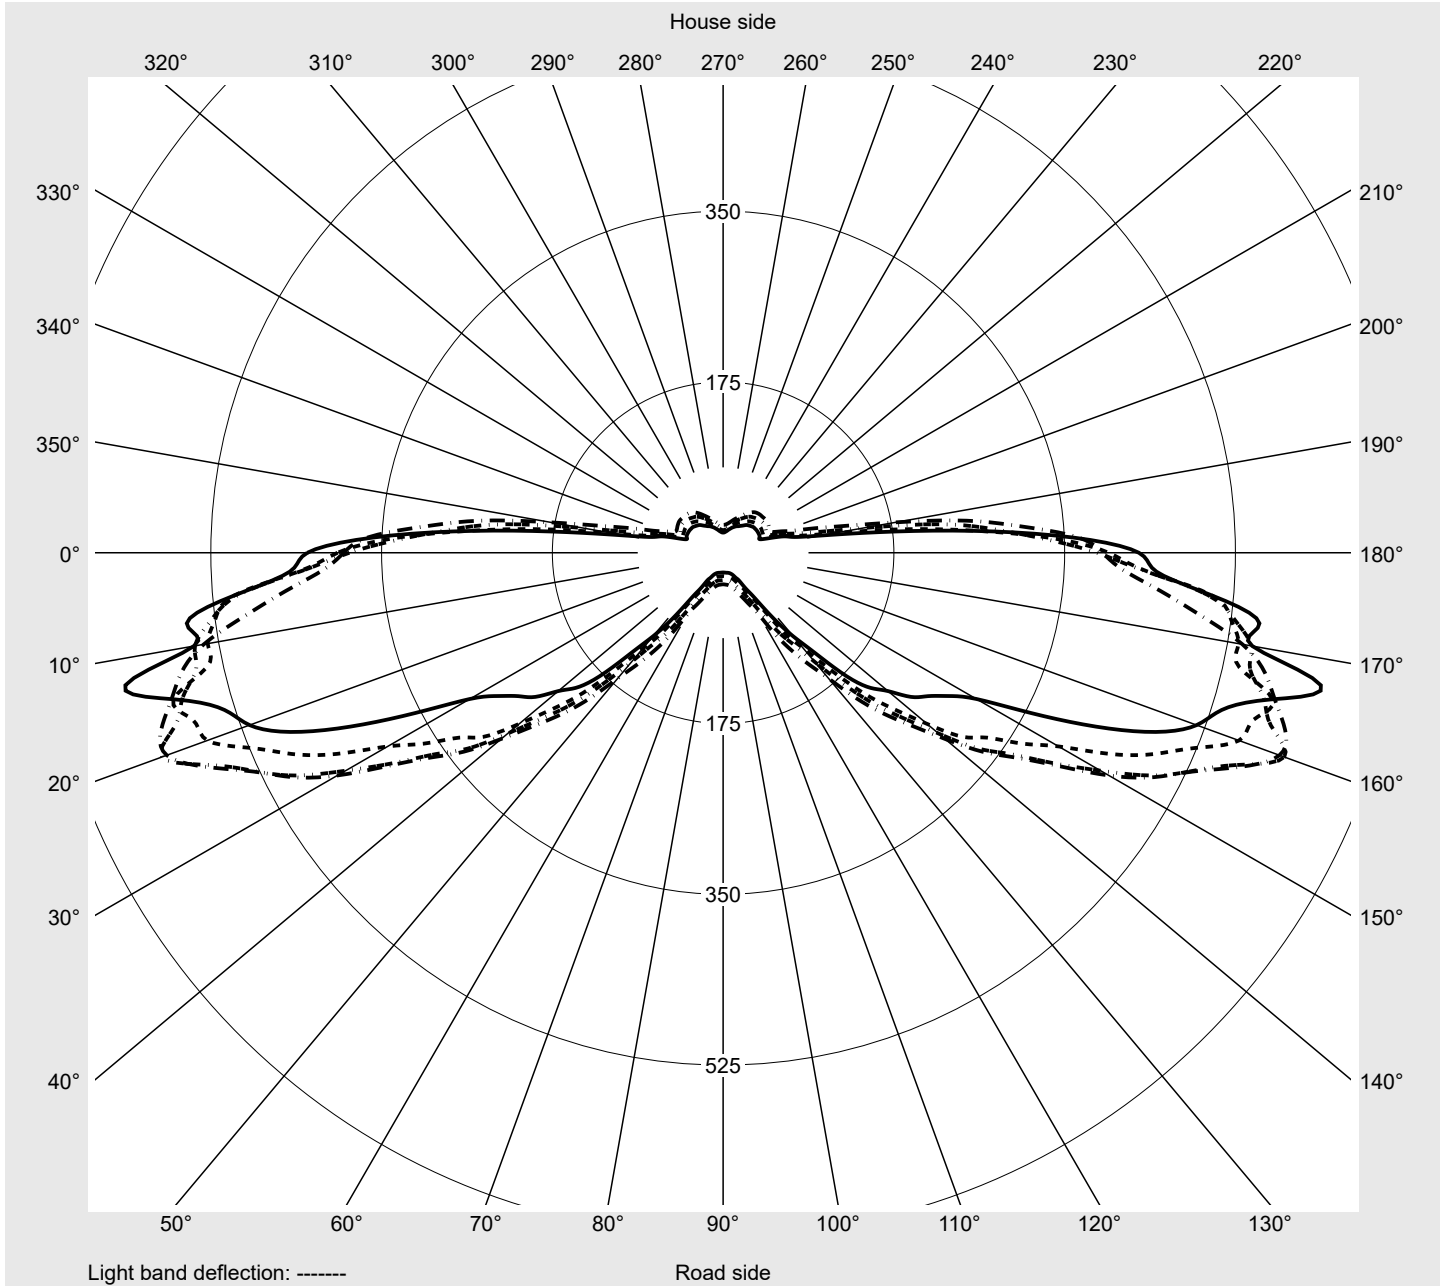

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	351.4	352.5	353.9	355.6	357.6	359.5	361.3	363.0	364.7	366.2	367.7	369.0	370.2	371.3	372.1
5,0°	348.9	351.4	354.1	356.9	360.4	363.9	367.4	370.5	373.3	376.1	378.9	381.4	383.7	386.0	388.2
7,5°	345.8	349.9	353.9	358.1	362.8	367.6	372.5	376.7	380.9	384.7	388.3	391.8	394.9	398.1	401.0
10,0°	343.9	349.5	354.8	360.2	366.0	371.9	377.8	383.3	388.2	392.8	397.0	400.9	404.6	408.4	411.6
12,5°	344.1	351.1	357.8	364.1	370.8	377.7	384.7	390.7	396.2	401.1	405.6	409.8	413.7	417.5	420.9
15,0°	345.2	354.0	361.7	368.8	376.4	384.0	391.8	398.4	404.4	409.7	414.4	418.6	422.4	426.1	429.4
17,5°	346.0	355.9	364.6	372.8	380.9	389.2	397.4	404.5	411.2	416.8	421.8	426.0	430.1	433.7	436.8
20,0°	347.7	358.7	368.2	376.5	385.1	393.3	401.5	409.0	415.8	421.3	426.1	430.2	433.9	437.4	440.2
22,5°	348.9	361.4	371.2	380.1	388.6	396.9	404.8	412.0	418.8	424.3	428.6	432.1	435.0	437.6	439.8
25,0°	350.4	363.3	373.7	382.5	390.9	398.7	406.5	413.3	419.5	424.4	428.6	431.9	434.0	436.1	437.7
27,5°	352.9	365.9	376.2	384.4	392.1	399.5	407.0	413.8	419.9	424.9	428.2	430.6	432.0	432.8	432.9
30,0°	354.2	367.9	378.8	387.7	395.7	402.6	409.5	415.3	420.2	423.9	426.8	428.7	429.5	429.0	427.5
32,5°	358.0	371.5	382.4	390.4	397.6	404.1	411.0	417.3	422.7	425.9	427.3	427.3	425.9	423.9	421.1
35,0°	363.7	377.0	387.3	395.7	403.4	410.2	415.9	419.9	422.5	425.1	426.9	427.3	425.5	420.1	413.9
37,5°	364.3	377.7	389.3	398.9	406.3	411.4	416.7	422.4	427.3	429.7	428.0	423.2	419.2	416.0	409.9
40,0°	364.6	378.1	389.8	399.3	406.4	412.9	420.3	425.6	426.9	424.4	422.6	422.1	420.2	411.6	398.9
42,5°	366.5	379.9	392.5	403.5	411.2	418.3	424.5	427.4	427.0	426.9	425.5	419.9	411.2	402.8	395.4
45,0°	372.6	385.7	398.3	410.3	420.6	428.5	435.3	438.7	439.0	436.5	431.8	423.9	412.3	400.5	384.3
47,5°	371.0	387.0	402.4	416.3	428.2	440.2	451.2	458.3	456.0	448.1	441.4	430.6	417.1	403.2	383.6
50,0°	372.6	387.9	404.4	420.9	436.1	452.8	468.6	473.6	471.1	465.5	456.1	442.1	421.8	402.4	379.2
52,5°	371.0	392.3	409.5	430.5	456.6	480.2	495.4	494.1	483.8	477.1	468.3	454.5	432.5	408.2	381.1
55,0°	371.3	393.3	411.6	428.4	456.6	484.9	504.4	511.3	506.2	496.1	482.6	462.3	434.6	408.8	385.8
57,5°	389.7	406.7	435.2	459.5	484.3	507.0	523.8	528.6	523.9	504.5	487.9	466.5	436.1	403.9	376.6
60,0°	404.5	420.8	453.9	486.2	524.6	543.5	557.6	571.4	566.2	534.5	502.7	479.6	451.2	407.2	372.6
62,5°	388.9	410.8	450.0	494.0	540.4	568.8	585.8	603.9	606.7	573.4	530.7	498.0	456.4	406.2	365.9
65,0°	383.0	433.0	499.0	529.1	549.6	553.2	573.4	588.6	612.0	568.5	529.6	494.3	446.7	401.4	359.8
67,5°	395.1	434.6	503.0	525.1	536.3	541.9	583.3	569.7	562.5	522.9	487.9	446.4	396.9	364.2	330.4
70,0°	426.1	444.5	503.1	554.4	550.7	627.5	580.9	535.8	516.4	479.9	421.6	355.7	299.7	273.3	256.2
72,5°	440.7	442.5	505.1	561.0	554.6	570.8	505.6	448.7	436.3	393.6	315.4	246.7	202.7	179.6	161.8
75,0°	353.4	353.2	367.5	449.0	400.5	388.9	318.4	282.4	270.2	255.8	213.4	173.4	150.4	138.4	122.7
77,5°	153.0	205.1	206.9	212.1	170.9	150.7	128.2	120.2	120.9	126.0	124.3	112.0	102.4	92.8	76.5
80,0°	50.0	70.6	61.8	49.7	44.1	45.7	58.2	61.5	58.1	51.4	54.3	52.5	46.8	41.2	34.1
82,5°	10.3	10.3	10.4	10.8	11.5	13.2	15.9	13.6	14.2	12.7	13.7	12.2	11.3	10.9	10.4
85,0°	6.2	6.3	6.4	6.4	6.4	6.4	6.4	6.3	6.2	6.0	5.9	5.7	5.5	5.4	5.2
87,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	373.1	374.3	375.4	376.3	377.2	378.1	379.2	380.1	380.9	381.5	382.2	382.5	382.8	382.9	383.1
5,0°	390.2	392.4	394.6	396.6	398.4	400.1	401.9	403.5	405.1	406.4	407.6	408.5	409.2	409.8	410.4
7,5°	404.0	406.9	409.7	412.2	414.6	416.9	419.1	421.3	423.2	424.9	426.4	427.7	428.8	429.8	430.6
10,0°	414.9	418.2	421.3	424.0	426.6	429.1	431.5	433.9	436.1	437.9	439.7	441.0	442.4	443.6	444.7
12,5°	424.3	427.4	430.5	433.3	435.8	438.1	440.3	442.4	444.3	446.0	447.5	448.9	450.3	451.4	452.5
15,0°	432.4	434.9	437.5	439.7	441.8	443.6	445.2	446.8	448.1	449.4	450.5	451.4	452.3	453.3	454.4
17,5°	439.5	441.5	443.0	444.1	445.2	446.1	446.6	447.3	448.0	448.5	449.2	449.5	450.0	450.5	451.1
20,0°	442.5	444.2	445.6	446.4	446.6	446.3	445.8	445.0	444.4	444.0	443.7	443.5	443.5	443.4	443.5
22,5°	441.4	442.5	443.3	443.5	443.4	442.7	441.4	439.7	437.6	435.5	433.9	432.7	431.7	431.0	430.4
25,0°	438.0	437.9	437.5	436.5	435.5	434.2	432.2	429.5	426.4	423.1	420.1	417.5	415.6	414.3	413.1
27,5°	432.0	430.3	428.5	426.4	423.9	421.2	418.0	414.1	409.6	404.9	400.8	397.1	394.1	391.8	390.3
30,0°	424.3	421.1	417.3	413.5	409.4	404.7	400.0	394.2	388.3	382.2	377.1	372.6	369.0	366.0	364.1
32,5°	416.4	411.0	405.2	399.1	392.4	385.5	378.5	371.0	363.7	356.4	349.8	343.8	339.5	336.4	333.7
35,0°	407.1	399.5	391.2	383.1	374.4	365.2	355.9	345.6	336.1	326.9	318.7	311.6	305.8	301.1	297.7
37,5°	398.9	387.2	377.6	368.5	357.6	345.6	333.3	320.6	309.2	297.8	288.0	279.8	272.8	266.4	261.4
40,0°	388.6	377.7	363.4	350.5	338.1	323.8	309.4	294.9	281.7	269.4	258.6	248.9	240.1	232.1	225.1
42,5°	379.2	360.5	347.3	333.0	315.9	301.4	286.9	272.2	257.8	244.2	231.8	220.1	209.5	200.4	192.6
45,0°	365.4	350.4	331.0	312.4	298.3	281.2	265.0	248.4	233.3	218.4	204.6	191.6	180.5	170.9	162.5
47,5°	362.9	340.3	318.3	301.3	276.8	261.3	243.9	225.2	209.7	194.5	180.2	167.1	155.9	146.2	137.3
50,0°	358.5	332.7	308.1	282.4	259.1	239.4	221.4	202.3	184.7	169.9	156.6	144.4	133.2	123.0	113.7
52,5°	352.1	321.5	295.1	264.4	238.8	217.9	199.1	178.1	159.4	147.4	136.2	124.6	113.4	103.0	93.8
55,0°	356.2	320.6	284.5	247.5	219.6	197.7	175.7	154.3	140.6	126.9	117.0	105.7	94.7	84.5	75.9
57,5°	347.0	311.5	276.9	244.0	214.2	192.1	163.1	139.5	125.2	111.5	98.1	87.0	76.7	67.7	60.7
60,0°	344.3	308.6	273.8	243.2	217.0	186.5	153.9	129.8	113.3	97.9	80.8	69.3	60.8	53.8	48.7
62,5°	334.9	296.8	262.4	233.7	202.4	168.2	143.9	121.9	98.3	72.4	61.5	53.8	47.9	43.2	39.6
65,0°	329.6	288.2	251.2	219.6	182.4	145.9	118.5	99.9	75.6	58.4	48.8	42.7	38.2	34.9	32.5
67,5°	310.0	272.8	237.0	203.4	161.9	127.5	103.9	68.6	52.6	43.6	38.1	34.0	30.6	28.2	26.6
70,0°	242.7	220.5	205.0	179.0	139.2	111.9	84.9	57.0	44.3	33.6	29.5	26.4	24.1	22.8	21.9
72,5°	159.0	155.2	154.1	140.7	110.4	96.1	59.4	43.8	33.2	25.7	21.4	19.6	18.8	18.2	17.8
75,0°	105.3	97.6	92.3	83.4	66.5	53.3	32.1	32.0	22.5	17.9	16.4	15.4	14.7	14.3	14.2
77,5°	63.0	57.1	49.0	45.4	40.8	27.8	21.4	19.6	14.2	13.3	12.6	12.0	11.5	11.1	10.9
80,0°	26.2	24.3	22.6	17.3	14.0	13.2	14.1	12.7	10.2	9.6	9.2	8.8	8.5	8.3	7.9
82,5°	9.1	8.7	8.5	7.7	7.5	7.3	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7	5.4
85,0°	5.1	5.1	4.9	4.8	4.6	4.5	4.3	4.1	3.8	3.6	3.3	3.2	3.1	3.1	3.1
87,5°	2.6	2.6	2.6	2.5	2.4	2.4	2.3	2.1	2.0	1.9	1.7	1.6	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	383.3	383.7	383.9	384.1	384.4	384.6	384.6	350.3	349.1	348.2	347.1	346.3	345.3	344.5	343.4
5,0°	410.9	411.5	412.0	412.5	412.8	412.9	413.0	345.8	343.2	340.5	337.9	335.3	332.8	330.2	327.6
7,5°	431.5	432.2	432.9	433.5	433.8	434.1	434.2	341.3	336.8	332.3	327.9	323.8	319.6	315.5	311.4
10,0°	445.6	446.5	447.2	447.9	448.2	448.4	448.5	337.4	331.0	324.7	318.4	312.5	306.3	300.4	294.5
12,5°	453.6	454.4	455.1	455.7	456.0	456.3	456.4	335.6	327.3	319.0	310.7	302.7	294.3	286.4	278.5
15,0°	455.0	456.0	456.7	457.1	457.5	457.8	457.9	334.9	325.0	315.1	304.9	295.3	284.9	275.3	265.6
17,5°	451.8	452.6	453.0	453.5	453.8	454.1	454.2	334.1	322.2	310.6	298.8	287.4	275.8	264.6	253.7
20,0°	443.6	443.9	444.5	444.9	445.2	445.6	445.7	334.7	321.0	307.6	294.2	281.6	268.7	256.5	244.3
22,5°	430.4	430.2	430.5	431.0	431.5	431.9	432.2	334.3	319.4	304.8	289.9	276.2	262.3	249.2	235.9
25,0°	412.3	412.0	412.1	412.5	413.1	413.6	413.9	334.9	318.3	302.2	286.3	271.6	256.6	242.5	228.4
27,5°	389.1	388.4	388.2	388.5	389.1	389.7	389.7	335.8	318.1	300.0	282.3	266.5	251.0	235.8	220.2
30,0°	362.6	361.1	360.4	360.3	361.0	361.4	361.4	336.2	317.0	297.2	278.7	262.7	245.9	229.2	212.9
32,5°	331.4	329.3	327.8	327.2	327.3	327.6	327.5	339.9	318.9	297.4	278.0	261.8	243.4	224.7	206.7
35,0°	294.4	291.3	289.0	287.7	287.2	286.8	286.5	345.0	322.6	299.4	278.5	259.9	238.5	217.9	200.2
37,5°	257.2	253.2	250.0	247.8	246.4	245.4	244.8	344.9	321.1	295.9	274.5	255.0	231.6	210.9	194.7
40,0°	219.8	215.0	210.8	207.3	204.9	203.3	202.6	346.8	318.7	290.9	270.8	249.9	225.0	206.1	189.9
42,5°	186.1	180.1	174.7	170.2	167.0	165.0	164.3	344.6	311.6	282.4	262.5	238.4	213.1	196.7	175.7
45,0°	154.9	147.6	141.1	135.8	132.3	130.1	129.4	351.4	311.5	280.5	256.6	224.4	201.5	183.0	155.7
47,5°	128.9	120.9	114.0	108.3	104.6	102.5	101.8	346.0	301.3	268.4	238.5	203.9	185.9	156.3	131.4
50,0°	105.2	97.1	90.4	85.0	81.7	79.9	79.4	347.9	301.8	263.6	223.8	189.5	167.3	133.0	118.1
52,5°	85.4	77.8	72.0	67.7	65.4	64.0	63.6	341.1	290.7	250.0	209.8	180.0	149.3	122.3	106.1
55,0°	68.5	62.2	57.8	55.1	53.6	52.7	52.4	340.1	283.3	239.2	197.9	169.5	132.8	111.5	89.8
57,5°	54.8	50.5	47.5	45.8	44.9	44.2	44.1	358.4	294.5	241.3	192.4	159.8	123.7	100.2	78.5
60,0°	45.0	42.0	40.1	39.0	38.4	37.9	37.7	372.1	308.5	252.4	192.2	148.3	114.8	84.3	72.6
62,5°	37.1	35.2	33.9	33.2	32.8	32.5	32.4	363.9	307.8	251.7	179.4	126.8	96.8	75.1	64.4
65,0°	30.8	29.6	29.0	28.6	28.4	28.1	28.0	328.8	277.9	223.9	145.5	98.0	76.2	64.3	53.4
67,5°	25.7	25.1	24.7	24.4	24.2	24.0	23.9	338.6	259.4	184.3	115.3	80.8	67.7	56.0	47.4
70,0°	21.4	21.0	20.8	20.6	20.4	20.3	20.2	358.6	257.2	162.1	101.4	74.6	64.8	49.8	40.4
72,5°	17.4	17.2	17.1	16.9	16.7	16.6	16.6	335.2	240.6	184.7	112.8	59.2	46.1	34.5	33.5
75,0°	14.0	13.8	13.7	13.5	13.3	13.3	13.2	268.1	215.0	161.6	101.7	45.0	29.4	26.2	27.3
77,5°	10.7	10.5	10.3	10.2	9.9	9.8	9.6	138.3	134.3	95.9	50.4	21.9	19.1	19.8	21.0
80,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	61.0	45.2	28.8	25.5	18.3	12.8	13.6	14.7
82,5°	5.1	4.9	4.7	4.6	4.5	4.4	4.3	10.1	9.2	8.6	8.2	7.8	7.8	8.1	8.4
85,0°	3.0	2.8	2.7	2.6	2.5	2.4	2.3	5.8	5.8	5.6	5.3	5.1	4.9	4.7	4.5
87,5°	1.2	1.2	1.2	1.1	1.0	0.9	0.9	3.2	3.1	3.0	2.9	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
--	--	-------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	342.5	341.5	340.5	339.1	337.4	335.7	334.2	333.3	332.3	331.4	330.5	329.4	328.5	327.5	326.8
5,0°	325.2	322.7	320.1	317.2	314.2	311.3	308.6	306.2	304.0	301.8	299.7	297.6	295.6	293.7	292.1
7,5°	307.3	303.1	299.0	294.8	290.5	286.4	282.4	278.9	275.6	272.4	269.2	266.2	263.4	260.7	258.3
10,0°	288.8	283.1	277.6	272.1	266.4	261.3	256.3	251.6	247.3	243.1	239.1	235.3	231.8	228.5	225.6
12,5°	270.9	263.5	256.3	249.3	242.5	236.1	230.1	224.6	219.5	214.6	210.0	205.8	201.9	198.1	194.8
15,0°	256.2	247.1	238.2	229.8	221.8	214.1	207.0	200.5	194.6	189.1	184.1	179.6	175.5	171.6	168.2
17,5°	242.8	232.1	222.1	212.4	203.1	194.9	186.7	179.3	172.6	166.6	161.1	156.3	152.1	148.3	145.1
20,0°	232.3	220.5	209.5	198.9	188.8	179.4	170.6	162.6	155.2	148.6	142.8	137.9	133.7	129.9	126.9
22,5°	223.1	210.7	198.7	187.2	176.5	166.6	157.2	148.6	140.6	133.7	127.8	122.8	118.7	115.2	112.5
25,0°	214.6	201.5	189.2	177.7	166.4	156.2	146.2	137.0	128.7	121.7	115.8	111.2	107.4	104.2	101.7
27,5°	205.6	192.2	179.7	168.0	156.2	145.4	135.3	126.5	118.5	111.7	106.2	101.9	98.6	95.9	93.6
30,0°	197.6	183.5	170.6	158.0	145.8	135.1	125.3	117.2	110.1	104.0	99.1	95.2	92.3	90.0	88.0
32,5°	190.9	175.8	161.1	147.6	135.5	125.3	116.7	109.3	102.9	97.5	93.3	90.1	87.6	85.4	83.6
35,0°	184.2	167.1	151.0	137.2	125.8	116.5	108.6	102.0	96.5	92.1	88.8	86.1	83.9	81.9	80.1
37,5°	178.0	158.9	141.7	128.8	117.5	108.5	101.3	96.0	92.0	88.6	86.0	83.7	81.7	79.6	77.7
40,0°	168.5	147.7	133.5	120.8	109.3	101.0	95.4	91.6	88.5	85.9	83.8	81.8	79.8	77.8	75.7
42,5°	151.9	136.6	124.1	109.6	99.9	94.9	91.3	88.4	86.1	84.2	82.4	80.6	78.5	76.2	73.9
45,0°	137.3	124.8	108.5	97.2	92.9	90.1	87.6	85.7	84.1	82.6	81.0	79.0	76.8	74.4	72.0
47,5°	120.4	105.9	94.1	90.1	87.6	85.5	83.9	82.8	81.9	80.6	79.1	77.1	75.1	72.4	69.7
50,0°	102.4	88.1	84.3	82.5	81.2	80.4	80.1	79.8	79.0	78.0	76.5	74.7	72.4	69.7	67.0
52,5°	86.3	80.5	77.4	76.1	75.5	75.5	75.7	75.9	75.7	74.9	73.2	71.5	69.3	66.8	64.0
55,0°	79.7	74.5	71.4	69.9	69.4	69.9	70.5	70.9	71.1	70.7	69.6	68.0	65.7	63.2	60.5
57,5°	71.0	65.7	62.1	62.4	63.4	64.7	65.3	65.7	65.8	65.4	64.9	63.9	62.0	59.6	56.8
60,0°	65.2	58.1	56.9	57.6	58.6	59.4	60.0	60.2	60.2	60.2	60.0	59.2	57.8	55.5	52.8
62,5°	55.7	53.1	53.3	54.1	54.7	55.3	55.3	55.0	54.6	54.4	54.1	53.4	52.4	50.5	48.3
65,0°	49.2	48.7	49.3	50.1	50.9	51.3	51.1	50.6	50.1	49.3	48.4	47.3	46.5	44.9	43.2
67,5°	44.8	45.1	45.3	45.8	46.1	46.2	46.0	45.7	45.0	44.1	43.0	42.0	40.5	38.9	37.7
70,0°	40.2	41.1	41.3	41.4	41.4	41.2	40.9	40.7	39.9	39.0	38.1	37.1	35.4	33.9	32.6
72,5°	34.5	36.1	36.6	36.6	36.5	36.4	36.0	35.3	34.8	34.4	33.6	32.2	30.8	29.4	28.3
75,0°	28.8	30.2	30.9	31.3	31.4	31.4	31.3	30.8	30.3	30.0	29.2	28.0	26.7	25.5	24.4
77,5°	22.6	23.8	24.8	25.3	25.5	25.8	26.0	25.8	25.6	25.8	25.0	24.0	22.8	21.7	20.6
80,0°	15.8	16.8	17.7	18.5	19.0	19.2	19.2	19.2	19.4	20.1	19.8	19.2	18.4	17.6	16.9
82,5°	8.9	9.3	9.8	10.6	11.3	11.8	12.0	12.1	12.1	12.5	13.0	13.0	12.9	12.7	12.5
85,0°	4.4	4.3	4.2	4.0	3.9	3.8	3.8	3.9	4.0	4.2	4.6	5.0	5.5	5.9	6.2
87,5°	2.6	2.4	2.3	2.3	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	0.5	0.5
2,5°	326.1	325.4	324.7	324.0	323.3	322.7	322.1	321.6	320.9	320.4	320.0	319.8	319.7	4.2	4.8
5,0°	290.4	289.0	287.5	286.3	285.1	284.0	283.0	282.1	281.2	280.5	279.9	279.6	279.4	8.3	13.1
7,5°	255.9	253.8	251.8	250.0	248.3	246.8	245.5	244.3	243.3	242.4	241.8	241.4	241.3	12.2	25.3
10,0°	222.7	220.1	217.7	215.5	213.5	211.8	210.3	209.0	207.9	207.0	206.4	206.1	205.9	15.9	41.3
12,5°	191.7	189.1	186.5	184.1	182.1	180.3	178.7	177.3	176.3	175.4	174.8	174.5	174.5	19.4	60.6
15,0°	165.0	162.3	159.8	157.6	155.6	153.8	152.3	151.1	150.1	149.3	148.8	148.5	148.4	22.6	83.3
17,5°	142.0	139.5	137.2	135.2	133.4	131.9	130.5	129.4	128.5	127.8	127.3	127.0	127.0	25.7	108.9
20,0°	124.1	121.9	119.9	118.1	116.6	115.3	114.1	113.1	112.4	111.8	111.3	111.0	110.9	28.5	137.4
22,5°	110.0	108.0	106.2	104.7	103.4	102.3	101.3	100.4	99.7	99.1	98.8	98.6	98.5	31.1	168.5
25,0°	99.6	97.9	96.3	94.9	93.7	92.7	91.8	91.1	90.5	89.9	89.6	89.4	89.3	33.4	201.9
27,5°	91.6	90.1	88.7	87.4	86.3	85.4	84.5	83.8	83.3	82.9	82.5	82.3	82.3	35.4	237.3
30,0°	86.2	84.6	83.2	81.9	80.9	80.0	79.3	78.6	78.0	77.6	77.3	77.1	77.1	37.0	274.3
32,5°	81.9	80.5	79.1	77.9	76.7	75.6	74.8	74.1	73.4	72.9	72.7	72.5	72.5	38.3	312.7
35,0°	78.4	76.8	75.4	74.1	72.9	71.7	70.7	69.7	69.0	68.4	68.1	67.9	67.8	39.3	352.0
37,5°	75.9	74.1	72.5	70.9	69.5	68.2	67.0	66.0	65.2	64.5	64.1	63.9	63.8	39.9	391.9
40,0°	73.5	71.5	69.7	67.9	66.2	64.7	63.3	62.2	61.4	60.7	60.2	60.0	59.8	40.2	432.1
42,5°	71.4	69.2	67.1	65.0	63.0	61.4	60.0	58.7	57.8	57.1	56.6	56.3	56.2	40.3	472.4
45,0°	69.3	66.9	64.3	62.0	59.8	58.0	56.4	55.0	54.1	53.3	52.8	52.4	52.3	40.4	512.8
47,5°	66.8	64.1	61.4	58.8	56.5	54.5	52.9	51.6	50.5	49.5	49.0	48.6	48.5	40.4	553.2
50,0°	64.0	61.2	58.2	55.7	53.2	51.1	49.3	47.8	46.6	45.7	45.0	44.7	44.6	40.4	593.6
52,5°	61.0	58.0	55.2	52.5	50.1	48.0	46.1	44.4	43.1	42.1	41.4	41.1	41.0	40.5	634.2
55,0°	57.7	54.8	51.9	49.3	46.9	44.9	42.9	41.3	40.0	38.9	38.2	37.8	37.7	40.5	674.7
57,5°	53.9	51.2	48.5	46.0	43.8	41.6	39.8	38.2	36.9	35.8	35.0	34.6	34.4	41.1	715.7
60,0°	49.9	47.3	44.9	42.7	40.5	38.5	36.7	35.1	33.8	32.7	32.0	31.6	31.4	42.3	758.0
62,5°	45.9	43.4	41.1	39.0	37.1	35.3	33.5	32.0	30.7	29.8	29.1	28.7	28.6	42.5	800.6
65,0°	41.1	39.3	37.6	35.6	33.7	32.2	30.6	29.2	28.1	27.0	26.4	26.0	26.0	41.7	842.2
67,5°	36.4	35.0	33.5	32.1	30.6	29.2	27.8	26.5	25.5	24.5	23.8	23.4	23.2	39.6	881.8
70,0°	31.4	30.7	29.7	28.6	27.5	26.2	25.0	23.9	22.8	21.9	21.2	20.8	20.7	37.3	919.1
72,5°	27.4	26.5	25.6	24.9	24.0	23.0	22.0	20.8	19.8	19.0	18.4	17.9	17.9	32.6	951.7
75,0°	23.4	22.5	21.6	20.8	20.2	19.4	18.5	17.6	16.7	15.9	15.3	14.9	14.7	24.1	975.8
77,5°	19.7	18.9	18.0	17.2	16.4	15.7	15.2	14.3	13.5	12.8	12.1	11.8	11.7	13.5	989.3
80,0°	16.1	15.3	14.5	13.7	13.0	12.3	11.5	10.8	10.0	9.4	8.8	8.4	8.3	6.3	995.6
82,5°	12.1	11.6	11.2	10.6	9.8	9.1	8.2	7.4	6.7	6.3	5.8	5.6	5.5	2.5	998.2
85,0°	6.4	6.4	6.4	6.3	6.0	5.4	4.8	4.2	3.7	3.3	2.9	2.0	2.5	1.3	999.4
87,5°	1.3	1.2	1.2	1.2	1.3	1.4	1.3	1.3	1.1	0.8	0.5	0.3	0.3	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2B51Y08HE EAN: 4058352918883	LP number 59338_284
--	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	8410	58.2	60.6	59.4
95	241	252	7980	54.7	56.9	55.8
90	229	250	7582	51.5	53.5	52.5
85	216	248	7152	48.2	50.1	49.2
80	203	246	6721	44.9	46.7	45.8
75	190	243	6291	41.7	43.4	42.6
70	178	241	5894	38.8	40.3	39.6
65	165	238	5463	35.7	37.2	36.4
60	152	235	5033	32.8	34.0	33.4
55	140	232	4635	30.0	31.2	30.6
50	127	229	4205	27.1	28.1	27.6
45	114	225	3775	24.3	25.2	24.8
40	102	221	3377	21.7	22.5	22.1
35	89	216	2947	19.0	19.7	19.4
30	76	210	2516	16.5	17.0	16.8
25	63	203	2086	13.8	14.3	14.0
20	51	195	1689	11.4	11.7	11.6
15	38	184	1258	8.8	9.0	8.9
14	35	181	1159	8.2	8.4	8.3