

# Photometric test report

<b>Family</b> <b>Floodlight FL21 midi</b>	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> <b>59367_121</b>
	<b>Version</b> Mast bracket <b>Optic</b> asymmetric distribution PL33T <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 35350 lm Power consumption = 270.2 W Luminous efficacy = 130.8 lm/W	<b>serial documentation</b> <b>22.08.2023</b>



**Luminous intensity in cd/klm** C180-0 C240-60 C245-65 C270-90 **Imax: 1467 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G6
Imax 70°	277.8
Imax 80°	14.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**

DIN EN 13032 and DIN 5032


# Photometric test report

<b>Family</b> <b>Floodlight FL21 midi</b>	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> <b>59367_121</b>
--	--	--------------------------------------

Envelope curve in cd/klm

KMK 60°
KMK 57.5°
KMK 55°
KMK 52.5°

**siteco**

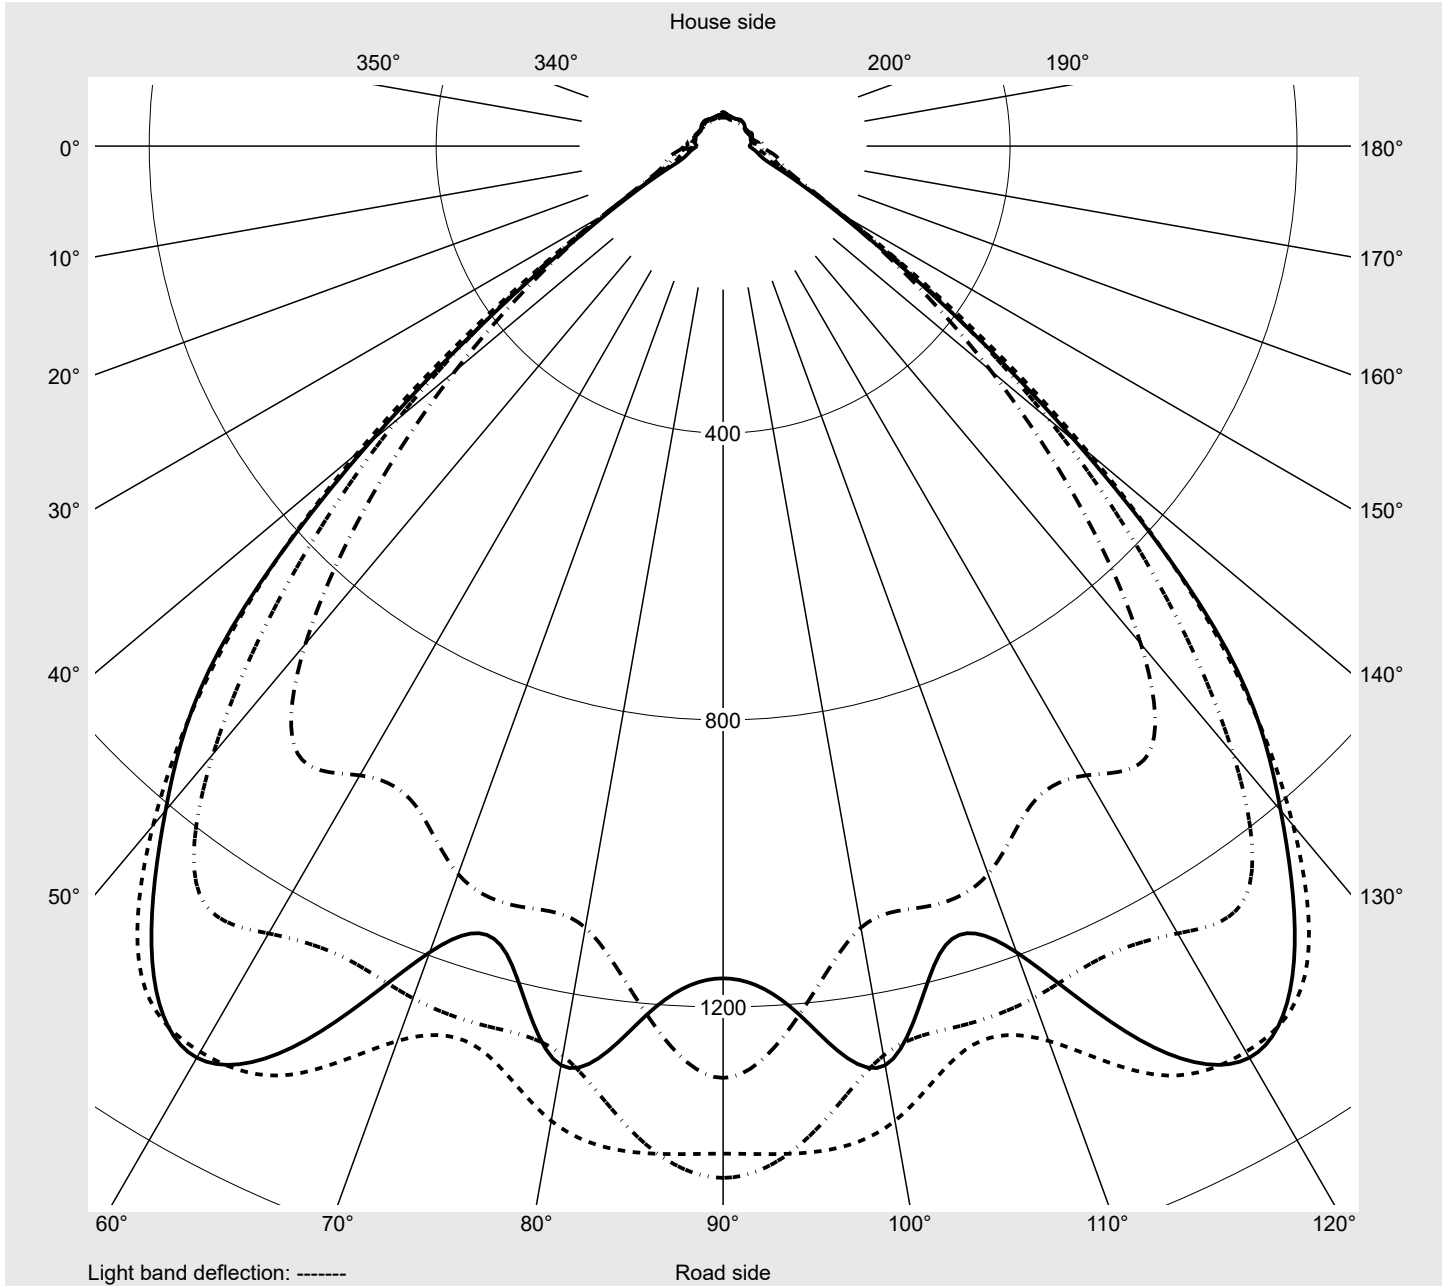

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> 59367_121
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0
2,5°	126.0	127.9	130.1	132.1	134.1	136.1	137.9	139.7	141.4	143.0	144.4	145.7	146.8
5,0°	127.4	131.7	136.0	140.4	144.8	149.1	153.1	157.1	160.7	164.4	168.0	171.1	174.3
7,5°	128.0	134.1	140.1	146.3	152.5	159.1	165.8	172.9	179.9	187.1	194.2	201.2	207.6
10,0°	128.3	135.8	143.6	152.1	161.4	171.8	182.2	193.1	204.0	215.3	225.7	234.5	241.7
12,5°	128.5	137.9	148.6	159.9	172.1	184.7	196.8	209.7	221.9	232.6	241.8	249.2	255.7
15,0°	129.3	140.4	152.8	165.7	178.4	191.1	204.7	218.1	229.6	239.3	247.6	255.9	264.0
17,5°	129.6	141.7	154.8	168.3	181.5	196.0	210.7	224.7	236.5	246.6	257.9	270.3	282.9
20,0°	127.9	141.3	154.8	168.8	183.7	200.6	218.1	234.3	247.7	260.6	277.3	294.2	310.4
22,5°	123.9	138.6	153.7	168.5	185.5	205.4	226.0	242.9	256.9	273.0	294.9	313.1	326.9
25,0°	122.1	134.7	150.3	167.5	186.2	206.8	229.2	247.0	259.9	278.5	301.2	319.1	335.9
27,5°	120.1	131.0	144.2	164.5	184.3	205.2	227.9	248.2	263.1	284.0	309.2	333.6	354.0
30,0°	116.8	126.8	138.2	159.8	181.0	201.7	227.1	254.8	276.1	301.4	331.2	361.6	381.1
32,5°	111.9	122.6	132.7	154.8	177.0	199.1	229.2	262.8	290.9	318.8	353.4	386.1	404.7
35,0°	106.5	117.5	127.8	149.1	171.1	196.3	231.1	266.8	298.5	327.4	365.0	397.2	419.7
37,5°	100.0	109.6	122.0	141.5	164.5	191.8	231.8	265.0	294.0	323.6	358.1	388.6	410.5
40,0°	92.0	99.5	113.7	132.0	155.8	187.3	230.3	261.2	286.1	316.8	354.9	378.6	399.2
42,5°	83.8	90.5	105.1	122.6	145.8	182.4	231.4	262.2	290.4	333.3	375.7	396.6	416.4
45,0°	76.1	82.7	98.5	116.9	139.3	179.2	232.4	267.7	314.3	379.3	438.6	470.3	485.1
47,5°	69.6	76.1	92.0	108.2	127.7	164.2	218.9	269.7	343.7	433.4	529.7	582.5	588.3
50,0°	62.8	66.1	79.0	91.5	104.4	135.5	193.9	273.2	390.2	530.5	686.4	778.0	766.7
52,5°	54.9	60.6	73.3	82.7	93.1	123.2	190.5	310.9	487.2	696.5	905.7	1034.0	1012.9
55,0°	49.5	54.9	67.0	74.4	85.9	117.3	194.4	353.9	591.4	853.5	1106.0	1272.6	1267.3
57,5°	43.2	47.6	57.7	64.6	77.2	111.2	194.4	371.2	665.6	982.8	1236.4	1413.2	1457.8
60,0°	37.0	41.4	47.5	54.3	69.4	108.2	182.7	341.5	643.7	992.8	1209.2	1387.4	1467.3
62,5°	32.5	35.5	39.7	46.4	59.9	95.3	152.5	268.8	504.3	807.0	995.2	1183.6	1229.3
65,0°	27.8	30.4	34.1	40.3	49.2	70.3	109.4	182.8	335.2	551.3	733.1	891.2	858.8
67,5°	21.9	23.1	27.5	33.2	40.6	51.3	71.7	110.4	192.7	322.0	465.3	546.3	495.6
70,0°	18.7	18.6	20.7	27.7	34.9	41.4	52.4	67.9	101.2	159.2	236.5	277.8	230.1
72,5°	15.2	15.6	16.6	21.8	27.3	31.8	36.7	42.5	53.1	70.9	90.4	103.5	89.8
75,0°	12.5	12.9	13.3	16.0	19.3	21.6	24.1	25.0	28.7	32.9	37.6	42.2	37.5
77,5°	9.8	10.5	10.7	12.0	13.5	14.3	14.9	15.1	16.5	18.1	20.2	21.8	20.5
80,0°	8.0	7.6	7.9	9.3	8.8	8.9	8.7	8.9	9.8	10.1	11.6	11.9	11.3
82,5°	6.5	5.4	5.0	5.9	5.5	5.1	4.7	4.9	5.1	5.4	5.9	6.0	5.6
85,0°	3.4	2.7	2.3	2.3	2.2	2.1	2.1	2.1	2.0	2.2	2.4	2.4	2.4
87,5°	0.7	0.7	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> 59367_121
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0
2,5°	147.8	148.4	149.1	149.6	150.1	154.8	124.2	122.3	120.5	118.7	117.1	115.5	114.0
5,0°	177.0	179.3	181.1	182.6	183.6	182.6	123.4	119.5	115.8	112.5	109.3	106.5	103.8
7,5°	213.0	217.2	220.6	223.3	225.4	227.0	122.3	116.9	111.7	107.0	102.7	98.9	95.4
10,0°	247.4	251.8	255.1	257.4	258.9	259.2	121.3	114.5	107.9	102.1	96.7	92.0	88.2
12,5°	260.9	264.6	267.3	269.2	270.7	272.3	119.9	111.7	104.1	97.3	91.3	86.4	82.3
15,0°	270.6	276.4	281.6	286.3	289.7	289.5	118.9	109.0	100.6	92.9	85.9	79.7	75.0
17,5°	295.4	307.1	316.9	324.7	330.4	337.6	117.8	105.6	94.7	86.8	80.0	74.2	69.7
20,0°	324.9	335.8	344.5	351.4	357.6	359.7	113.4	101.0	90.6	82.3	74.6	69.3	65.7
22,5°	341.3	354.9	363.5	369.0	373.3	376.6	110.4	97.3	85.9	76.7	70.1	65.1	60.6
25,0°	355.5	373.0	378.7	378.9	379.2	379.8	107.0	92.6	81.7	73.0	66.5	60.4	55.6
27,5°	372.0	389.5	398.2	397.8	393.7	394.0	102.1	87.2	77.5	69.6	62.5	56.2	53.3
30,0°	395.3	409.5	416.1	413.2	409.9	408.8	97.0	82.9	73.3	66.1	58.0	54.0	51.3
32,5°	419.4	428.6	427.7	421.3	419.0	422.0	92.4	78.8	69.3	61.3	55.6	52.3	49.9
35,0°	441.8	438.1	432.5	424.5	420.4	420.8	87.2	73.9	65.4	57.5	53.5	50.9	48.6
37,5°	429.1	438.1	427.8	420.9	418.3	420.1	82.3	69.3	59.4	54.0	51.4	49.0	46.3
40,0°	428.8	447.2	448.5	451.8	469.8	475.6	76.9	63.9	54.8	51.1	48.9	47.4	45.1
42,5°	453.4	493.2	516.7	541.5	583.5	629.2	72.0	58.2	51.2	48.6	47.1	45.7	43.8
45,0°	524.4	587.2	632.1	679.0	742.6	774.8	67.9	54.0	48.3	46.5	45.3	43.7	42.7
47,5°	622.0	701.2	757.2	800.2	893.6	980.7	63.6	50.5	45.8	44.4	43.8	42.2	41.3
50,0°	785.4	866.2	904.9	931.3	1038.8	1114.2	58.9	47.5	42.8	42.6	42.1	40.8	39.6
52,5°	1014.5	1079.9	1097.3	1106.3	1215.8	1299.0	53.5	45.6	41.6	41.8	41.0	39.5	38.7
55,0°	1248.6	1264.1	1270.2	1287.4	1385.0	1438.3	49.9	44.6	42.2	43.1	43.4	40.6	39.8
57,5°	1428.3	1327.5	1304.2	1379.7	1408.0	1404.5	44.4	42.4	41.6	42.8	41.7	40.6	39.1
60,0°	1375.0	1196.0	1166.0	1301.1	1215.0	1160.1	39.1	39.5	39.7	40.3	39.1	38.2	37.8
62,5°	1067.0	911.0	916.3	978.6	898.4	768.5	33.5	36.1	37.1	36.9	36.7	36.1	36.5
65,0°	696.2	580.9	594.1	585.1	555.5	521.5	29.7	32.7	34.0	33.9	33.3	34.1	35.8
67,5°	381.0	323.8	299.1	240.8	204.0	163.4	26.0	28.0	29.8	29.4	30.4	31.7	34.1
70,0°	171.4	154.0	129.5	82.3	72.3	77.2	20.7	22.1	22.8	24.0	27.6	28.8	30.9
72,5°	70.6	64.7	51.8	39.4	35.7	32.9	16.5	17.7	19.0	20.1	23.9	25.1	26.2
75,0°	33.1	31.3	26.2	22.6	20.4	21.1	13.1	14.3	15.4	16.8	19.8	20.9	21.0
77,5°	19.0	17.7	15.5	14.0	13.0	12.3	10.1	11.3	12.1	13.1	14.8	16.3	15.9
80,0°	10.1	9.6	9.0	8.6	8.2	8.3	7.8	8.3	8.7	9.5	10.8	11.9	12.0
82,5°	5.0	4.9	4.8	4.7	4.7	4.5	6.0	6.4	6.6	6.7	7.6	8.1	8.6
85,0°	2.3	2.3	2.3	2.3	2.3	2.4	3.1	2.9	3.4	3.2	3.2	3.4	3.8
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	0.7	0.8	0.9	1.0	1.0	1.0	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> 59367_121
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	0.2	0.2
2,5°	112.6	111.3	110.1	109.1	108.2	107.4	106.8	106.4	106.0	105.7	105.6	1.5	1.7
5,0°	101.4	99.2	97.3	95.6	94.2	93.0	92.1	91.4	90.8	90.3	90.2	3.2	4.9
7,5°	92.4	89.9	87.8	86.0	84.4	83.2	82.2	81.5	81.0	80.5	80.4	5.0	9.9
10,0°	85.0	82.4	80.3	78.5	76.9	75.6	74.7	74.1	73.8	73.6	73.6	7.0	16.9
12,5°	79.0	76.3	73.9	71.9	70.4	69.4	68.7	68.4	68.3	68.0	67.8	9.0	25.9
15,0°	71.6	68.7	65.9	63.8	62.4	61.2	60.0	59.1	58.7	58.8	59.0	10.8	36.7
17,5°	66.4	63.4	60.8	57.3	55.6	54.9	54.1	53.1	51.8	50.8	50.7	13.0	49.7
20,0°	62.3	57.5	55.0	53.8	53.1	51.9	51.2	50.0	49.5	49.2	49.1	15.3	65.0
22,5°	56.0	53.7	52.3	51.1	50.0	49.3	48.0	47.5	47.4	47.4	47.3	17.5	82.4
25,0°	53.4	51.5	49.8	48.5	47.7	46.2	45.6	45.4	45.5	45.7	46.0	19.4	101.8
27,5°	51.2	49.3	47.3	46.2	44.4	44.0	44.0	44.0	44.4	44.9	45.0	21.5	123.3
30,0°	49.7	47.1	45.7	44.1	43.2	42.8	42.8	43.0	43.3	43.8	44.0	23.8	147.1
32,5°	47.6	46.2	45.0	42.8	42.0	42.0	42.1	42.4	43.0	43.3	44.0	26.1	173.3
35,0°	46.1	45.1	43.5	42.3	41.9	41.8	41.7	42.2	43.0	43.7	43.7	28.1	201.4
37,5°	45.5	44.5	42.8	42.0	41.9	41.9	41.8	41.9	41.9	42.3	42.4	29.2	230.6
40,0°	44.5	43.5	42.3	41.7	41.6	41.4	41.2	41.1	41.4	41.8	41.9	30.9	261.5
42,5°	43.3	42.3	41.1	40.8	40.5	40.4	40.4	40.4	40.6	41.2	41.0	34.7	296.2
45,0°	42.1	41.3	40.0	39.6	39.3	39.3	39.5	39.6	39.9	40.9	40.7	40.9	337.1
47,5°	40.0	39.7	39.6	38.7	38.5	38.3	38.7	38.8	39.4	39.2	42.1	48.3	385.5
50,0°	38.8	38.0	38.6	39.1	38.0	37.8	38.1	37.9	38.8	39.7	39.2	58.1	443.6
52,5°	38.6	38.1	38.5	38.6	38.2	38.2	38.0	37.9	38.9	39.7	39.5	72.5	516.0
55,0°	39.1	39.4	40.2	41.2	40.6	40.0	39.6	40.1	41.6	43.5	44.9	87.3	603.3
57,5°	39.8	41.9	43.1	44.0	43.0	41.9	41.9	42.7	44.3	45.7	47.6	96.4	699.8
60,0°	39.6	41.9	43.3	43.8	42.8	41.8	41.8	42.6	43.6	44.1	44.2	93.2	793.0
62,5°	39.2	42.0	43.8	43.5	42.2	41.5	42.2	42.5	41.3	40.0	39.5	76.3	869.3
65,0°	39.0	42.0	44.0	43.1	42.1	42.4	43.6	42.5	40.5	38.5	39.4	54.2	923.5
67,5°	37.5	40.5	42.2	42.2	42.1	42.9	43.3	41.5	39.3	38.8	38.6	32.2	955.7
70,0°	34.0	37.3	36.0	37.9	39.5	41.1	41.7	39.8	38.6	38.2	37.3	18.0	973.7
72,5°	26.8	27.6	29.6	32.0	34.7	36.6	37.2	35.6	34.1	33.6	31.3	10.1	983.7
75,0°	21.5	22.3	24.2	26.7	29.5	31.7	31.1	27.1	25.2	23.4	22.2	6.3	990.1
77,5°	16.0	15.8	18.0	19.1	22.8	23.5	22.6	20.7	17.5	14.1	12.6	4.3	994.4
80,0°	10.3	10.4	11.8	12.5	13.4	14.1	14.0	12.8	10.7	10.6	10.0	2.8	997.1
82,5°	7.4	7.4	8.2	8.8	8.4	9.5	9.4	8.5	7.8	8.2	8.1	1.8	998.9
85,0°	3.6	3.8	4.0	4.4	4.0	4.0	4.1	4.0	3.6	3.7	3.8	0.8	999.7
87,5°	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	1.9	1.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F2F3A</b> <b>EAN: 4058352854495</b>	<b>LP number</b> 59367_121
---------------------------------------	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	35350	270.2	286.6	278.4
95	241	252	33541	251.6	266.7	259.2
90	229	250	31871	235.3	249.2	242.2
85	216	248	30061	218.2	231.1	224.6
80	203	246	28252	201.9	213.7	207.8
75	190	243	26443	186.3	197.0	191.6
70	178	241	24773	172.3	182.2	177.2
65	165	238	22964	157.7	166.7	162.2
60	152	235	21154	143.6	151.7	147.6
55	140	232	19484	130.9	138.3	134.6
50	127	229	17675	117.4	124.1	120.8
45	114	225	15866	104.2	110.3	107.2
40	102	221	14196	92.4	97.6	95.0
35	89	216	12386	80.0	84.4	82.2
30	76	210	10577	67.9	71.6	69.8
25	63	203	8768	56.2	59.2	57.7
20	51	195	7098	45.8	48.1	47.0
15	38	184	5289	34.7	36.5	35.6
12	31	177	4314	28.8	30.3	29.6