




Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
	Version post-top or side-entry mounting Optic asymmetric, extreme wide distribution with Back Light Control (ST1.0aB) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 3010 lm Power consumption = 22.7 W Luminous efficacy = 132.6 lm/W	serial documentation 28.09.2023





Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 754 cd/klm**

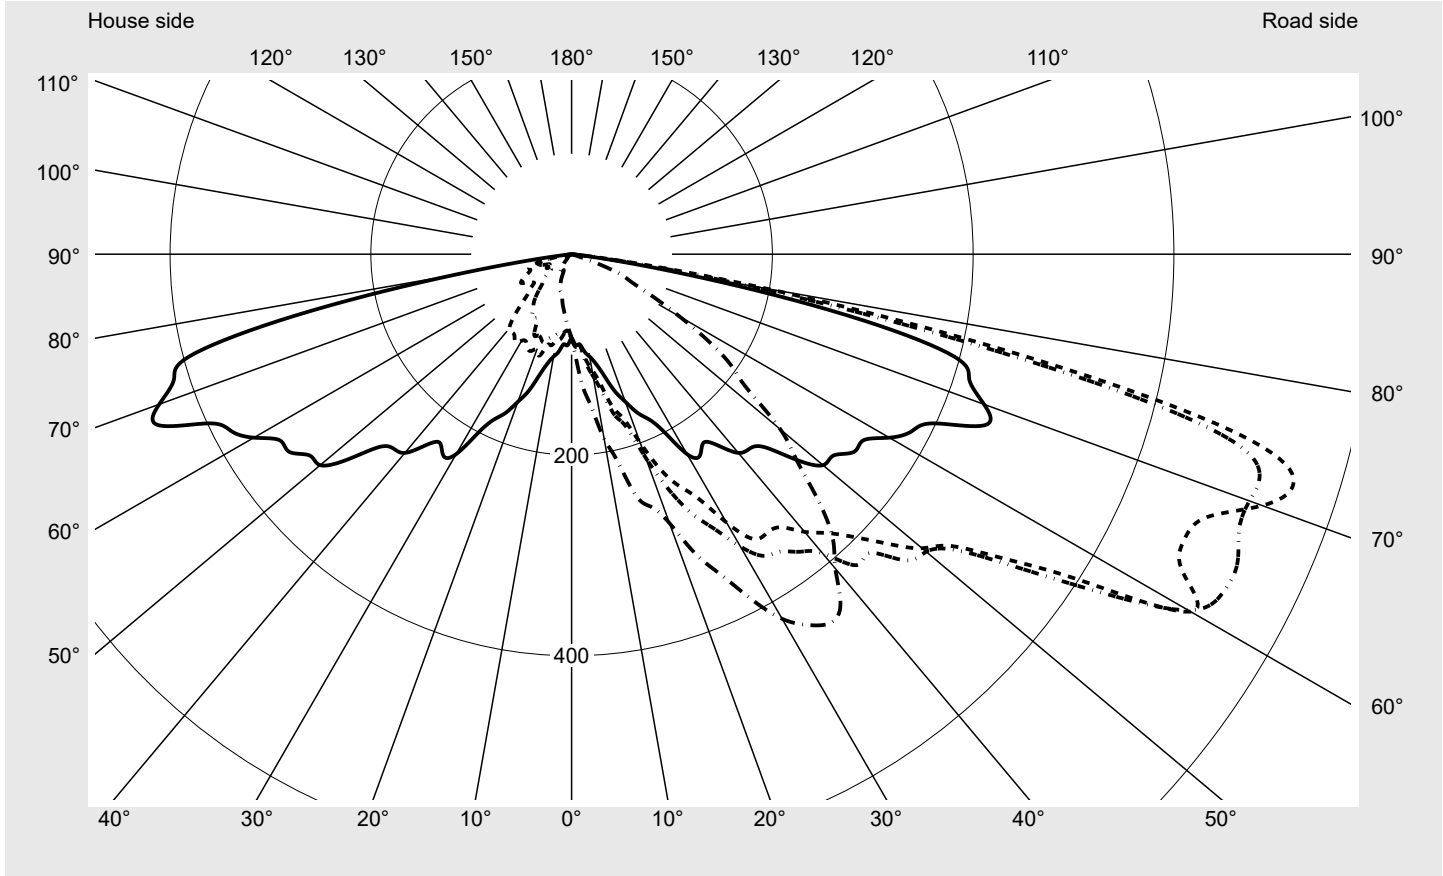


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	742.9
Imax 80°	194.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
--	--	------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

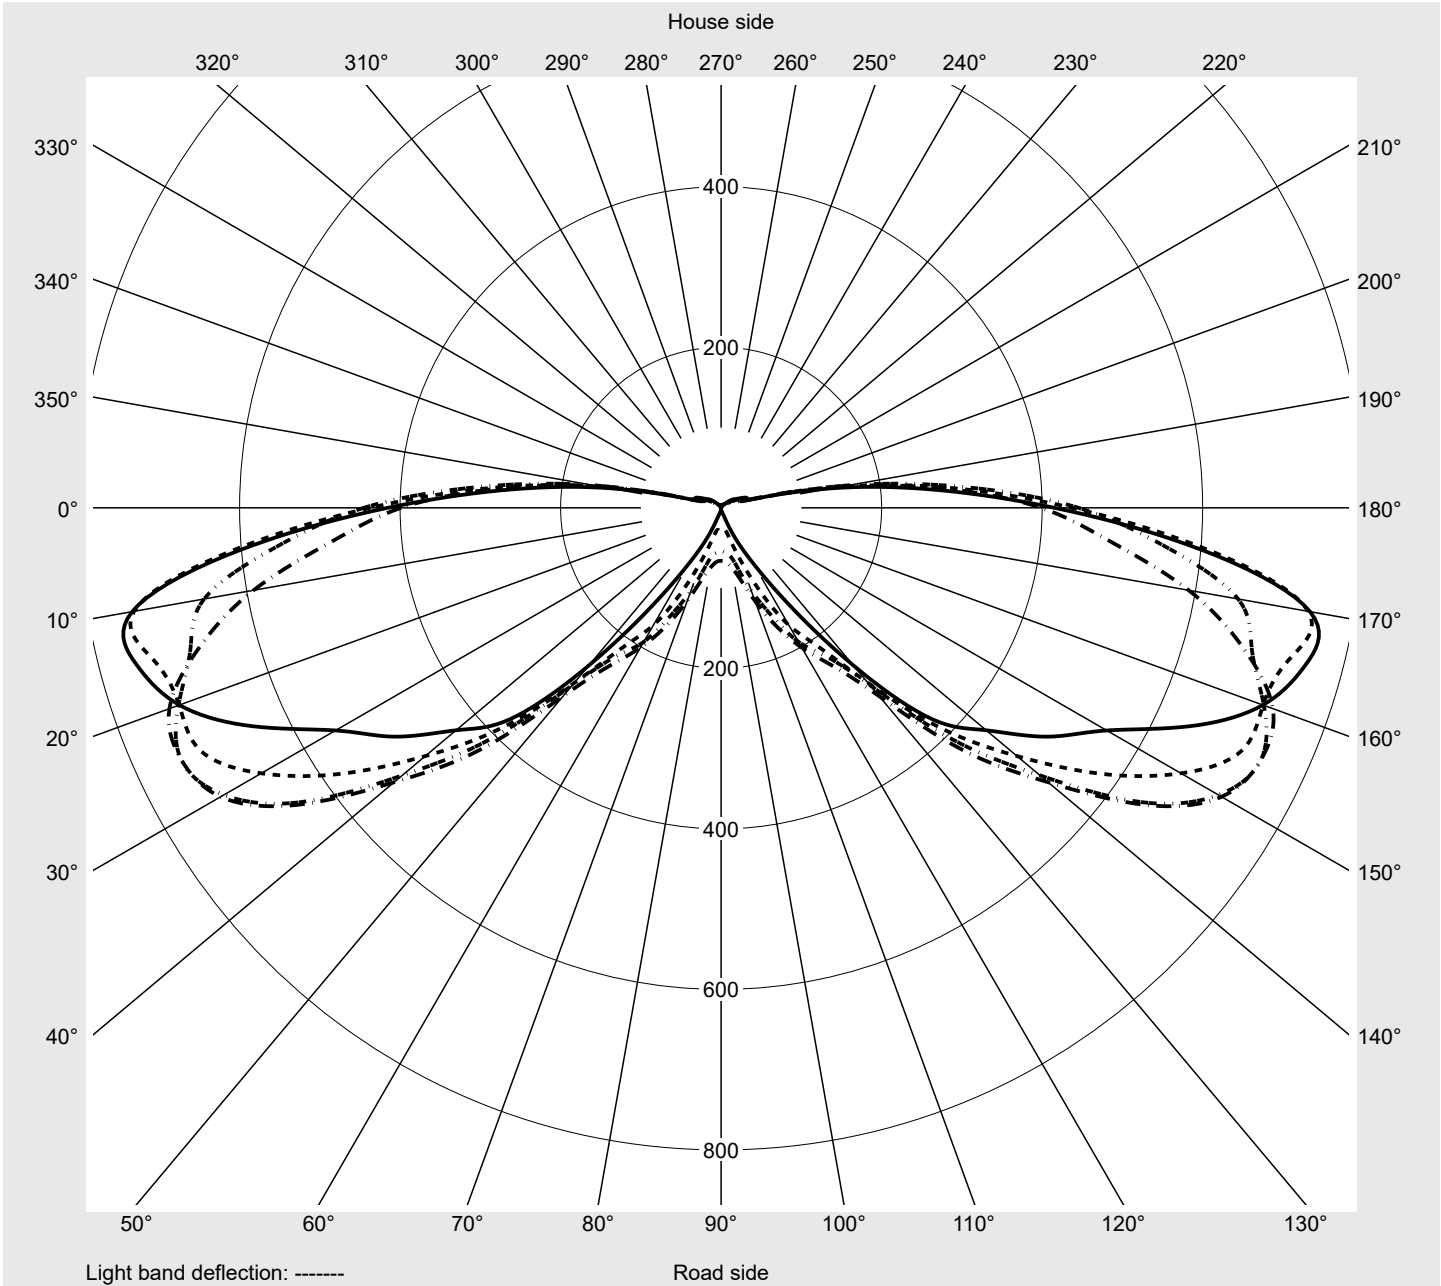

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	90.7	90.4	89.6	89.6	92.6	95.8	96.7	97.7	98.9	99.7	99.4	98.3	98.9
5,0°	90.1	90.9	91.0	90.8	93.4	99.4	105.1	110.0	112.1	113.3	116.6	120.2	123.6
7,5°	97.8	100.7	102.4	105.0	109.4	114.0	119.6	126.7	130.4	132.5	135.6	139.9	145.0
10,0°	103.6	106.4	110.5	116.9	123.4	128.7	132.7	139.3	141.8	143.6	147.6	151.3	157.4
12,5°	111.8	117.3	123.2	132.2	141.1	147.9	152.1	158.1	165.3	172.9	180.1	185.3	193.8
15,0°	125.2	133.6	145.8	157.3	166.0	174.5	179.6	187.6	195.8	203.8	214.1	219.5	222.2
17,5°	143.2	155.5	164.5	171.9	180.0	189.8	197.5	200.1	207.5	218.4	228.9	237.2	238.4
20,0°	156.4	173.2	183.5	200.0	215.7	230.8	239.2	240.9	243.5	246.5	255.5	265.9	271.5
22,5°	170.8	187.0	210.2	232.7	254.6	270.3	278.3	280.9	284.4	287.3	295.1	302.1	306.7
25,0°	181.3	201.9	229.5	255.3	285.9	298.3	297.6	301.1	310.9	320.5	327.1	336.2	345.9
27,5°	199.6	223.0	249.0	275.0	308.8	330.8	334.2	332.9	340.4	347.8	346.0	350.2	361.3
30,0°	229.9	263.1	284.9	308.6	336.3	357.1	363.1	360.8	363.2	367.2	369.3	373.6	377.3
32,5°	237.9	268.2	303.2	336.2	356.3	370.3	380.8	388.7	395.3	396.8	395.5	398.8	401.1
35,0°	229.2	258.8	302.6	339.1	361.7	384.4	397.9	409.4	417.6	415.7	411.6	408.9	410.5
37,5°	240.5	269.2	303.8	342.9	373.6	395.9	415.8	429.1	425.2	416.6	408.2	393.8	398.7
40,0°	258.4	286.2	322.8	361.1	388.8	409.4	426.1	433.8	426.7	417.1	404.6	397.1	398.3
42,5°	262.6	307.8	341.9	376.7	420.2	432.6	432.9	449.5	450.5	420.8	402.7	394.6	390.9
45,0°	271.8	332.1	375.9	398.6	420.7	449.8	466.6	471.6	458.9	428.9	404.4	386.4	378.1
47,5°	302.7	373.9	405.2	426.9	451.5	472.8	491.1	480.4	458.4	436.1	412.4	380.6	357.9
50,0°	327.0	400.8	432.0	455.7	461.1	473.9	487.7	483.4	462.4	434.6	408.1	362.7	325.3
52,5°	329.2	407.3	456.4	477.7	484.5	499.6	505.3	497.0	463.5	423.3	381.5	334.3	311.5
55,0°	343.4	414.5	489.4	530.3	545.3	562.1	551.7	525.4	475.1	419.2	362.9	303.1	278.0
57,5°	344.9	447.4	527.2	608.8	628.7	618.3	599.7	560.8	488.5	413.0	343.5	277.3	248.3
60,0°	365.5	499.4	616.7	712.2	709.4	673.8	648.7	595.7	500.0	408.6	330.9	277.1	243.0
62,5°	382.0	492.2	604.2	686.5	731.0	714.9	688.2	618.4	525.8	415.5	317.6	258.9	222.0
65,0°	398.7	488.0	591.6	673.3	731.6	742.3	720.1	645.3	532.0	427.9	306.2	239.1	201.3
67,5°	445.3	556.0	654.2	684.7	719.6	742.5	715.5	639.3	518.7	408.5	288.1	224.4	192.8
70,0°	437.2	611.3	742.9	732.2	718.6	715.8	661.6	577.7	481.2	388.9	284.8	211.1	168.8
72,5°	415.4	601.1	745.2	754.3	718.3	643.9	554.8	497.1	431.2	372.9	256.3	146.8	79.9
75,0°	395.0	544.9	656.0	682.3	642.3	531.3	429.6	403.8	358.9	245.3	111.8	36.6	10.0
77,5°	280.5	372.5	430.3	442.8	397.4	333.4	289.5	230.9	140.4	47.1	7.8	0.0	0.0
80,0°	118.6	154.3	189.4	194.9	165.3	140.7	101.2	41.4	8.9	0.0	0.0	0.0	0.0
82,5°	22.3	28.1	36.5	41.6	37.9	27.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	98.6	99.1	101.0	101.8	103.4	104.7	86.5	82.9	78.7	76.7	75.0	73.9	74.2
5,0°	124.8	126.6	127.6	127.5	131.0	134.0	86.1	81.9	78.6	77.6	76.4	73.4	71.8
7,5°	147.8	149.0	148.4	151.1	154.5	154.8	94.1	89.6	85.3	81.2	77.6	75.0	71.4
10,0°	165.9	172.0	175.7	184.2	188.3	186.6	98.1	92.3	86.7	81.0	76.7	73.6	68.8
12,5°	202.3	207.5	211.3	213.9	213.7	211.2	104.3	98.4	92.9	85.1	78.2	71.2	63.9
15,0°	225.4	231.4	234.6	245.0	251.8	249.7	113.0	102.9	93.9	86.9	79.3	68.6	59.2
17,5°	239.2	244.6	249.2	255.0	260.6	264.0	129.0	117.8	105.9	92.1	77.5	68.1	58.0
20,0°	275.0	280.6	283.6	284.2	284.2	285.2	138.4	118.6	101.1	89.2	75.4	65.6	58.1
22,5°	310.7	314.2	315.9	318.0	321.4	323.4	151.1	127.7	104.3	87.8	75.3	63.7	53.3
25,0°	341.5	337.6	342.8	348.8	350.3	352.4	160.0	132.2	103.5	88.2	70.6	57.9	50.1
27,5°	374.8	380.5	383.8	387.9	388.0	387.2	175.8	140.1	98.2	74.1	61.4	53.3	44.7
30,0°	379.5	393.7	407.6	411.8	416.2	419.4	184.6	142.5	99.5	73.6	57.7	48.7	38.8
32,5°	401.0	403.5	412.2	426.4	435.0	437.9	193.3	147.6	104.0	73.3	52.0	40.1	35.2
35,0°	419.2	422.4	422.5	435.6	445.7	448.7	186.7	143.1	99.2	66.6	45.2	35.4	29.5
37,5°	415.6	427.1	432.3	432.2	436.8	440.0	190.5	143.1	98.0	62.3	42.1	34.5	27.7
40,0°	400.5	406.3	413.2	412.8	409.8	408.8	203.0	153.5	96.5	55.6	37.1	30.1	23.0
42,5°	402.4	406.8	400.1	383.3	377.8	385.5	209.2	149.2	86.1	47.7	31.6	22.6	19.0
45,0°	383.4	377.9	365.8	363.7	358.0	348.1	205.7	134.1	71.5	41.1	30.5	22.9	20.5
47,5°	353.3	337.4	324.0	320.1	311.0	304.5	216.3	128.3	59.8	39.0	26.5	22.6	19.1
50,0°	320.4	304.1	287.9	281.2	270.4	271.6	232.3	136.7	54.2	32.9	22.4	18.1	14.6
52,5°	296.6	272.2	245.6	233.2	223.2	221.0	232.0	130.6	47.1	26.1	16.7	13.2	11.8
55,0°	263.0	239.0	214.4	195.3	190.2	195.0	233.6	129.2	49.6	25.2	16.6	12.9	10.2
57,5°	227.9	202.7	178.8	161.7	157.9	162.8	233.0	141.0	52.2	21.8	12.8	11.9	9.9
60,0°	196.3	165.8	147.0	132.3	126.4	124.4	242.3	145.8	57.7	27.6	18.5	13.7	11.9
62,5°	173.7	133.9	112.3	100.0	91.8	90.8	260.8	149.2	55.4	27.0	17.3	12.9	11.5
65,0°	162.4	123.5	92.0	75.5	67.7	66.1	276.7	153.3	50.7	24.0	20.2	14.9	10.8
67,5°	147.6	109.8	75.5	60.0	56.1	54.1	300.7	161.7	45.3	26.5	24.0	17.0	11.5
70,0°	114.6	67.0	38.1	28.1	28.5	29.3	285.9	151.3	44.0	31.3	26.4	19.3	14.1
72,5°	41.7	14.3	7.3	4.1	3.4	3.6	262.8	140.2	44.5	34.2	29.4	22.5	18.5
75,0°	1.2	0.0	0.0	0.0	0.0	0.0	249.7	130.7	39.3	34.0	27.6	23.6	19.6
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	174.3	91.4	26.0	27.2	24.0	19.1	12.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	70.5	37.2	13.0	14.3	12.9	6.6	2.7
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.4	6.6	2.7	3.4	2.6	0.6	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	0.1	0.1
2,5°	72.4	71.5	72.1	69.9	70.0	69.5	69.6	71.1	73.1	74.4	73.9	1.0	1.2
5,0°	69.8	67.0	66.8	66.5	65.8	65.0	63.6	63.8	64.7	65.0	65.3	2.2	3.3
7,5°	66.2	63.1	60.9	59.1	58.9	56.8	55.7	57.1	56.9	56.7	57.3	3.6	6.9
10,0°	63.9	60.2	57.2	55.3	51.9	47.8	47.7	48.7	48.0	49.2	50.9	5.0	11.9
12,5°	59.7	54.4	51.3	50.0	47.1	45.9	45.2	43.9	43.5	43.8	43.9	7.0	18.9
15,0°	52.0	47.6	45.9	43.8	44.1	43.2	40.8	40.7	40.5	39.4	39.3	9.3	28.2
17,5°	51.8	47.6	44.0	40.1	37.4	33.6	32.6	33.4	35.0	36.6	37.5	11.4	39.6
20,0°	52.3	46.9	42.0	35.9	33.2	30.6	29.2	29.0	29.7	31.7	32.1	14.3	53.9
22,5°	46.0	43.7	40.1	31.9	28.8	29.6	28.2	25.0	24.4	26.4	27.1	17.8	71.7
25,0°	43.9	40.8	37.1	29.8	26.1	24.8	22.4	19.8	18.8	19.1	18.9	21.1	92.7
27,5°	38.8	35.1	31.2	27.2	24.5	22.4	20.6	20.3	20.3	19.6	18.8	24.7	117.4
30,0°	32.0	30.1	27.9	24.3	23.8	24.5	21.8	19.2	19.4	21.4	22.9	28.5	145.9
32,5°	30.5	27.8	24.4	20.6	19.6	20.3	20.5	18.6	17.3	19.6	21.7	31.9	177.8
35,0°	25.0	23.6	21.5	18.1	17.1	17.2	15.9	15.8	16.6	16.1	15.4	34.6	212.4
37,5°	22.7	21.4	18.8	15.2	14.2	13.9	13.4	15.5	15.9	13.9	13.1	36.8	249.2
40,0°	18.9	17.9	16.1	14.6	14.4	12.2	12.0	14.1	13.7	12.2	11.9	38.8	288.0
42,5°	16.9	14.0	13.4	13.7	12.5	12.1	11.5	11.0	11.5	9.4	8.3	40.9	328.9
45,0°	16.6	13.6	12.4	13.6	14.8	13.9	10.8	9.7	11.1	8.3	6.2	42.7	371.5
47,5°	13.3	12.7	12.5	11.3	11.8	12.1	10.4	9.1	8.4	6.4	5.4	44.2	415.7
50,0°	11.2	9.0	9.4	9.3	9.3	9.6	8.6	8.0	8.3	6.6	4.5	45.0	460.7
52,5°	10.2	9.2	9.9	9.0	7.5	8.3	7.7	8.5	8.3	6.1	5.8	45.4	506.2
55,0°	9.1	8.7	6.8	5.8	5.7	6.1	6.5	6.7	6.2	5.1	4.7	47.1	553.2
57,5°	9.4	8.1	7.1	6.0	4.8	4.7	4.6	5.0	5.2	4.2	2.8	49.2	602.4
60,0°	10.5	7.0	5.8	5.7	5.0	4.9	3.8	4.1	4.0	3.1	2.7	52.7	655.1
62,5°	10.0	6.9	5.5	5.6	4.5	4.2	3.7	2.7	2.1	2.2	2.4	53.3	708.4
65,0°	10.1	7.2	6.2	5.5	3.3	3.6	3.8	2.5	1.6	1.3	1.3	54.2	762.6
67,5°	8.5	7.8	6.4	4.1	2.3	2.2	2.3	2.1	1.3	1.0	1.1	55.5	818.1
70,0°	9.4	7.8	5.7	3.1	2.3	1.5	1.2	1.4	0.9	0.6	0.8	54.6	872.7
72,5°	13.7	8.3	4.8	2.2	1.1	0.4	0.3	0.5	0.4	0.0	0.0	49.9	922.6
75,0°	13.4	5.5	1.9	0.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	41.2	963.8
77,5°	6.3	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	24.9	988.7
80,0°	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.5	998.3
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2N51F08GE EAN: 4058352558515	LP number 59457_80
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3010	22.7	23.4	23.0
95	241	252	2856	21.6	22.2	21.9
90	229	250	2714	20.5	21.0	20.8
85	216	248	2560	19.3	19.9	19.6
80	203	246	2406	18.2	18.7	18.4
75	190	243	2252	17.0	17.5	17.2
70	178	241	2109	15.9	16.4	16.2
65	165	238	1955	14.9	15.2	15.0
60	152	235	1801	13.7	14.0	13.8
55	140	232	1659	12.7	13.0	12.8
50	127	229	1505	11.6	11.8	11.7
45	114	225	1351	10.5	10.8	10.6
40	102	221	1209	9.5	9.8	9.6
35	89	216	1055	8.4	8.6	8.5
30	76	210	901	7.4	7.5	7.4
25	63	203	747	6.3	6.5	6.4
20	51	195	604	5.4	5.5	5.4
18	45	191	533	4.9	5.0	5.0