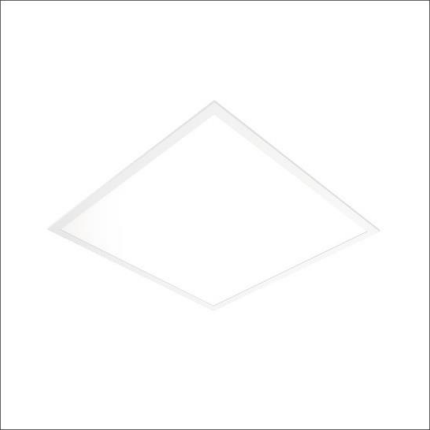

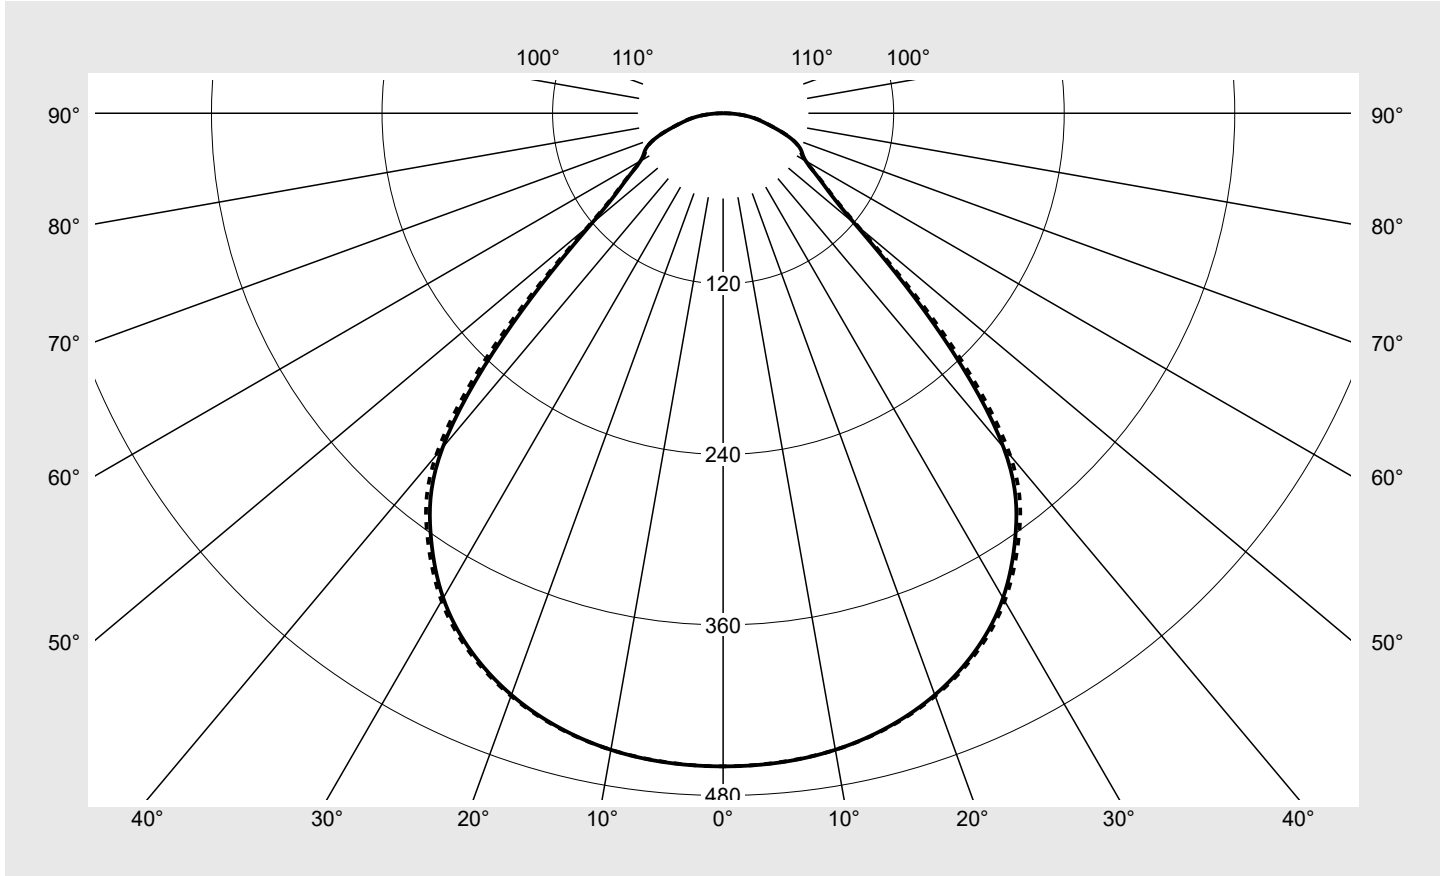


Photometric test report

Family Apollon® 41	Order number: 51MH11W72M43 EAN: 4058352930885	LP number 59525_5
	Version	recessed luminaire for lay-in mounting, square M625, wide distribution, adjustable color temperature: 3000 K 4000 K, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 3000 K CRI ≥ 80
	Controlgear	ECG
	Setting	individual position
	Rated values	Net luminous flux = 3500 lm Power consumption = 28.5 W Luminous efficacy = 122.8 lm/W
		serial documentation 20.12.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 460 cd/klm**



Classifications	
DIN 5040	A 5 0
CIE	N1=61 N2=87 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Apollon® 41	Order number: 51MH11W72M43 EAN: 4058352930885	LP number 59525_5
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	459.5	459.5	459.5	459.5	459.5	459.5	459.5	2.7	2.7
5°	458.5	458.6	458.6	458.5	458.4	458.4	458.3	21.9	24.7
10°	454.8	454.7	454.7	454.6	454.5	454.6	454.8	43.3	67.9
15°	447.3	447.2	447.2	447.1	447.1	447.4	447.7	63.4	131.4
20°	435.5	435.6	435.6	435.5	435.4	435.9	436.3	81.7	213.1
25°	418.3	418.2	418.1	417.9	417.9	418.8	419.8	96.9	310.0
30°	393.9	392.9	392.0	391.8	391.7	394.0	396.2	107.7	417.6
35°	359.0	358.1	357.3	357.0	356.7	359.8	362.9	112.7	530.3
40°	307.0	305.1	303.5	302.7	302.0	308.1	314.2	107.6	637.9
45°	209.9	219.5	229.2	228.5	227.9	223.6	219.4	86.8	724.7
50°	121.1	152.8	184.6	184.6	184.5	154.4	124.3	68.8	793.5
55°	85.1	114.1	143.1	142.6	142.1	114.1	86.2	55.5	849.0
60°	67.2	85.5	103.9	103.9	103.9	85.2	66.6	43.5	892.4
65°	60.3	67.1	74.0	73.7	73.5	66.6	59.7	34.4	926.8
70°	49.9	54.2	58.5	57.8	57.2	53.7	50.2	28.4	955.2
75°	35.1	40.7	46.3	45.7	45.1	40.2	35.4	22.4	977.6
80°	24.2	25.1	26.1	25.6	25.0	24.9	24.7	13.6	991.2
85°	13.0	14.1	15.3	15.2	15.1	14.0	12.9	7.9	999.1
90°	1.4	1.6	1.9	1.8	1.8	1.5	1.2	0.9	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Apollon® 41	Order number: 51MH11W72M43 EAN: 4058352930885	LP number 59525_5
------------------------------	----------------------------------------------------------------	-----------------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.8	16.4	15.2	16.7	17.0	14.8	16.4	15.2	16.7	17.0
	3H	15.7	17.1	16.1	17.5	17.8	15.7	17.1	16.1	17.5	17.8
	4H	16.2	17.5	16.6	17.9	18.2	16.2	17.5	16.6	17.9	18.2
	6H	16.6	17.8	17.0	18.2	18.5	16.6	17.8	17.0	18.2	18.6
	8H	16.8	17.9	17.2	18.3	18.7	16.8	17.9	17.2	18.3	18.7
	12H	16.9	18.0	17.4	18.4	18.8	17.0	18.0	17.4	18.4	18.8
4H	2H	15.4	16.7	15.8	17.0	17.4	15.4	16.7	15.8	17.0	17.4
	3H	16.6	17.7	17.0	18.1	18.5	16.6	17.7	17.0	18.0	18.5
	4H	17.2	18.2	17.7	18.6	19.0	17.2	18.2	17.6	18.6	19.0
	6H	17.7	18.6	18.2	19.0	19.5	17.7	18.6	18.2	19.0	19.4
	8H	18.0	18.7	18.4	19.2	19.7	17.9	18.7	18.4	19.2	19.6
	12H	18.2	18.8	18.7	19.3	19.8	18.1	18.8	18.6	19.3	19.8
8H	4H	17.6	18.3	18.0	18.8	19.3	17.5	18.3	18.0	18.8	19.2
	6H	18.2	18.9	18.7	19.3	19.8	18.2	18.8	18.7	19.3	19.8
	8H	18.5	19.1	19.0	19.6	20.1	18.5	19.1	19.0	19.5	20.1
	12H	18.8	19.3	19.3	19.8	20.3	18.8	19.3	19.3	19.8	20.3
12H	4H	17.6	18.3	18.1	18.7	19.2	17.6	18.3	18.1	18.7	19.2
	6H	18.3	18.8	18.8	19.3	19.9	18.3	18.8	18.8	19.3	19.8
	8H	18.7	19.1	19.2	19.6	20.2	18.6	19.1	19.1	19.6	20.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 555 B = 555
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		3373.2	3527.9	3682.6	3672.3	3662.0	3593.7	3525.5	
50°		2139.9	2701.9	3263.9	3263.0	3262.1	2729.8	2197.5	
55°		1684.9	2259.6	2834.3	2824.5	2814.7	2260.8	1706.8	
60°		1526.5	1943.5	2360.5	2360.5	2360.5	1936.8	1513.0	
65°		1621.2	1804.8	1988.4	1982.7	1977.0	1791.1	1605.3	
70°		1656.5	1799.7	1942.9	1921.1	1899.3	1782.8	1666.4	
75°		1541.8	1788.1	2034.3	2006.8	1979.2	1766.2	1553.1	
80°		1580.3	1643.0	1705.6	1672.1	1638.4	1628.7	1619.1	
85°		1691.5	1843.3	1995.2	1983.6	1972.0	1829.1	1686.2	

Photometric test report

Family Apollon® 41	Order number: 51MH11W72M43 EAN: 4058352930885	LP number 59525_5
-------------------------------------	----------------------------------------------------------------	------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

