




# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> <b>59540_24</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up <b>Optic</b> asymmetric, extremely wide distribution (P0.5a G) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 21180 lm Power consumption = 136.6 W Luminous efficacy = 155.1 lm/W	<b>serial documentation</b> <b>18.01.2024</b>





**Luminous intensity in cd/klm** C180-0 C200-20 C205-25 C270-90 **Imax: 308 cd/klm**

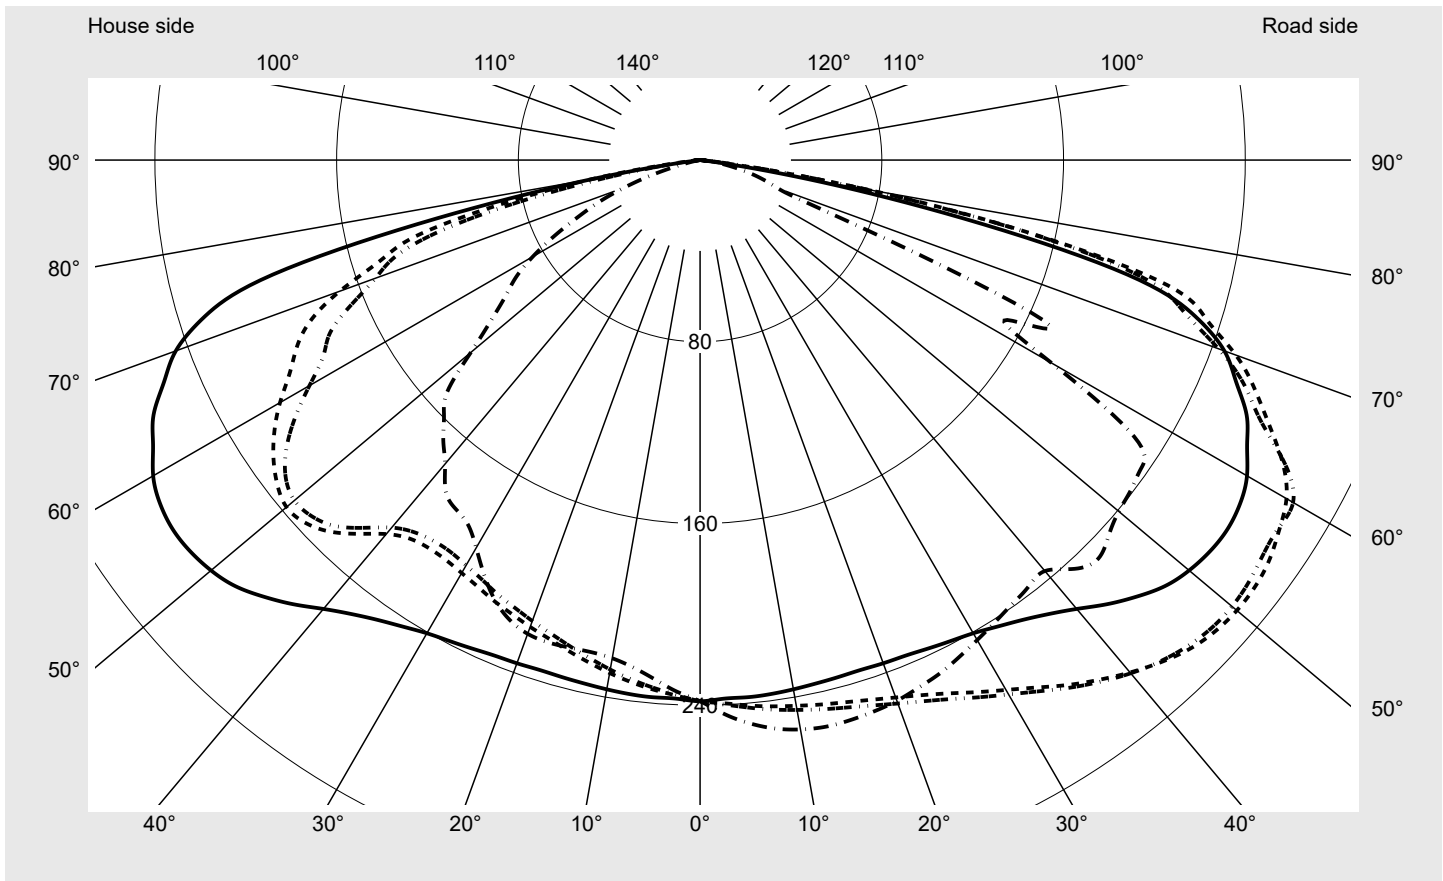

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	256.5
Imax 80°	74.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> 59540_24
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 50°**    **KMK 47.5°**    **KMK 45°**    **KMK 42.5°**      **siteco**

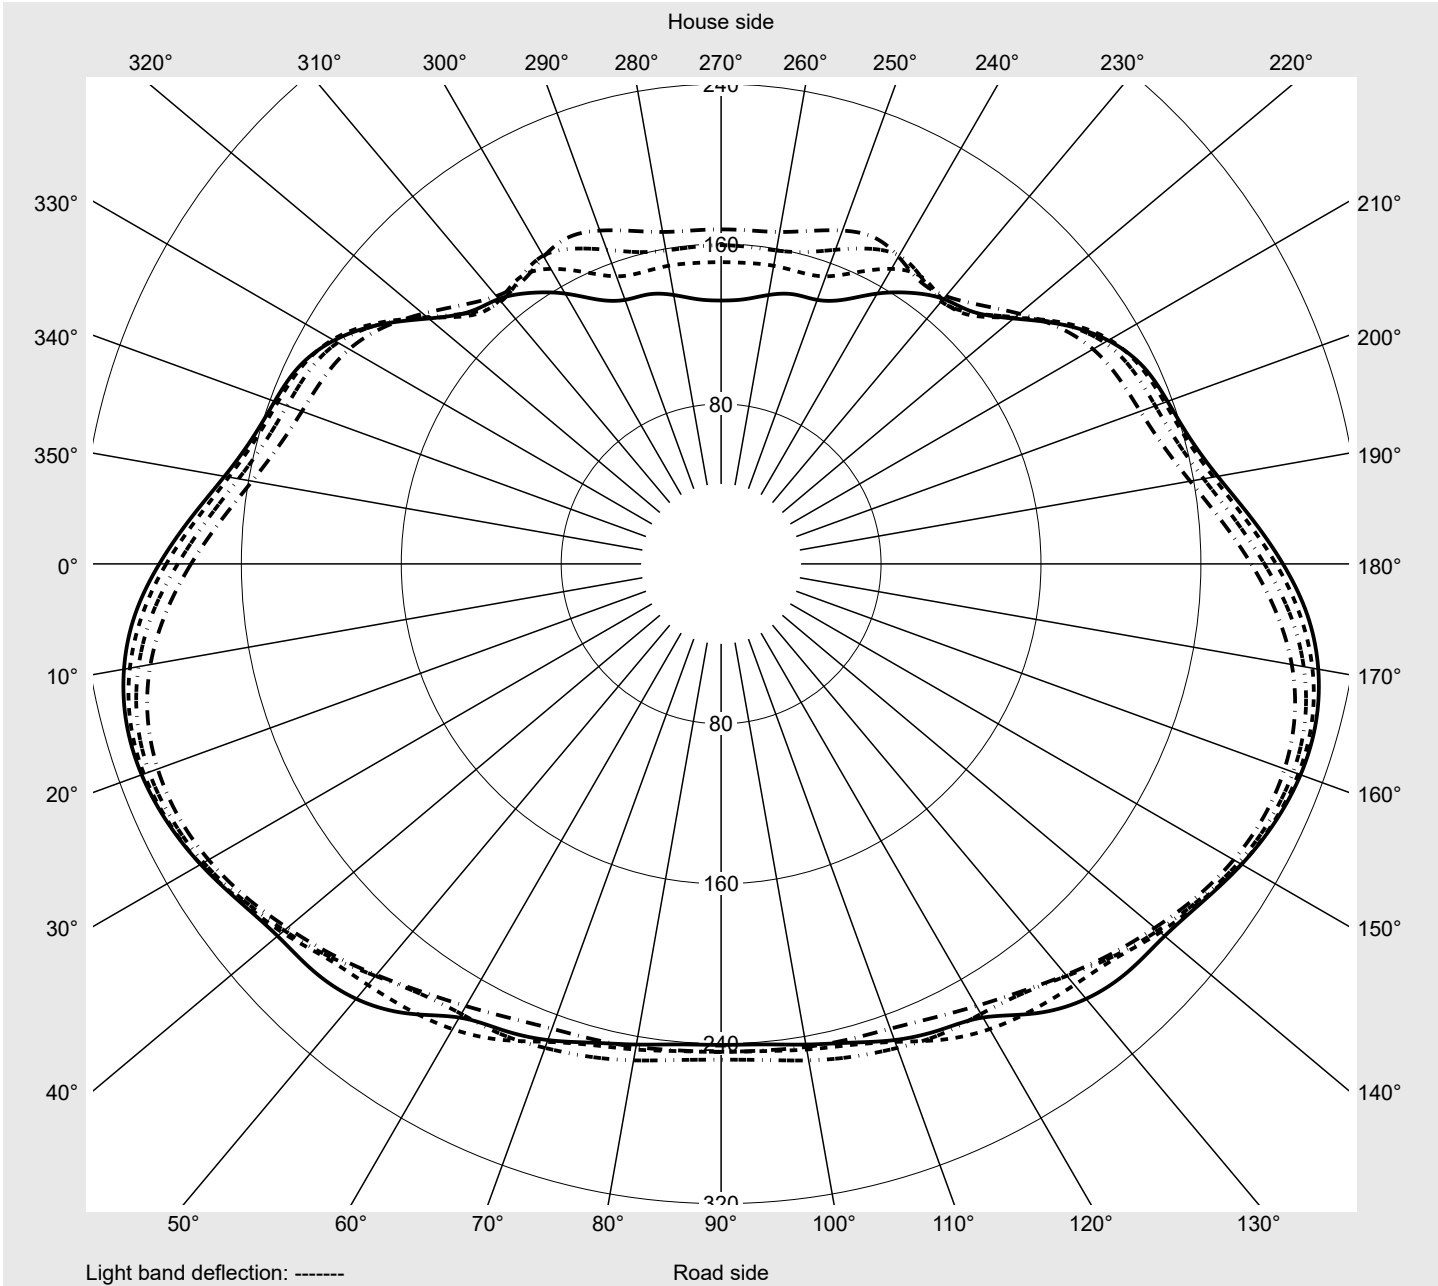

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> <b>59540_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	237.3	237.5	238.1	238.8	239.3	239.9	240.2	240.7	241.5	241.7	242.0	242.5	242.9
5,0°	237.4	238.0	238.8	239.9	241.0	241.9	242.7	243.5	244.6	245.2	245.8	246.5	247.1
7,5°	237.1	238.2	239.5	241.0	242.5	244.0	245.1	246.2	247.5	248.4	249.3	250.0	250.6
10,0°	236.6	238.2	239.9	241.9	243.9	245.8	247.4	248.6	250.0	251.1	252.0	252.6	253.2
12,5°	236.0	238.3	240.4	243.0	245.5	247.6	249.4	250.9	252.2	253.3	254.1	254.7	255.0
15,0°	235.6	238.5	241.1	244.2	247.1	249.5	251.5	253.1	254.1	255.1	255.8	256.2	256.2
17,5°	235.3	239.0	242.1	245.7	249.2	251.8	253.9	255.5	256.4	257.0	257.4	257.2	256.9
20,0°	235.7	240.1	243.9	248.0	251.8	254.6	256.7	258.1	258.5	258.7	258.6	258.0	257.4
22,5°	236.2	241.5	246.0	250.8	255.0	257.8	259.6	260.5	260.4	260.0	259.4	258.4	257.3
25,0°	237.3	243.5	248.9	254.5	259.0	261.8	262.9	262.9	262.2	261.3	260.2	258.6	257.0
27,5°	238.7	246.0	252.9	259.4	264.0	266.6	267.1	266.4	264.7	262.7	260.7	258.6	256.6
30,0°	240.5	249.4	257.8	264.7	269.3	271.6	271.4	269.9	267.6	264.6	261.5	258.8	256.5
32,5°	243.5	253.9	263.5	270.7	275.3	277.3	276.5	274.3	270.9	266.8	262.8	259.6	256.7
35,0°	247.2	259.5	270.1	277.6	282.1	283.6	282.1	279.0	274.6	269.3	264.8	260.4	256.5
37,5°	251.9	265.3	276.5	284.1	288.4	289.4	287.5	283.6	277.9	271.9	266.1	260.9	256.4
40,0°	257.9	272.0	283.3	290.8	294.5	294.9	292.3	287.5	280.9	274.1	267.3	261.3	255.9
42,5°	265.2	278.8	289.9	297.0	299.9	299.5	296.1	290.4	283.2	275.9	268.4	261.2	255.4
45,0°	271.8	285.6	295.9	302.4	304.5	303.0	298.9	292.4	285.3	277.6	269.0	262.5	260.0
47,5°	277.6	290.6	300.3	305.9	307.3	305.1	300.6	293.5	286.7	279.0	274.9	272.2	268.7
50,0°	281.0	294.4	303.3	308.0	308.5	305.7	300.6	294.3	289.6	288.2	284.0	274.4	262.0
52,5°	282.9	296.1	304.6	308.3	308.1	304.7	299.6	297.0	297.9	293.2	280.2	268.9	260.6
55,0°	283.4	296.4	304.5	307.4	306.1	302.7	301.1	302.7	299.0	287.3	277.3	263.0	250.2
57,5°	281.8	294.2	302.3	304.6	302.4	301.8	305.3	302.8	291.1	282.3	265.6	251.7	240.8
60,0°	278.0	289.6	297.4	299.9	298.1	301.4	306.7	298.1	285.4	267.5	252.7	240.4	231.1
62,5°	271.5	282.8	289.9	292.5	289.2	290.5	292.2	289.3	274.8	251.5	238.4	226.6	217.3
65,0°	265.5	275.5	281.2	283.0	276.6	272.6	272.7	269.1	253.6	232.0	217.9	208.5	203.1
67,5°	255.5	265.6	270.2	271.0	264.5	259.5	258.9	247.4	230.6	208.1	193.8	187.1	185.3
70,0°	245.6	253.4	256.5	255.8	251.0	242.8	232.3	218.1	200.6	183.2	168.1	164.4	158.1
72,5°	228.5	234.6	236.2	235.1	233.9	223.7	206.6	186.8	169.6	156.3	143.4	138.9	120.8
75,0°	194.7	195.1	199.0	209.9	213.2	203.6	180.2	156.3	139.6	128.8	118.9	109.7	86.9
77,5°	118.9	121.4	127.9	140.9	149.5	148.0	139.4	124.1	109.0	97.7	88.2	79.3	61.2
80,0°	48.4	49.8	59.9	70.1	74.5	72.8	73.8	68.2	62.2	64.4	61.2	53.2	40.3
82,5°	5.9	5.6	6.9	11.1	15.0	19.9	24.6	26.8	29.1	29.4	28.1	28.6	21.9
85,0°	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.8	5.0	6.4	7.9	7.6	6.5
87,5°	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> <b>59540_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	243.1	243.3	243.5	243.7	244.0	244.1	237.0	236.3	236.1	236.0	235.7	235.4	235.1
5,0°	247.5	247.7	248.2	248.5	248.7	248.9	236.4	235.2	234.6	234.0	233.2	232.7	232.1
7,5°	251.1	251.3	251.7	252.1	252.3	252.4	235.6	234.0	232.8	231.8	230.6	229.8	228.8
10,0°	253.6	253.7	254.0	254.3	254.5	254.5	234.4	232.3	230.7	229.3	227.7	226.4	225.4
12,5°	255.2	255.1	255.2	255.4	255.5	255.5	233.2	230.5	228.3	226.5	224.5	223.1	222.0
15,0°	256.0	255.7	255.5	255.5	255.3	255.2	232.0	228.8	226.1	223.7	221.5	220.0	218.8
17,5°	256.4	255.7	255.2	254.9	254.6	254.5	231.1	227.2	224.0	221.0	218.5	216.8	215.8
20,0°	256.4	255.4	254.5	253.9	253.5	253.3	230.6	226.1	222.2	218.7	215.9	214.1	213.2
22,5°	256.1	254.8	253.4	252.3	251.7	251.4	230.4	225.2	220.5	216.3	213.3	211.4	210.7
25,0°	255.5	253.9	252.2	250.6	249.8	249.4	230.5	224.3	218.9	214.2	210.9	208.9	208.1
27,5°	254.6	252.6	250.7	248.6	247.2	246.8	230.6	223.7	217.2	211.8	208.1	206.1	205.4
30,0°	254.1	251.5	248.9	246.5	244.5	244.0	231.7	223.3	215.8	209.9	206.0	203.9	203.6
32,5°	253.8	250.5	247.2	244.2	242.0	241.4	233.2	223.4	215.0	208.6	204.5	202.8	202.8
35,0°	253.1	249.3	245.3	242.1	239.8	239.0	235.9	224.7	215.1	208.4	204.6	203.2	203.1
37,5°	252.2	248.0	243.9	240.6	237.9	237.1	239.1	226.9	216.7	210.0	206.5	204.9	203.8
40,0°	251.1	246.5	242.5	239.3	236.9	236.2	244.5	231.5	221.4	214.9	211.2	208.5	204.5
42,5°	250.6	247.4	246.2	245.4	244.3	244.1	251.0	238.3	228.9	223.2	219.6	214.8	206.2
45,0°	259.7	257.6	255.2	252.2	249.1	248.0	257.8	245.1	236.2	231.1	227.7	221.4	208.7
47,5°	262.6	254.5	249.2	246.7	244.6	244.1	262.9	250.1	241.1	236.1	232.0	224.4	210.0
50,0°	257.5	253.5	248.0	244.1	241.3	240.6	266.1	252.3	242.8	237.7	233.1	223.6	208.6
52,5°	251.2	244.9	242.1	240.7	239.3	238.9	266.9	251.8	241.0	234.6	229.9	219.4	203.8
55,0°	243.2	238.5	237.3	237.6	236.9	236.9	267.2	250.9	238.0	229.3	222.4	210.0	194.8
57,5°	234.8	231.1	231.4	231.5	228.4	226.6	265.9	248.8	234.0	222.2	211.5	194.5	178.5
60,0°	224.0	222.1	219.2	203.5	185.6	178.7	262.4	244.0	227.9	213.5	198.5	177.2	155.0
62,5°	211.1	203.0	179.8	157.1	151.1	152.4	255.7	235.9	219.2	203.8	187.0	161.9	138.0
65,0°	192.2	167.0	147.6	160.8	169.6	166.4	248.1	226.8	210.5	196.1	179.7	152.0	125.4
67,5°	160.4	132.9	139.7	112.6	79.6	70.0	238.5	217.0	201.7	186.0	166.0	137.5	102.2
70,0°	124.2	113.5	80.1	43.1	37.5	36.7	228.2	207.7	189.6	168.8	152.1	121.0	79.1
72,5°	94.2	70.4	34.4	31.3	30.3	30.0	213.8	196.5	166.3	147.8	140.2	97.8	60.8
75,0°	68.8	33.0	24.9	24.6	23.8	23.5	185.0	166.1	133.3	129.6	114.8	74.9	40.4
77,5°	42.1	18.9	17.8	17.5	16.7	16.4	125.5	104.8	84.8	89.9	72.8	40.0	22.4
80,0°	20.7	11.7	11.4	10.9	10.4	10.2	49.6	44.0	43.6	48.4	32.4	14.5	12.4
82,5°	9.2	6.5	6.2	6.1	5.7	5.6	6.8	6.4	10.9	13.5	8.3	5.6	5.7
85,0°	2.9	2.5	2.5	2.4	2.3	2.2	2.4	2.4	2.4	2.4	2.3	2.2	2.1
87,5°	0.9	0.8	0.9	0.8	0.8	0.8	1.3	1.3	1.3	1.3	1.3	1.3	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> 59540_24
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	0.4	0.4
2,5°	234.8	234.7	234.6	234.3	234.3	234.4	234.5	234.3	234.3	234.2	234.2	2.8	3.2
5,0°	231.3	231.0	230.6	230.1	229.9	229.8	229.7	229.6	229.4	229.4	229.4	5.7	8.9
7,5°	227.9	227.2	226.7	226.2	225.8	225.7	225.5	225.3	225.2	225.3	225.3	8.5	17.4
10,0°	224.2	223.7	223.2	222.7	222.5	222.5	222.4	222.4	222.5	222.6	222.7	11.3	28.7
12,5°	220.9	220.4	220.2	220.2	220.3	220.5	220.8	221.1	221.4	221.7	221.9	14.1	42.8
15,0°	218.0	217.8	218.1	218.5	219.1	219.7	220.3	220.9	221.6	222.0	222.2	16.8	59.6
17,5°	215.5	215.7	216.3	217.2	218.2	219.2	220.1	221.0	221.9	222.4	222.6	19.5	79.1
20,0°	213.3	213.9	214.9	216.1	217.4	218.4	219.3	220.3	221.1	221.7	221.9	22.2	101.2
22,5°	211.0	211.7	213.0	214.3	215.5	216.4	217.1	217.7	218.3	218.9	219.1	24.7	125.9
25,0°	208.4	209.5	210.8	212.0	212.8	213.1	213.1	213.0	213.1	213.4	213.7	27.2	153.2
27,5°	206.1	207.2	208.3	208.7	208.3	207.6	206.7	206.2	205.8	205.7	205.9	29.6	182.8
30,0°	204.5	205.4	205.3	204.4	202.8	200.8	199.0	197.7	197.2	196.9	197.1	31.9	214.7
32,5°	203.4	203.2	201.5	198.8	195.6	192.4	190.2	189.2	189.2	189.8	190.2	34.2	248.8
35,0°	202.5	199.9	195.9	191.3	186.9	183.7	183.2	184.2	185.8	187.0	187.5	36.4	285.3
37,5°	200.6	195.5	189.2	183.4	179.5	178.6	181.2	183.8	184.5	184.1	183.9	38.8	324.0
40,0°	198.0	189.6	181.5	176.2	175.6	179.2	182.3	180.9	177.6	175.3	174.7	41.1	365.1
42,5°	194.7	183.2	174.9	172.9	177.5	180.3	177.4	172.5	168.6	167.4	167.3	43.5	408.6
45,0°	192.0	177.6	171.3	174.8	178.0	174.0	167.2	161.5	159.2	159.1	159.4	45.9	454.5
47,5°	191.5	176.0	172.4	175.1	170.4	161.0	153.1	151.1	151.4	151.1	150.9	47.9	502.4
50,0°	191.0	178.3	173.0	165.5	156.1	145.9	140.5	139.6	136.6	132.9	131.7	49.3	551.6
52,5°	188.5	178.4	165.3	151.1	137.1	128.7	128.3	125.6	119.8	116.5	116.0	50.0	601.7
55,0°	180.5	166.4	147.4	130.9	119.3	117.7	116.1	110.0	105.8	104.4	104.7	50.3	651.9
57,5°	160.7	141.9	126.3	112.6	107.9	108.0	101.5	97.5	96.5	95.8	96.2	49.8	701.7
60,0°	137.1	120.9	107.9	100.7	100.2	95.4	88.5	86.8	86.3	85.0	85.1	48.3	750.0
62,5°	120.2	105.6	96.5	93.8	89.2	80.7	76.1	75.2	74.5	72.5	72.3	46.0	796.0
65,0°	103.2	92.1	87.2	82.7	74.1	66.9	63.7	62.8	63.5	59.8	59.3	43.9	839.8
67,5°	79.9	73.1	69.4	64.1	58.1	54.4	51.9	51.9	53.0	49.0	48.0	39.6	879.5
70,0°	59.9	55.4	52.2	49.6	47.6	45.3	41.9	41.0	41.2	36.5	35.7	34.9	914.4
72,5°	44.5	42.2	40.2	39.5	38.4	35.2	31.1	29.9	28.7	24.4	23.5	30.4	944.8
75,0°	32.9	31.4	31.0	30.7	29.2	25.4	20.6	18.2	15.7	12.8	12.1	25.2	969.9
77,5°	22.0	21.6	20.9	19.9	17.6	14.7	11.7	9.7	7.7	5.2	5.0	17.3	987.2
80,0°	11.8	11.1	10.5	9.8	8.8	7.5	6.0	4.8	3.6	2.0	1.8	8.9	996.1
82,5°	5.5	5.1	4.9	4.6	4.3	3.7	3.0	2.4	1.8	1.1	1.0	2.9	999.0
85,0°	2.0	1.9	1.9	1.8	1.6	1.4	1.2	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> 59540_24
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	21180	136.6	143.6	140.1
95	241	252	20096	128.0	134.4	131.2
90	229	250	19095	120.3	126.2	123.2
85	216	248	18011	112.0	117.6	114.8
80	203	246	16927	104.0	109.1	106.6
75	190	243	15843	96.3	101.0	98.6
70	178	241	14843	89.3	93.7	91.5
65	165	238	13759	82.0	86.0	84.0
60	152	235	12675	74.8	78.5	76.6
55	140	232	11674	68.3	71.6	69.9
50	127	229	10590	61.4	64.3	62.8
45	114	225	9506	54.6	57.3	56.0
40	102	221	8505	48.5	50.8	49.6
35	89	216	7421	42.0	44.0	43.0
30	76	210	6337	35.7	37.3	36.5
25	63	203	5253	29.6	30.8	30.2
20	51	195	4253	23.9	25.0	24.4
15	38	184	3169	18.1	18.9	18.5
10	25	169	2085	12.3	12.8	12.6

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	21180	133.6	138.1	135.8
95	241	252	20096	125.4	129.6	127.5
90	229	250	19095	118.0	122.0	120.0
85	216	248	18011	110.2	113.9	112.0
80	203	246	16927	102.6	106.0	104.3
75	191	244	15926	95.7	98.9	97.3
70	178	241	14842	88.5	91.3	89.9
65	165	238	13758	81.3	83.9	82.6
60	152	235	12674	74.3	76.7	75.5
55	140	232	11674	67.9	70.1	69.0
50	127	229	10590	61.2	63.1	62.2
45	114	225	9506	54.5	56.2	55.4
40	102	221	8505	48.5	50.1	49.3
35	89	216	7421	42.1	43.4	42.8
30	76	210	6337	35.7	36.9	36.3
25	64	204	5337	30.0	31.0	30.5
20	51	195	4253	24.0	24.8	24.4
15	38	184	3169	18.2	18.7	18.4
10	26	171	2168	12.8	13.2	13.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> 59540_24
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	21180	134.8	140.4	137.6
95	241	252	20095	126.4	131.6	129.0
90	229	250	19095	118.8	123.7	121.2
85	216	248	18011	110.9	115.4	113.2
80	203	246	16927	103.1	107.3	105.2
75	191	244	15926	96.2	100.1	98.2
70	178	241	14842	88.8	92.3	90.6
65	165	238	13758	81.5	84.8	83.2
60	152	235	12674	74.5	77.4	76.0
55	140	232	11674	68.0	70.7	69.4
50	127	229	10590	61.2	63.6	62.4
45	114	225	9506	54.5	56.7	55.6
40	102	221	8505	48.5	50.4	49.4
35	89	216	7421	41.9	43.6	42.8
30	76	210	6337	35.7	37.0	36.4
25	64	204	5337	30.0	31.1	30.6
20	51	195	4253	24.0	24.9	24.4
15	38	184	3169	18.1	18.7	18.4
10	26	171	2168	12.8	13.2	13.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3V31V08NB</b> <b>EAN: 4069025151148</b>	<b>LP number</b> <b>59540_24</b>
--	--	-------------------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	21180.0	136.6
5.0	21180.0	133.6
15.0	21180.0	134.8