




Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
	Version	post-top or side-entry mounting, NEMA 7 pin (DALI)
	Optic	asymmetric, extremely wide distribution (P0.8a)
	Cover	toughened safety glass
	Lamps	LED 2200 K CRI ≥ 70
	Controlgear	ECG-DALI Plus
Rated values	Net luminous flux = 1870 lm Power consumption = 15.8 W Luminous efficacy = 118.4 lm/W	serial documentation 18.01.2024
		

Luminous intensity in cd/klm
C180-0
C195-15
C200-20
C270-90
Imax: 879 cd/klm

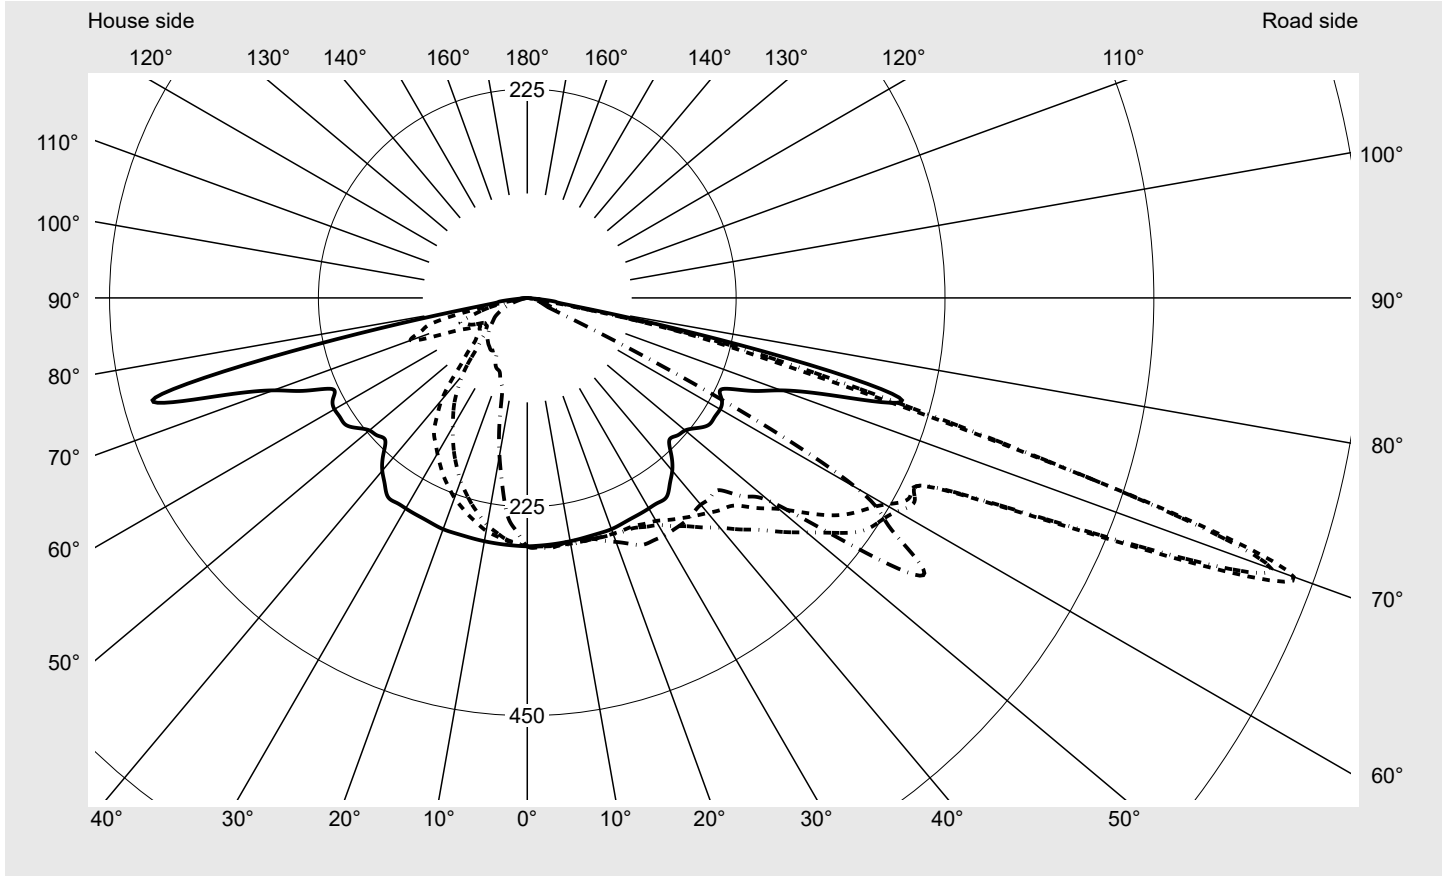

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	878.7
Imax 80°	57.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
--	--	------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

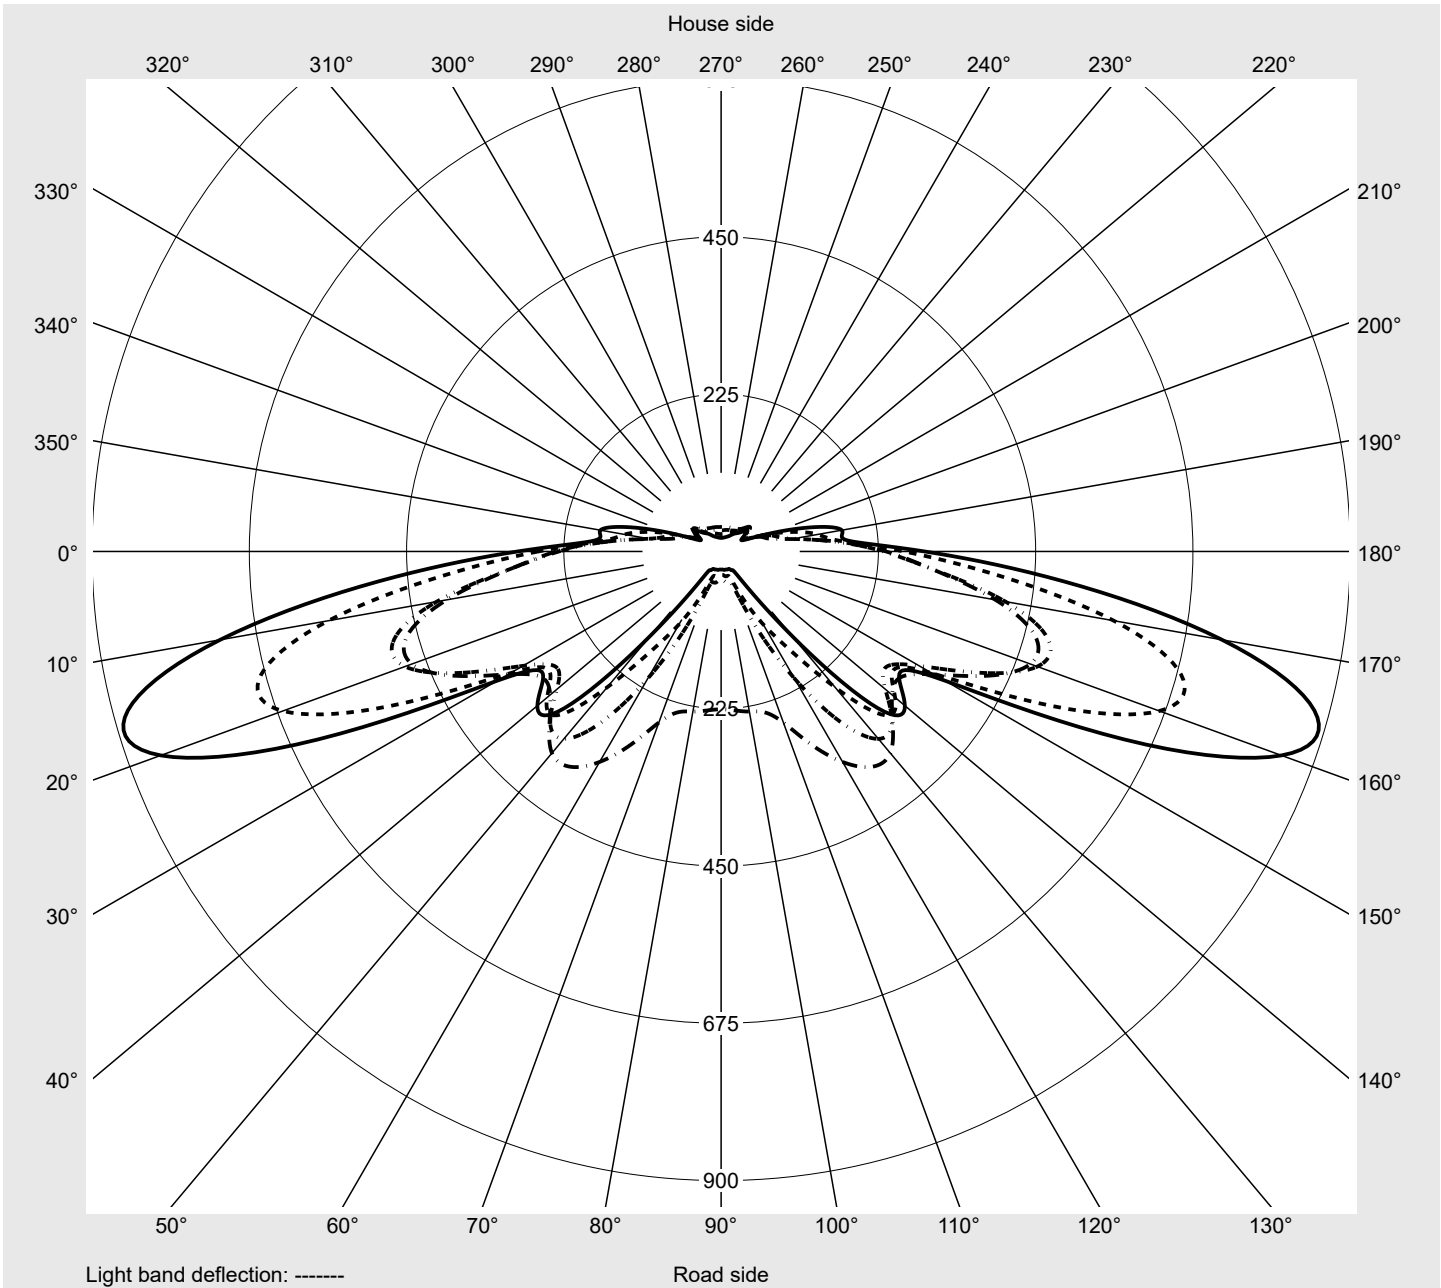

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	267.2	267.2	267.4	267.7	268.0	268.2	268.3	268.4	268.7	268.6	268.6	268.7	268.7
5,0°	266.9	266.9	267.2	267.8	268.6	268.9	269.1	269.3	269.8	269.6	269.6	269.8	269.9
7,5°	266.5	266.7	267.4	268.3	269.0	269.1	269.0	269.1	269.2	269.0	268.6	268.3	268.2
10,0°	266.2	266.6	267.5	268.8	269.4	269.4	269.0	268.9	268.7	268.3	267.5	266.8	266.5
12,5°	265.7	266.8	267.7	268.9	269.3	269.2	268.7	268.4	268.0	267.7	267.2	266.8	266.7
15,0°	265.2	267.0	267.9	269.1	269.2	269.1	268.3	267.9	267.3	267.0	266.9	266.8	267.0
17,5°	265.2	267.9	268.8	269.7	270.1	270.0	269.8	269.8	269.9	270.4	270.8	271.1	271.6
20,0°	265.1	268.9	269.6	270.3	271.0	270.8	271.2	271.7	272.4	273.8	274.7	275.4	276.3
22,5°	264.0	268.4	269.8	270.7	272.2	273.3	274.8	276.9	278.7	280.6	282.2	283.8	285.0
25,0°	262.8	268.0	269.9	271.2	273.4	275.7	278.4	282.1	285.0	287.4	289.7	292.2	293.7
27,5°	262.3	269.0	271.7	274.3	277.9	281.8	286.1	291.1	295.3	299.0	301.4	302.9	302.7
30,0°	261.9	269.9	273.5	277.4	282.5	287.8	293.9	300.0	305.5	310.6	313.1	313.5	311.7
32,5°	261.8	271.7	277.3	283.5	291.4	299.5	307.7	315.0	321.0	325.6	326.4	323.2	318.0
35,0°	261.7	273.6	281.1	289.6	300.3	311.1	321.4	329.9	336.4	340.6	339.8	332.9	324.3
37,5°	252.3	268.4	281.4	296.0	311.7	326.6	338.9	348.1	353.7	354.6	350.3	339.3	327.6
40,0°	243.0	263.2	281.8	302.4	323.1	342.1	356.4	366.4	370.9	368.7	360.7	345.6	330.9
42,5°	229.8	256.4	281.5	309.4	338.2	363.9	378.3	385.7	385.6	377.9	365.2	348.0	332.0
45,0°	216.5	249.6	281.2	316.3	353.3	385.7	400.3	405.0	400.3	387.0	369.7	350.4	333.1
47,5°	219.3	258.6	295.9	335.0	373.2	403.4	416.6	415.9	404.4	385.7	366.0	350.2	338.2
50,0°	222.0	267.6	310.6	353.7	393.0	421.0	433.0	426.9	408.5	384.3	362.2	350.0	343.3
52,5°	230.3	281.2	331.6	380.9	415.7	432.1	429.8	415.1	391.8	372.1	363.5	370.8	388.4
55,0°	238.5	294.7	352.7	408.1	438.3	443.1	426.6	403.4	375.0	359.8	364.8	391.6	433.4
57,5°	239.2	300.2	368.4	426.7	449.2	436.9	401.3	371.3	353.4	354.2	384.0	423.0	459.6
60,0°	239.9	305.7	384.0	445.2	460.1	430.6	376.1	339.2	331.9	348.6	403.2	454.3	485.7
62,5°	236.0	306.5	398.6	464.7	470.8	420.8	351.7	313.7	319.3	347.2	376.6	376.0	347.7
65,0°	232.2	307.3	413.1	484.1	481.4	410.9	327.3	288.2	306.7	345.7	350.0	297.8	209.7
67,5°	261.7	400.0	570.4	681.4	667.3	523.6	348.4	299.5	324.9	331.4	253.7	172.7	120.4
70,0°	291.2	492.6	727.8	878.7	853.1	636.3	369.5	310.8	343.1	317.0	157.5	47.7	31.0
72,5°	353.0	430.5	526.3	594.6	600.5	549.8	505.8	527.8	350.6	186.2	90.1	34.6	25.1
75,0°	414.8	368.5	324.8	310.5	347.9	463.4	642.1	744.8	358.1	55.4	22.7	21.6	19.3
77,5°	236.0	205.6	178.8	168.2	183.7	239.0	334.0	387.5	184.9	33.3	17.6	16.7	14.7
80,0°	57.3	42.7	32.7	25.9	19.4	14.6	25.9	30.2	11.7	11.3	12.5	11.9	10.0
82,5°	30.0	22.6	17.5	14.0	10.7	8.3	13.9	16.1	6.8	6.6	7.4	7.1	6.4
85,0°	2.7	2.5	2.3	2.2	2.1	2.0	2.0	2.0	2.0	2.0	2.3	2.4	2.7
87,5°	1.4	1.3	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5
2,5°	268.8	268.7	268.8	268.9	268.9	269.0	266.5	265.7	264.9	264.3	263.2	262.1	260.9
5,0°	270.0	269.8	270.0	270.2	270.3	270.5	265.5	264.0	262.3	261.0	259.0	256.8	254.3
7,5°	268.1	268.0	267.8	268.0	268.1	268.3	264.6	261.7	258.5	254.8	250.1	245.2	240.0
10,0°	266.2	266.2	265.6	265.7	265.9	266.2	263.7	259.4	254.8	248.5	241.2	233.7	225.8
12,5°	266.6	266.7	266.6	266.8	267.1	267.4	262.2	256.2	248.7	239.4	229.0	218.0	206.6
15,0°	267.0	267.3	267.5	267.9	268.3	268.7	260.7	253.0	242.7	230.3	216.7	202.2	187.3
17,5°	271.9	272.4	272.7	273.3	273.7	274.2	260.0	249.6	236.0	220.1	202.7	184.7	166.5
20,0°	276.9	277.5	277.9	278.7	279.1	279.7	259.3	246.2	229.2	209.9	188.8	167.2	145.7
22,5°	285.7	286.0	285.3	285.9	286.0	286.6	256.1	240.7	220.9	197.9	173.1	148.9	124.7
25,0°	294.5	294.4	292.7	293.2	293.0	293.5	253.0	235.1	212.5	186.0	157.4	130.7	103.7
27,5°	301.7	299.6	296.6	295.1	294.3	294.5	249.8	229.0	203.1	173.2	142.1	112.9	90.5
30,0°	308.9	304.7	300.5	297.1	295.6	295.6	246.5	222.9	193.6	160.4	126.8	95.2	77.3
32,5°	313.0	307.3	302.0	297.5	295.4	295.3	243.8	216.9	184.3	148.5	113.2	85.2	75.5
35,0°	317.0	310.0	303.6	298.0	295.1	294.9	241.1	211.0	175.1	136.5	99.5	75.1	73.7
37,5°	317.8	309.7	303.3	296.8	293.1	292.9	227.5	194.9	159.3	122.5	89.6	70.6	71.2
40,0°	318.5	309.4	303.1	295.7	291.1	290.8	213.8	178.8	143.5	108.6	79.7	66.1	68.6
42,5°	318.9	309.7	303.7	297.1	292.4	291.8	194.6	156.5	121.9	92.6	71.9	63.8	66.0
45,0°	319.2	310.1	304.3	298.5	293.8	292.9	175.4	134.2	100.3	76.6	64.1	61.5	63.3
47,5°	329.8	326.0	323.9	321.0	317.3	316.6	170.5	122.9	87.3	67.9	61.3	60.6	62.1
50,0°	340.3	341.9	343.4	343.5	340.8	340.4	165.5	111.6	74.4	59.3	58.4	59.8	60.9
52,5°	405.0	419.9	430.4	434.7	431.6	430.6	167.0	108.2	68.4	56.2	56.5	57.5	57.6
55,0°	469.7	498.0	517.3	525.9	522.3	520.8	168.4	104.8	62.4	53.0	54.6	55.3	54.3
57,5°	478.3	480.2	474.1	472.9	468.6	465.7	167.5	102.3	61.0	53.3	50.4	50.0	50.6
60,0°	486.8	462.4	430.8	419.9	414.9	410.5	166.7	99.7	59.6	53.6	46.2	44.6	46.9
62,5°	304.6	260.5	238.2	232.6	228.3	225.8	164.6	102.3	71.0	60.8	46.8	42.1	46.4
65,0°	122.3	58.5	45.5	45.3	41.7	41.1	162.5	104.9	82.5	68.0	47.5	39.6	45.8
67,5°	75.0	42.9	36.1	36.0	33.8	33.5	171.9	140.1	107.9	72.2	44.8	36.5	43.4
70,0°	27.6	27.3	26.7	26.8	26.0	25.9	181.3	175.3	133.4	76.4	42.1	33.3	41.1
72,5°	22.7	22.0	21.3	21.1	20.5	20.3	265.1	189.7	120.0	62.2	33.7	27.5	35.0
75,0°	17.7	16.6	15.9	15.3	15.0	14.8	348.9	204.0	106.7	47.9	25.3	21.8	29.0
77,5°	13.1	12.5	11.5	11.1	10.8	10.6	193.6	113.1	59.4	29.8	17.4	15.8	20.3
80,0°	8.4	8.3	7.2	6.9	6.6	6.5	38.3	22.1	12.2	11.8	9.4	9.8	11.6
82,5°	5.4	5.2	4.5	4.3	4.1	4.0	20.5	12.5	7.6	7.4	6.0	6.3	7.0
85,0°	2.3	2.1	1.8	1.7	1.6	1.5	2.8	2.8	2.9	2.9	2.7	2.7	2.5
87,5°	1.1	1.0	0.9	0.8	0.8	0.7	1.4	1.4	1.5	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	267.5	0.4	0.4
2,5°	259.6	258.4	257.3	256.2	255.1	254.3	253.6	253.0	252.6	252.4	252.3	3.2	3.6
5,0°	251.7	249.4	247.1	244.9	242.7	241.1	239.8	238.5	237.7	237.3	237.2	6.2	9.8
7,5°	234.8	230.1	225.2	220.5	216.3	213.0	210.1	207.9	206.2	205.4	204.8	9.0	18.7
10,0°	217.9	210.8	203.4	196.1	189.9	184.8	180.4	177.3	174.8	173.4	172.5	11.5	30.2
12,5°	195.6	185.0	175.2	166.1	158.0	151.4	146.3	142.8	140.4	139.1	138.4	13.6	43.8
15,0°	173.3	159.2	147.1	136.1	126.1	118.1	112.2	108.3	106.0	104.7	104.3	15.5	59.4
17,5°	149.3	133.3	121.0	111.9	105.2	100.8	98.1	96.7	95.8	95.3	95.2	17.6	76.9
20,0°	125.4	107.5	94.9	87.6	84.4	83.5	84.0	85.2	85.7	85.9	86.1	19.5	96.4
22,5°	105.4	93.2	87.8	86.3	86.0	85.8	85.4	85.1	84.3	83.6	83.3	21.7	118.1
25,0°	85.5	78.9	80.6	84.9	87.6	88.0	86.8	84.9	82.9	81.2	80.5	23.8	141.9
27,5°	81.2	81.9	85.3	88.0	88.0	85.8	82.5	79.3	76.2	74.0	73.1	26.1	168.0
30,0°	77.0	84.8	90.0	91.2	88.3	83.6	78.3	73.6	69.6	66.7	65.7	28.2	196.2
32,5°	79.1	85.7	88.8	87.8	84.1	79.6	75.2	71.9	69.4	67.7	67.1	30.6	226.8
35,0°	81.2	86.7	87.6	84.5	79.9	75.6	72.2	70.2	69.3	68.6	68.4	32.9	259.7
37,5°	76.3	79.2	78.9	77.1	76.1	74.0	71.1	69.2	67.9	67.1	66.7	34.9	294.6
40,0°	71.3	71.6	70.3	69.7	72.4	72.5	70.0	68.2	66.6	65.5	65.1	36.8	331.3
42,5°	67.4	67.5	68.8	69.1	68.9	68.5	66.8	65.5	64.3	63.3	62.9	38.5	369.8
45,0°	63.5	63.4	67.3	68.6	65.4	64.6	63.6	62.8	62.0	61.1	60.7	40.2	410.1
47,5°	62.2	64.8	65.8	64.2	61.6	61.0	60.1	59.3	58.4	57.5	57.2	42.8	452.8
50,0°	60.9	66.1	64.2	59.8	57.9	57.4	56.6	55.8	54.8	53.9	53.6	45.3	498.1
52,5°	59.8	63.6	59.5	55.6	53.9	53.3	52.6	51.7	50.6	49.9	49.7	50.1	548.1
55,0°	58.6	61.0	54.8	51.4	50.0	49.2	48.5	47.6	46.5	45.9	45.9	55.0	603.1
57,5°	57.5	56.2	50.1	47.2	46.0	45.1	44.4	43.8	43.2	42.8	42.8	55.3	658.4
60,0°	56.4	51.4	45.4	43.1	42.0	41.0	40.4	40.0	39.8	39.7	39.6	55.4	713.8
62,5°	54.0	47.8	42.0	39.7	38.3	37.1	36.5	36.0	35.5	35.1	35.0	47.7	761.5
65,0°	51.6	44.2	38.6	36.3	34.6	33.2	32.5	31.9	31.2	30.5	30.5	39.5	800.9
67,5°	48.3	41.4	36.3	33.4	30.6	28.5	27.4	26.5	25.7	25.0	24.9	43.3	844.2
70,0°	45.1	38.6	34.0	30.6	26.6	23.9	22.2	21.1	20.1	19.6	19.4	47.1	891.3
72,5°	38.7	34.3	30.3	25.9	21.5	18.5	16.7	15.5	14.5	14.0	13.8	42.6	933.9
75,0°	32.4	30.0	26.6	21.3	16.4	13.1	11.3	10.0	9.0	8.3	8.1	37.9	971.7
77,5°	22.7	22.3	20.0	15.8	11.7	9.2	7.7	6.6	5.6	4.9	4.7	21.1	992.8
80,0°	13.0	14.5	13.5	10.3	7.0	5.2	4.2	3.1	2.2	1.5	1.3	4.0	996.9
82,5°	7.7	8.3	7.6	6.0	4.2	3.2	2.6	2.0	1.5	1.0	0.9	2.3	999.2
85,0°	2.3	2.1	1.8	1.7	1.5	1.3	1.0	0.8	0.7	0.6	0.6	0.6	999.7
87,5°	1.1	1.0	0.9	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
--	--	------------------------------

siteco

Dimming levels table		environmental temperature: 25°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]	
				start of lifetime	end of lifetime	average	
100	254	254	1870	15.8	15.9	15.8	
95	240	252	1776	15.0	15.2	15.1	
90	226	250	1681	14.1	14.3	14.2	
85	213	248	1592	13.5	13.6	13.6	
80	199	245	1495	12.7	12.9	12.8	
75	186	243	1404	11.9	12.1	12.0	
70	172	240	1306	11.1	11.3	11.2	
65	159	237	1213	10.5	10.6	10.6	
60	146	234	1119	9.8	9.9	9.9	
55	133	230	1025	9.0	9.1	9.0	
50	121	227	938	8.4	8.5	8.4	
45	108	223	842	7.7	7.8	7.8	
40	95	218	746	7.0	7.1	7.0	
35	83	213	656	6.3	6.4	6.4	
30	70	207	558	5.6	5.7	5.6	
26	60	201	482	5.1	5.1	5.1	

Dimming levels table		environmental temperature: 5°C					
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]	
				start of lifetime	end of lifetime	average	
100	254	254	1900	16.0	16.2	16.1	
95	240	252	1804	15.2	15.4	15.3	
90	227	250	1713	14.5	14.6	14.6	
85	213	248	1616	13.7	13.8	13.8	
80	199	245	1517	12.9	13.1	13.0	
75	186	243	1424	12.1	12.3	12.2	
70	173	240	1332	11.4	11.5	11.4	
65	160	237	1237	10.7	10.8	10.8	
60	147	234	1143	9.9	10.1	10.0	
55	134	231	1047	9.2	9.3	9.2	
50	121	227	951	8.5	8.6	8.6	
45	108	223	853	7.8	7.9	7.8	
40	96	218	763	7.1	7.2	7.2	
35	83	213	664	6.4	6.5	6.4	
30	71	207	573	5.8	5.8	5.8	
26	60	201	488	5.2	5.2	5.2	

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1890	15.9	16.0	16.0
95	240	252	1795	15.1	15.3	15.2
90	226	250	1698	14.2	14.4	14.3
85	213	248	1608	13.6	13.7	13.6
80	199	245	1509	12.8	13.0	12.9
75	186	243	1417	12.0	12.2	12.1
70	173	240	1325	11.3	11.4	11.4
65	160	237	1231	10.6	10.7	10.6
60	147	234	1137	9.9	10.0	10.0
55	134	231	1042	9.2	9.3	9.2
50	121	227	947	8.4	8.5	8.4
45	108	223	850	7.7	7.8	7.8
40	95	218	753	7.0	7.1	7.0
35	83	213	661	6.4	6.4	6.4
30	71	207	571	5.8	5.8	5.8
26	60	201	486	5.1	5.2	5.2

Photometric test report

Family Streetlight 21 micro easy LED	Order number: 5XE5U27N08CB EAN: 4058352995259	LP number 59536_76
--	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	1870.0	15.8
5.0	1900.0	16.0
15.0	1890.0	15.9