

Photometric test report

Family
Licross® 21 Opal

Order number: 52TL1D7N46XG
EAN: 4058352055397

LP number
59520_259




Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG
Rated values Net luminous flux = 6200 lm
 Power consumption = 34.9 W
 Luminous efficacy = 177.7 lm/W

serial
documentation
09.02.2024

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 294 cd/klm

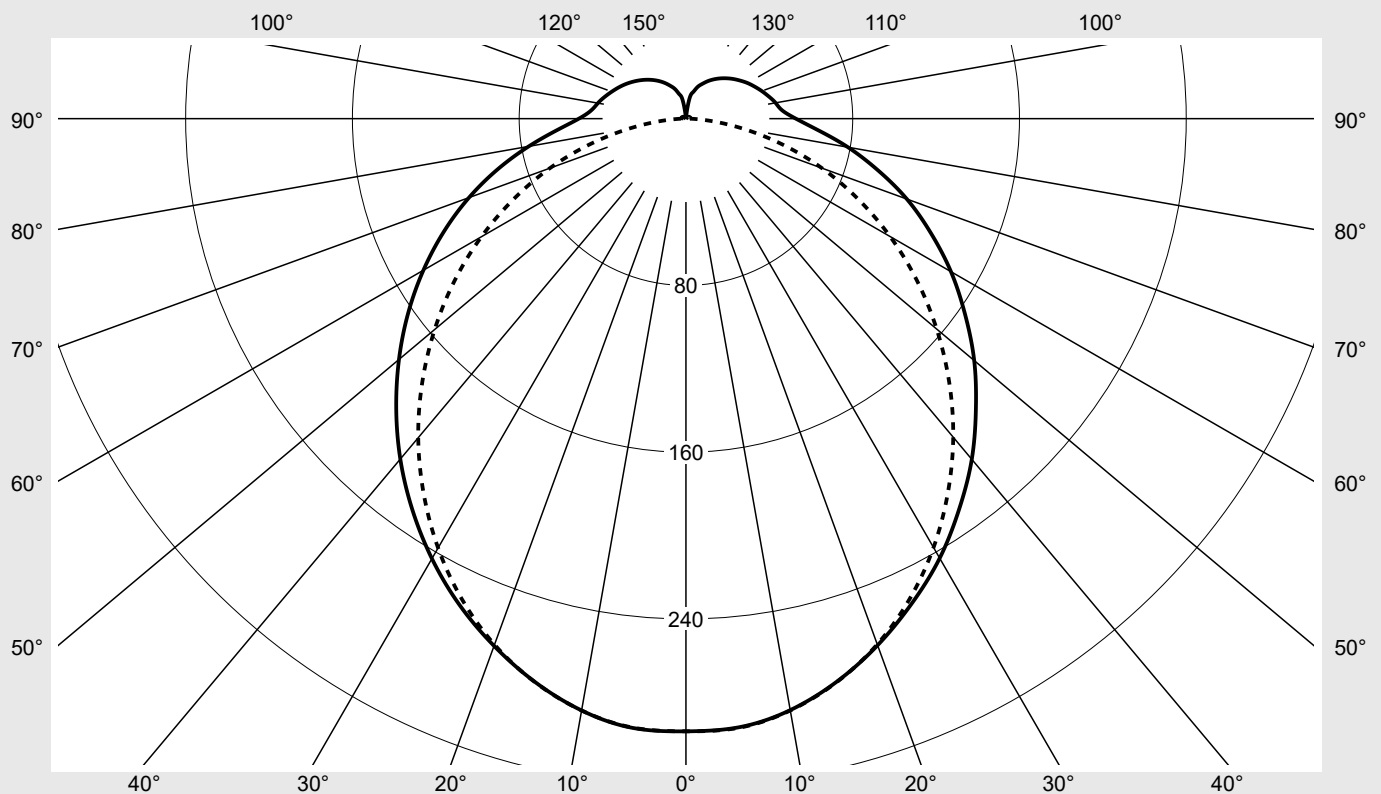

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1D7N46XG EAN: 4058352055397	LP number 59520_259
--	--	--------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1D7N46XG EAN: 4058352055397	LP number 59520_259
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1D7N46XG EAN: 4058352055397	LP number 59520_259
-----------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.1	21.7	20.6	22.1	22.6	19.8	21.3	20.2	21.8	22.3
	3H	22.0	23.5	22.5	23.9	24.5	21.3	22.8	21.8	23.2	23.7
	4H	22.8	24.1	23.4	24.7	25.2	21.8	23.2	22.3	23.7	24.2
	6H	23.6	24.8	24.2	25.3	26.0	22.2	23.4	22.7	24.0	24.5
	8H	24.0	25.1	24.6	25.7	26.3	22.3	23.5	22.9	24.1	24.7
	12H	24.3	25.4	24.9	25.9	26.6	22.4	23.5	22.9	24.0	24.7
4H	2H	20.8	22.1	21.3	22.6	23.2	20.5	21.8	21.0	22.3	22.9
	3H	22.8	24.0	23.4	24.5	25.1	22.1	23.3	22.7	23.8	24.4
	4H	23.8	24.9	24.4	25.4	26.1	22.8	23.9	23.4	24.4	25.1
	6H	24.8	25.7	25.4	26.3	26.9	23.3	24.2	23.9	24.8	25.5
	8H	25.3	26.1	25.9	26.7	27.4	23.5	24.3	24.1	25.0	25.6
	12H	25.7	26.4	26.3	27.0	27.7	23.6	24.3	24.2	24.9	25.7
8H	4H	24.1	25.0	24.8	25.6	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.3	26.0	25.9	26.6	27.3	23.9	24.6	24.6	25.3	26.0
	8H	25.9	26.5	26.5	27.1	27.9	24.2	24.8	24.8	25.5	26.2
	12H	26.4	26.9	27.1	27.6	28.4	24.3	24.8	25.0	25.5	26.3
12H	4H	24.1	24.9	24.8	25.5	26.2	23.3	24.0	23.9	24.6	25.4
	6H	25.3	25.9	26.0	26.6	27.3	24.1	24.6	24.7	25.3	26.1
	8H	26.0	26.5	26.6	27.2	27.9	24.4	24.9	25.0	25.6	26.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500	H(C0) = 25	H(C180) = 25
			B = 76	H(C90) = 25	H(C270) = 25

C-planes	0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²											
45°	11385.4	11372.3	11798.4	13509.5	11845.9	11382.0	11376.0	11367.5	11808.9	13534.0	11851.2	11396.4
50°	10972.2	10932.4	11261.4	13026.7	11278.4	10901.9	10923.0	10907.0	11255.8	13053.6	11295.4	10927.3
55°	10542.7	10505.0	10702.1	12523.9	10708.3	10434.6	10495.7	10456.3	10689.9	12546.4	10738.9	10488.8
60°	10173.0	10082.1	10139.2	11957.7	10125.8	9976.9	10077.5	10006.1	10098.9	11974.8	10172.9	10047.0
65°	9775.9	9659.8	9577.6	11305.0	9539.9	9518.9	9665.9	9563.7	9509.8	11315.1	9600.2	9621.4
70°	9420.3	9190.5	8948.8	10557.8	8888.3	9004.9	9251.1	9054.9	8845.1	10557.8	8966.0	9119.1
75°	8980.2	8657.9	8170.2	9493.7	8075.3	8462.7	8804.5	8495.3	8030.3	9479.2	8187.6	8617.3
80°	8625.3	8166.8	7306.8	8001.0	7126.6	7966.7	8368.4	7957.2	7119.2	7970.7	7248.8	8128.7
85°	8345.5	7838.2	6430.8	5907.2	6271.4	7541.9	8110.9	7609.3	6220.0	5839.6	6414.2	7720.7

Photometric test report

Family
Licross® 21 Opal

Order number: 52TL1D7N46XG
EAN: 4058352055397

LP number
59520_259

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

