

Photometric test report

Family
Licross® 21 Opal

Order number: 52TE1DDN445G
EAN: 4058352051955

LP number
59520_89




Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 4500 lm
 Power consumption = 25.8 W
 Luminous efficacy = 174.4 lm/W

serial
documentation
21.02.2024

siteco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 294 cd/klm

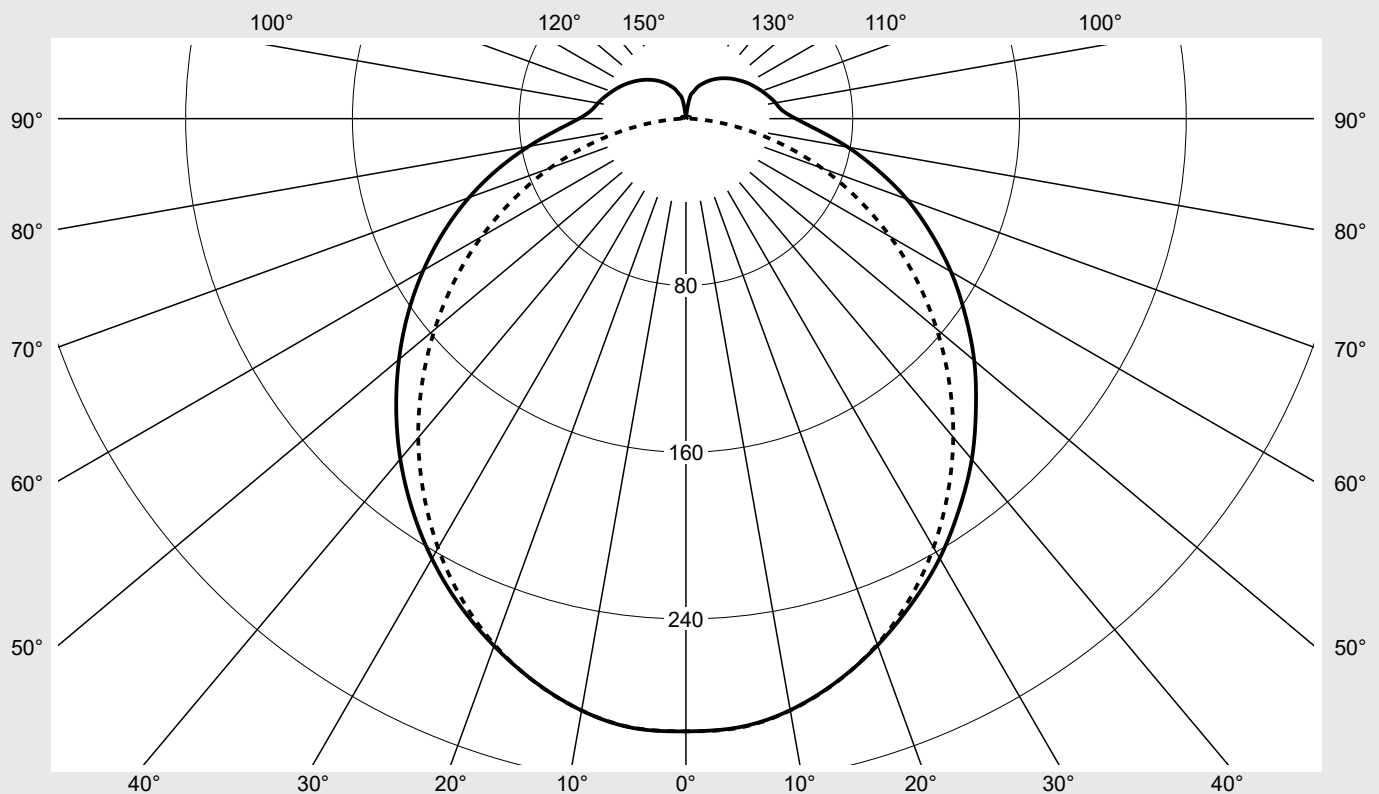

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

| | | |
|--|--|-------------------------------------|
| Family Licross® 21 Opal | Order number: 52TE1DDN445G EAN: 4058352051955 | LP number 59520_89 |
|--|--|-------------------------------------|

| | | |
|---|-----------------------------------|---------------|
| Table of values for luminous intensities | Maximum luminous intensity | siteco |
|---|-----------------------------------|---------------|

| C-planes | 0° | 15° | 30° | 45° | 60° | 75° | 90° | 105° | 120° | 135° | 150° | 165° | 180° |
|----------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | | |
| 0° | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 |
| 5° | 293.1 | 292.7 | 289.9 | 291.0 | 293.1 | 293.0 | 293.3 | 293.1 | 293.1 | 292.5 | 291.2 | 291.6 | 293.4 |
| 10° | 288.1 | 287.8 | 285.0 | 286.0 | 288.1 | 287.9 | 288.3 | 288.0 | 288.0 | 287.5 | 286.2 | 286.7 | 288.3 |
| 15° | 279.6 | 279.4 | 276.6 | 277.6 | 279.6 | 279.4 | 279.8 | 279.5 | 279.5 | 279.0 | 277.7 | 278.4 | 279.8 |
| 20° | 268.8 | 268.4 | 265.5 | 266.2 | 268.1 | 267.8 | 268.3 | 268.1 | 268.0 | 267.5 | 266.6 | 267.8 | 269.2 |
| 25° | 256.5 | 256.4 | 252.9 | 252.4 | 253.9 | 253.4 | 254.1 | 253.8 | 253.8 | 253.6 | 254.0 | 255.9 | 257.2 |
| 30° | 243.5 | 242.9 | 239.1 | 237.4 | 237.4 | 236.9 | 237.6 | 237.4 | 237.5 | 238.5 | 240.0 | 242.5 | 243.7 |
| 35° | 228.6 | 228.2 | 223.9 | 221.1 | 219.2 | 218.5 | 219.1 | 218.9 | 219.7 | 221.9 | 224.6 | 227.5 | 228.9 |
| 40° | 213.3 | 212.5 | 208.1 | 204.0 | 200.4 | 198.8 | 199.5 | 199.5 | 201.1 | 204.3 | 208.6 | 211.7 | 213.2 |
| 45° | 196.7 | 195.9 | 191.2 | 185.9 | 180.8 | 177.8 | 178.6 | 178.3 | 181.6 | 186.0 | 191.4 | 194.8 | 196.6 |
| 50° | 180.5 | 179.0 | 174.4 | 167.8 | 161.5 | 156.5 | 157.0 | 156.9 | 161.7 | 167.6 | 173.9 | 177.7 | 179.7 |
| 55° | 163.4 | 162.0 | 157.2 | 149.2 | 141.7 | 135.1 | 135.2 | 135.5 | 141.8 | 149.1 | 156.1 | 160.5 | 162.7 |
| 60° | 146.8 | 144.8 | 139.8 | 131.0 | 122.1 | 114.1 | 113.1 | 114.2 | 121.9 | 130.6 | 138.3 | 143.3 | 145.4 |
| 65° | 129.6 | 127.7 | 122.3 | 112.9 | 103.0 | 93.4 | 91.0 | 93.7 | 102.6 | 112.1 | 120.5 | 126.2 | 128.1 |
| 70° | 112.8 | 110.6 | 104.4 | 95.0 | 83.9 | 73.2 | 69.4 | 73.2 | 83.4 | 93.6 | 102.3 | 109.1 | 110.8 |
| 75° | 95.2 | 93.5 | 86.3 | 76.8 | 64.8 | 53.0 | 48.0 | 53.1 | 64.1 | 74.9 | 84.3 | 91.4 | 93.3 |
| 80° | 78.9 | 76.8 | 69.4 | 59.0 | 47.0 | 34.5 | 28.0 | 34.2 | 45.8 | 57.3 | 67.7 | 74.1 | 76.6 |
| 85° | 63.7 | 61.7 | 54.7 | 44.0 | 31.4 | 18.8 | 11.3 | 18.6 | 30.6 | 42.7 | 52.6 | 59.2 | 61.9 |
| 90° | 52.7 | 50.3 | 47.2 | 33.6 | 21.8 | 9.7 | 1.7 | 9.7 | 21.3 | 32.8 | 42.6 | 49.1 | 51.4 |
| 95° | 46.3 | 44.0 | 38.4 | 29.9 | 19.4 | 8.9 | 1.8 | 8.9 | 19.3 | 29.6 | 38.3 | 43.8 | 45.6 |
| 100° | 43.6 | 41.6 | 36.5 | 28.4 | 19.0 | 9.0 | 2.1 | 8.7 | 18.6 | 27.9 | 35.8 | 41.3 | 42.9 |
| 105° | 41.1 | 39.4 | 34.3 | 27.0 | 18.2 | 9.1 | 2.1 | 8.8 | 17.9 | 26.7 | 33.7 | 38.6 | 40.4 |
| 110° | 38.7 | 36.7 | 32.3 | 25.7 | 17.6 | 9.2 | 2.0 | 8.7 | 17.0 | 25.1 | 31.7 | 36.0 | 37.9 |
| 115° | 36.4 | 34.4 | 30.4 | 24.3 | 17.0 | 9.3 | 1.9 | 8.8 | 16.4 | 23.6 | 29.8 | 33.7 | 35.5 |
| 120° | 34.1 | 32.2 | 28.7 | 23.1 | 16.5 | 9.4 | 1.8 | 8.8 | 15.7 | 22.3 | 27.9 | 31.4 | 33.2 |
| 125° | 31.8 | 30.1 | 26.8 | 21.8 | 15.8 | 9.4 | 1.6 | 8.8 | 15.0 | 21.0 | 26.0 | 29.2 | 30.9 |
| 130° | 29.6 | 27.9 | 25.1 | 20.7 | 15.3 | 9.5 | 1.4 | 8.7 | 14.3 | 19.7 | 24.1 | 27.1 | 28.6 |
| 135° | 27.4 | 25.8 | 23.3 | 19.5 | 14.6 | 8.1 | 1.3 | 7.6 | 13.7 | 18.5 | 22.3 | 24.9 | 26.4 |
| 140° | 25.2 | 23.7 | 21.6 | 18.3 | 13.6 | 7.0 | 1.3 | 6.4 | 12.7 | 17.1 | 20.5 | 22.8 | 24.2 |
| 145° | 23.0 | 21.6 | 19.8 | 16.6 | 12.1 | 6.4 | 1.2 | 5.9 | 11.1 | 15.6 | 18.8 | 20.7 | 21.9 |
| 150° | 20.7 | 19.6 | 18.1 | 14.3 | 11.0 | 6.2 | 1.3 | 6.0 | 9.5 | 13.3 | 16.9 | 18.6 | 19.6 |
| 155° | 18.4 | 17.4 | 15.6 | 12.5 | 8.2 | 5.5 | 1.3 | 5.2 | 7.5 | 11.1 | 14.5 | 16.4 | 17.3 |
| 160° | 16.1 | 15.3 | 12.6 | 10.0 | 7.9 | 5.1 | 1.4 | 4.6 | 6.8 | 7.9 | 11.7 | 14.3 | 14.9 |
| 165° | 13.1 | 12.1 | 8.6 | 7.8 | 8.1 | 5.4 | 1.4 | 4.8 | 6.9 | 7.0 | 6.9 | 11.2 | 12.1 |
| 170° | 9.8 | 7.7 | 7.3 | 8.0 | 6.5 | 2.9 | 1.4 | 2.2 | 5.4 | 6.7 | 6.3 | 6.6 | 8.9 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Photometric test report

| | | |
|---|--|-------------------------------------|
| Family Licross® 21 Opal | Order number: 52TE1DDN445G EAN: 4058352051955 | LP number 59520_89 |
| Table of values for luminous intensities | | Maximum luminous intensity |
| | | siteco |

| C-planes | 195° | 210° | 225° | 240° | 255° | 270° | 285° | 300° | 315° | 330° | 345° | Phi-zone | Total Phi-zone |
|----------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------------------|----------------|
| γ | Luminous intensity in cd/klm | | | | | | | | | | | Luminous flux in lm/klm | |
| 0° | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 293.9 | 1.8 | 1.8 |
| 5° | 292.9 | 289.8 | 290.9 | 292.8 | 292.8 | 293.2 | 292.8 | 292.9 | 292.3 | 291.2 | 292.0 | 14.0 | 15.7 |
| 10° | 288.0 | 285.0 | 285.8 | 287.9 | 287.8 | 288.3 | 287.9 | 288.0 | 287.3 | 286.3 | 287.0 | 27.3 | 43.1 |
| 15° | 279.5 | 276.7 | 277.5 | 279.4 | 279.4 | 279.9 | 279.5 | 279.5 | 278.9 | 277.9 | 279.0 | 39.6 | 82.6 |
| 20° | 268.9 | 265.7 | 266.2 | 268.0 | 267.9 | 268.5 | 268.2 | 268.1 | 267.5 | 266.6 | 267.7 | 50.2 | 132.8 |
| 25° | 256.9 | 253.4 | 252.5 | 253.8 | 253.6 | 254.3 | 254.0 | 254.0 | 253.5 | 253.8 | 256.1 | 58.9 | 191.7 |
| 30° | 243.4 | 239.6 | 237.7 | 237.4 | 237.1 | 237.8 | 237.6 | 237.8 | 238.3 | 239.7 | 242.3 | 65.6 | 257.3 |
| 35° | 228.5 | 224.4 | 221.4 | 219.4 | 218.7 | 219.4 | 219.3 | 219.8 | 221.8 | 224.6 | 228.0 | 70.0 | 327.3 |
| 40° | 212.7 | 208.2 | 204.2 | 200.7 | 198.9 | 199.8 | 199.8 | 201.1 | 204.3 | 208.6 | 211.9 | 72.3 | 399.6 |
| 45° | 195.8 | 191.1 | 185.9 | 181.0 | 177.8 | 178.9 | 178.7 | 181.7 | 186.2 | 191.6 | 195.6 | 72.3 | 472.0 |
| 50° | 178.6 | 174.0 | 167.6 | 161.4 | 156.5 | 157.3 | 157.3 | 162.0 | 168.0 | 174.3 | 178.3 | 70.5 | 542.5 |
| 55° | 161.2 | 156.5 | 148.8 | 141.5 | 135.3 | 135.5 | 135.8 | 142.2 | 149.7 | 156.9 | 161.8 | 66.9 | 609.4 |
| 60° | 143.7 | 138.7 | 130.1 | 121.6 | 114.2 | 113.3 | 114.6 | 122.5 | 131.3 | 139.3 | 144.4 | 61.7 | 671.1 |
| 65° | 126.5 | 121.0 | 111.8 | 102.3 | 93.3 | 91.1 | 94.0 | 103.2 | 113.1 | 121.8 | 128.0 | 55.2 | 726.3 |
| 70° | 109.1 | 102.8 | 93.5 | 83.0 | 72.9 | 69.4 | 73.6 | 84.1 | 94.6 | 103.5 | 110.4 | 47.6 | 773.9 |
| 75° | 91.6 | 84.7 | 75.4 | 63.7 | 52.5 | 47.9 | 53.5 | 65.0 | 76.2 | 85.9 | 93.4 | 39.0 | 812.9 |
| 80° | 74.9 | 67.7 | 57.5 | 45.8 | 33.9 | 27.9 | 34.5 | 46.6 | 58.5 | 69.1 | 75.6 | 30.2 | 843.1 |
| 85° | 59.9 | 53.1 | 42.6 | 30.4 | 18.3 | 11.1 | 18.9 | 31.3 | 43.7 | 53.8 | 61.1 | 22.2 | 865.3 |
| 90° | 49.1 | 42.6 | 32.8 | 21.3 | 9.6 | 1.7 | 9.7 | 21.6 | 33.2 | 43.3 | 50.0 | 16.9 | 882.1 |
| 95° | 43.4 | 38.0 | 29.6 | 19.2 | 8.8 | 1.8 | 8.9 | 19.4 | 29.7 | 38.6 | 44.5 | 14.9 | 897.1 |
| 100° | 41.0 | 35.9 | 27.9 | 18.7 | 8.8 | 2.1 | 8.9 | 18.7 | 28.1 | 36.1 | 41.8 | 14.0 | 911.1 |
| 105° | 38.7 | 33.7 | 26.5 | 17.8 | 8.7 | 2.1 | 9.0 | 18.1 | 27.0 | 34.2 | 39.3 | 13.1 | 924.2 |
| 110° | 35.9 | 31.6 | 25.0 | 17.1 | 8.8 | 2.0 | 9.1 | 17.4 | 25.5 | 32.1 | 36.6 | 12.0 | 936.2 |
| 115° | 33.6 | 29.7 | 23.6 | 16.4 | 8.7 | 1.9 | 9.3 | 16.9 | 24.2 | 30.4 | 34.4 | 11.0 | 947.2 |
| 120° | 31.4 | 27.9 | 22.4 | 15.7 | 8.8 | 1.8 | 9.3 | 16.2 | 22.9 | 28.6 | 32.2 | 9.9 | 957.1 |
| 125° | 29.2 | 26.0 | 21.1 | 15.0 | 8.7 | 1.6 | 9.4 | 15.7 | 21.7 | 26.8 | 30.1 | 8.9 | 966.0 |
| 130° | 27.0 | 24.2 | 19.8 | 14.4 | 8.7 | 1.4 | 9.4 | 15.1 | 20.5 | 24.9 | 27.8 | 7.8 | 973.7 |
| 135° | 24.9 | 22.4 | 18.6 | 13.7 | 7.3 | 1.3 | 8.2 | 14.6 | 19.3 | 23.2 | 25.8 | 6.7 | 980.4 |
| 140° | 22.7 | 20.6 | 17.3 | 12.7 | 6.4 | 1.3 | 7.0 | 13.5 | 18.0 | 21.5 | 23.6 | 5.6 | 986.0 |
| 145° | 20.6 | 18.9 | 15.7 | 11.3 | 5.8 | 1.2 | 6.5 | 12.0 | 15.8 | 19.8 | 21.6 | 4.5 | 990.5 |
| 150° | 18.5 | 17.0 | 13.4 | 10.2 | 6.1 | 1.3 | 6.3 | 10.3 | 14.2 | 17.9 | 19.5 | 3.5 | 994.0 |
| 155° | 16.4 | 14.6 | 11.8 | 7.5 | 4.9 | 1.3 | 5.8 | 8.1 | 12.0 | 15.5 | 17.4 | 2.6 | 996.6 |
| 160° | 14.2 | 11.8 | 9.1 | 7.1 | 4.6 | 1.4 | 5.2 | 7.3 | 8.7 | 12.7 | 15.3 | 1.8 | 998.3 |
| 165° | 11.1 | 8.0 | 7.1 | 7.6 | 4.8 | 1.4 | 5.5 | 7.3 | 7.6 | 7.6 | 12.0 | 1.1 | 999.4 |
| 170° | 6.9 | 7.3 | 7.0 | 5.8 | 2.1 | 1.4 | 3.1 | 6.1 | 7.5 | 6.2 | 7.2 | 0.6 | 1000.0 |
| 175° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|-----------------------------------|--|------------------------------|
| Family Licross® 21 Opal | Order number: 52TE1DDN445G EAN: 4058352051955 | LP number 59520_89 |
|-----------------------------------|--|------------------------------|

siteco


| UGR-Table | | Standard room | | | | | | | | | |
|-----------------|-----|---------------------|------|------|------|------|--------------------|------|------|------|------|
| Room dimensions | | View crosswise (C0) | | | | | View endwise (C90) | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 19.0 | 20.6 | 19.5 | 21.0 | 21.5 | 18.6 | 20.2 | 19.1 | 20.7 | 21.2 |
| | 3H | 20.9 | 22.4 | 21.4 | 22.8 | 23.3 | 20.2 | 21.7 | 20.7 | 22.1 | 22.6 |
| | 4H | 21.7 | 23.0 | 22.2 | 23.5 | 24.1 | 20.7 | 22.0 | 21.2 | 22.6 | 23.1 |
| | 6H | 22.5 | 23.7 | 23.0 | 24.2 | 24.8 | 21.1 | 22.3 | 21.6 | 22.8 | 23.4 |
| | 8H | 22.9 | 24.0 | 23.5 | 24.6 | 25.2 | 21.2 | 22.4 | 21.8 | 22.9 | 23.5 |
| | 12H | 23.2 | 24.3 | 23.8 | 24.8 | 25.5 | 21.3 | 22.3 | 21.8 | 22.9 | 23.5 |
| 4H | 2H | 19.7 | 21.0 | 20.2 | 21.5 | 22.1 | 19.3 | 20.7 | 19.9 | 21.2 | 21.7 |
| | 3H | 21.7 | 22.8 | 22.3 | 23.4 | 24.0 | 21.0 | 22.2 | 21.6 | 22.7 | 23.3 |
| | 4H | 22.7 | 23.8 | 23.3 | 24.3 | 25.0 | 21.7 | 22.8 | 22.3 | 23.3 | 24.0 |
| | 6H | 23.7 | 24.5 | 24.3 | 25.1 | 25.8 | 22.2 | 23.1 | 22.8 | 23.7 | 24.4 |
| | 8H | 24.1 | 25.0 | 24.8 | 25.6 | 26.3 | 22.4 | 23.2 | 23.0 | 23.8 | 24.5 |
| | 12H | 24.5 | 25.3 | 25.2 | 25.9 | 26.6 | 22.5 | 23.2 | 23.1 | 23.8 | 24.6 |
| 8H | 4H | 23.0 | 23.9 | 23.6 | 24.5 | 25.2 | 22.1 | 22.9 | 22.8 | 23.6 | 24.3 |
| | 6H | 24.2 | 24.9 | 24.8 | 25.5 | 26.2 | 22.8 | 23.5 | 23.5 | 24.1 | 24.9 |
| | 8H | 24.8 | 25.4 | 25.4 | 26.0 | 26.8 | 23.1 | 23.7 | 23.7 | 24.3 | 25.1 |
| | 12H | 25.3 | 25.8 | 26.0 | 26.5 | 27.3 | 23.2 | 23.7 | 23.9 | 24.4 | 25.2 |
| 12H | 4H | 23.0 | 23.8 | 23.6 | 24.4 | 25.1 | 22.2 | 22.9 | 22.8 | 23.5 | 24.3 |
| | 6H | 24.2 | 24.8 | 24.9 | 25.5 | 26.2 | 22.9 | 23.5 | 23.6 | 24.2 | 24.9 |
| | 8H | 24.9 | 25.4 | 25.5 | 26.1 | 26.8 | 23.2 | 23.8 | 23.9 | 24.4 | 25.2 |

| Luminance table | | Max. for $\gamma \geq 65^\circ$ | | | | | | | | | | Photometric dimensions in mm: | | L = 1500 | H(C0) = 25 | H(C180) = 25 |
|-----------------|----------|---------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------------|-------------|--------------|------------|--------------|
| | | | | | | | | | | | | B = 76 | H(C90) = 25 | H(C270) = 25 | | |
| C-planes | γ | 0° | 30° | 60° | 90° | 120° | 150° | 180° | 210° | 240° | 270° | 300° | 330° | | | |
| | | Luminance in cd/m ² | | | | | | | | | | | | | | |
| 45° | | 8263.6 | 8254.1 | 8563.3 | 9805.3 | 8597.8 | 8261.1 | 8256.8 | 8250.6 | 8571.0 | 9823.1 | 8601.7 | 8271.6 | | | |
| 50° | | 7963.7 | 7934.8 | 8173.6 | 9454.9 | 8186.0 | 7912.7 | 7927.9 | 7916.4 | 8169.5 | 9474.4 | 8198.3 | 7931.1 | | | |
| 55° | | 7652.0 | 7624.6 | 7767.7 | 9089.9 | 7772.1 | 7573.5 | 7617.8 | 7589.2 | 7758.8 | 9106.3 | 7794.3 | 7612.8 | | | |
| 60° | | 7383.6 | 7317.7 | 7359.1 | 8679.0 | 7349.4 | 7241.3 | 7314.3 | 7262.5 | 7329.8 | 8691.4 | 7383.5 | 7292.2 | | | |
| 65° | | 7095.4 | 7011.1 | 6951.5 | 8205.3 | 6924.1 | 6908.9 | 7015.5 | 6941.4 | 6902.3 | 8212.6 | 6967.9 | 6983.3 | | | |
| 70° | | 6837.3 | 6670.5 | 6495.1 | 7662.9 | 6451.2 | 6535.8 | 6714.5 | 6572.1 | 6419.9 | 7662.9 | 6507.6 | 6618.7 | | | |
| 75° | | 6517.9 | 6284.0 | 5930.0 | 6890.6 | 5861.1 | 6142.3 | 6390.3 | 6165.9 | 5828.5 | 6880.1 | 5942.6 | 6254.5 | | | |
| 80° | | 6260.3 | 5927.5 | 5303.3 | 5807.2 | 5172.6 | 5782.3 | 6073.9 | 5775.4 | 5167.1 | 5785.2 | 5261.2 | 5899.8 | | | |
| 85° | | 6057.2 | 5689.0 | 4667.5 | 4287.5 | 4551.8 | 5474.0 | 5886.9 | 5522.9 | 4514.5 | 4238.4 | 4655.5 | 5603.8 | | | |

Photometric test report

| | | |
|--|--|-------------------------------------|
| Family Licross® 21 Opal | Order number: 52TE1DDN445G EAN: 4058352051955 | LP number 59520_89 |
|--|--|-------------------------------------|

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

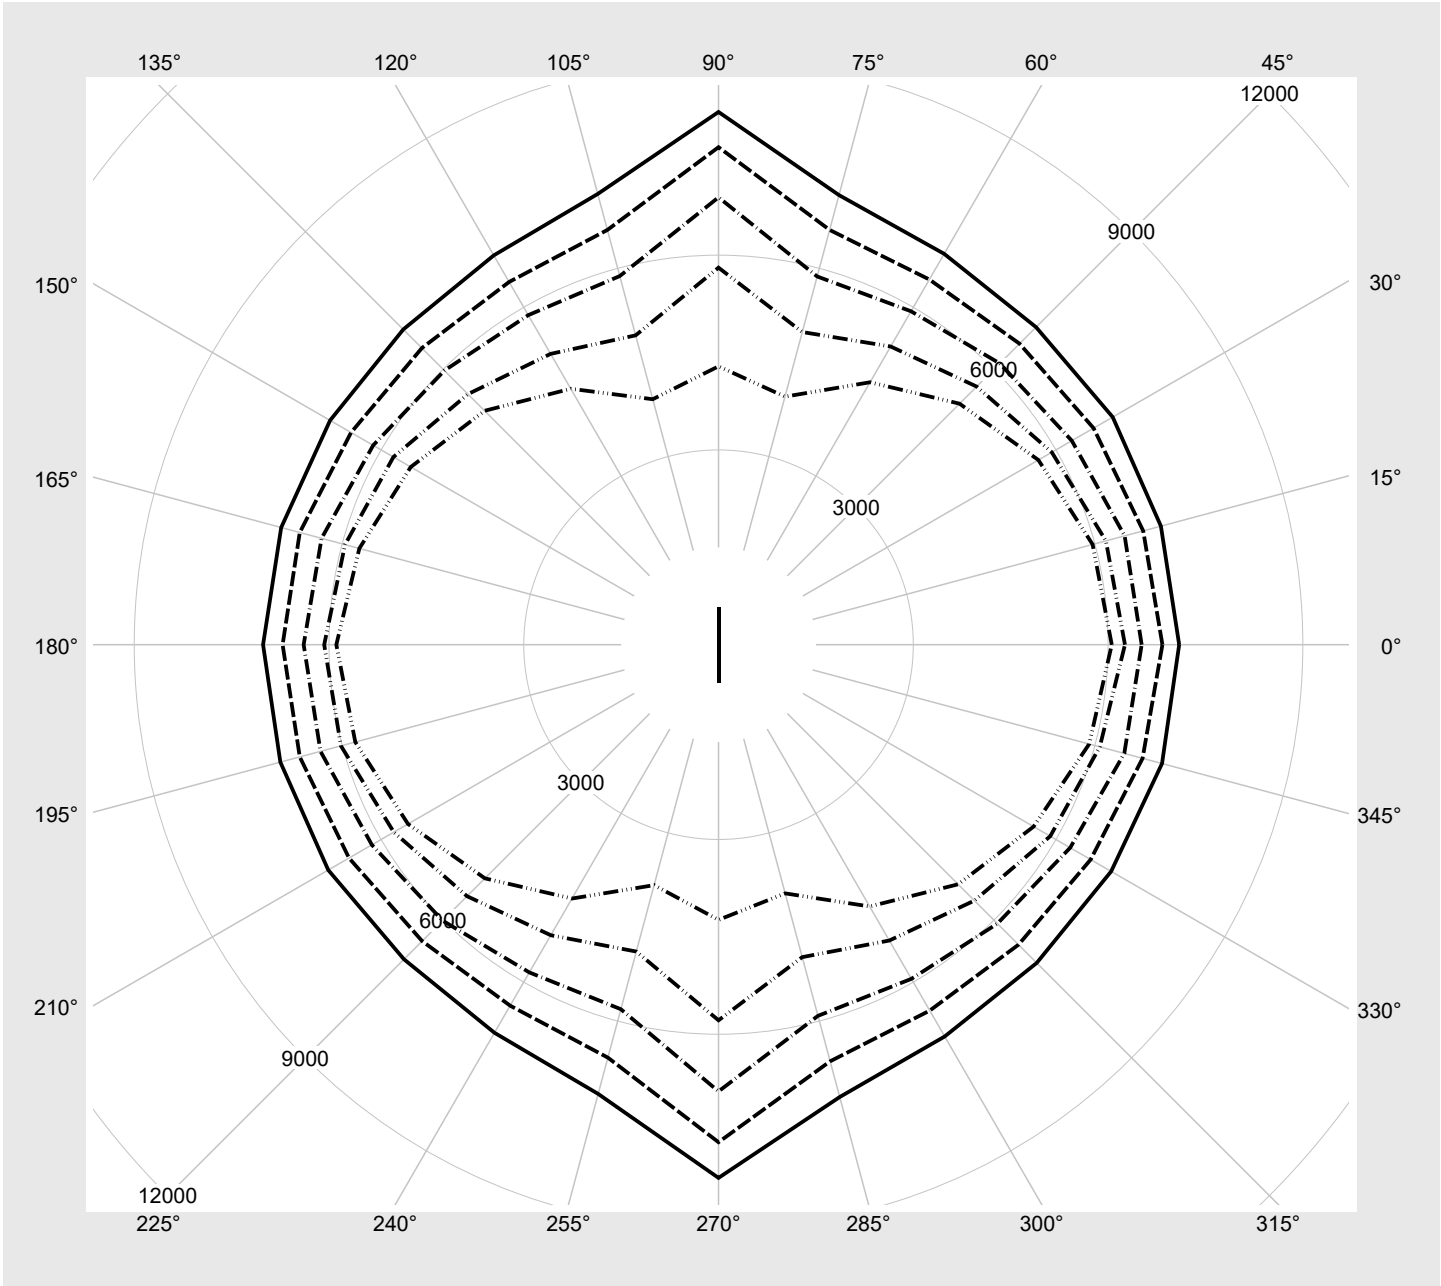

Photometric test report

| | | |
|-----------------------------------|--|------------------------------|
| Family Licross® 21 Opal | Order number: 52TE1DDN445G EAN: 4058352051955 | LP number 59520_89 |
|-----------------------------------|--|------------------------------|

| | | |
|-----------------------------|---------------------------------|---------------|
| Dimming levels table | environmental temperature: 25°C | siteco |
|-----------------------------|---------------------------------|---------------|

| Luminous flux % | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] |
|-----------------|----------------------|---------------------------|--------------------|-----------------------|
| 100 | 254 | 254 | 4500 | 25.8 |
| 95 | 241 | 252 | 4275 | 24.6 |
| 90 | 228 | 250 | 4053 | 23.4 |
| 85 | 215 | 248 | 3825 | 22.2 |
| 80 | 202 | 246 | 3600 | 20.9 |
| 75 | 189 | 243 | 3374 | 19.7 |
| 70 | 176 | 241 | 3145 | 18.4 |
| 65 | 163 | 238 | 2918 | 17.2 |
| 60 | 151 | 235 | 2704 | 16.0 |
| 55 | 138 | 232 | 2475 | 14.7 |
| 50 | 125 | 228 | 2242 | 13.4 |
| 45 | 113 | 224 | 2030 | 12.1 |
| 40 | 100 | 220 | 1796 | 11.4 |
| 35 | 88 | 215 | 1582 | 10.4 |
| 30 | 75 | 209 | 1349 | 9.2 |
| 25 | 63 | 203 | 1131 | 8.0 |
| 20 | 50 | 194 | 897 | 6.7 |
| 18 | 44 | 190 | 789 | 6.2 |